



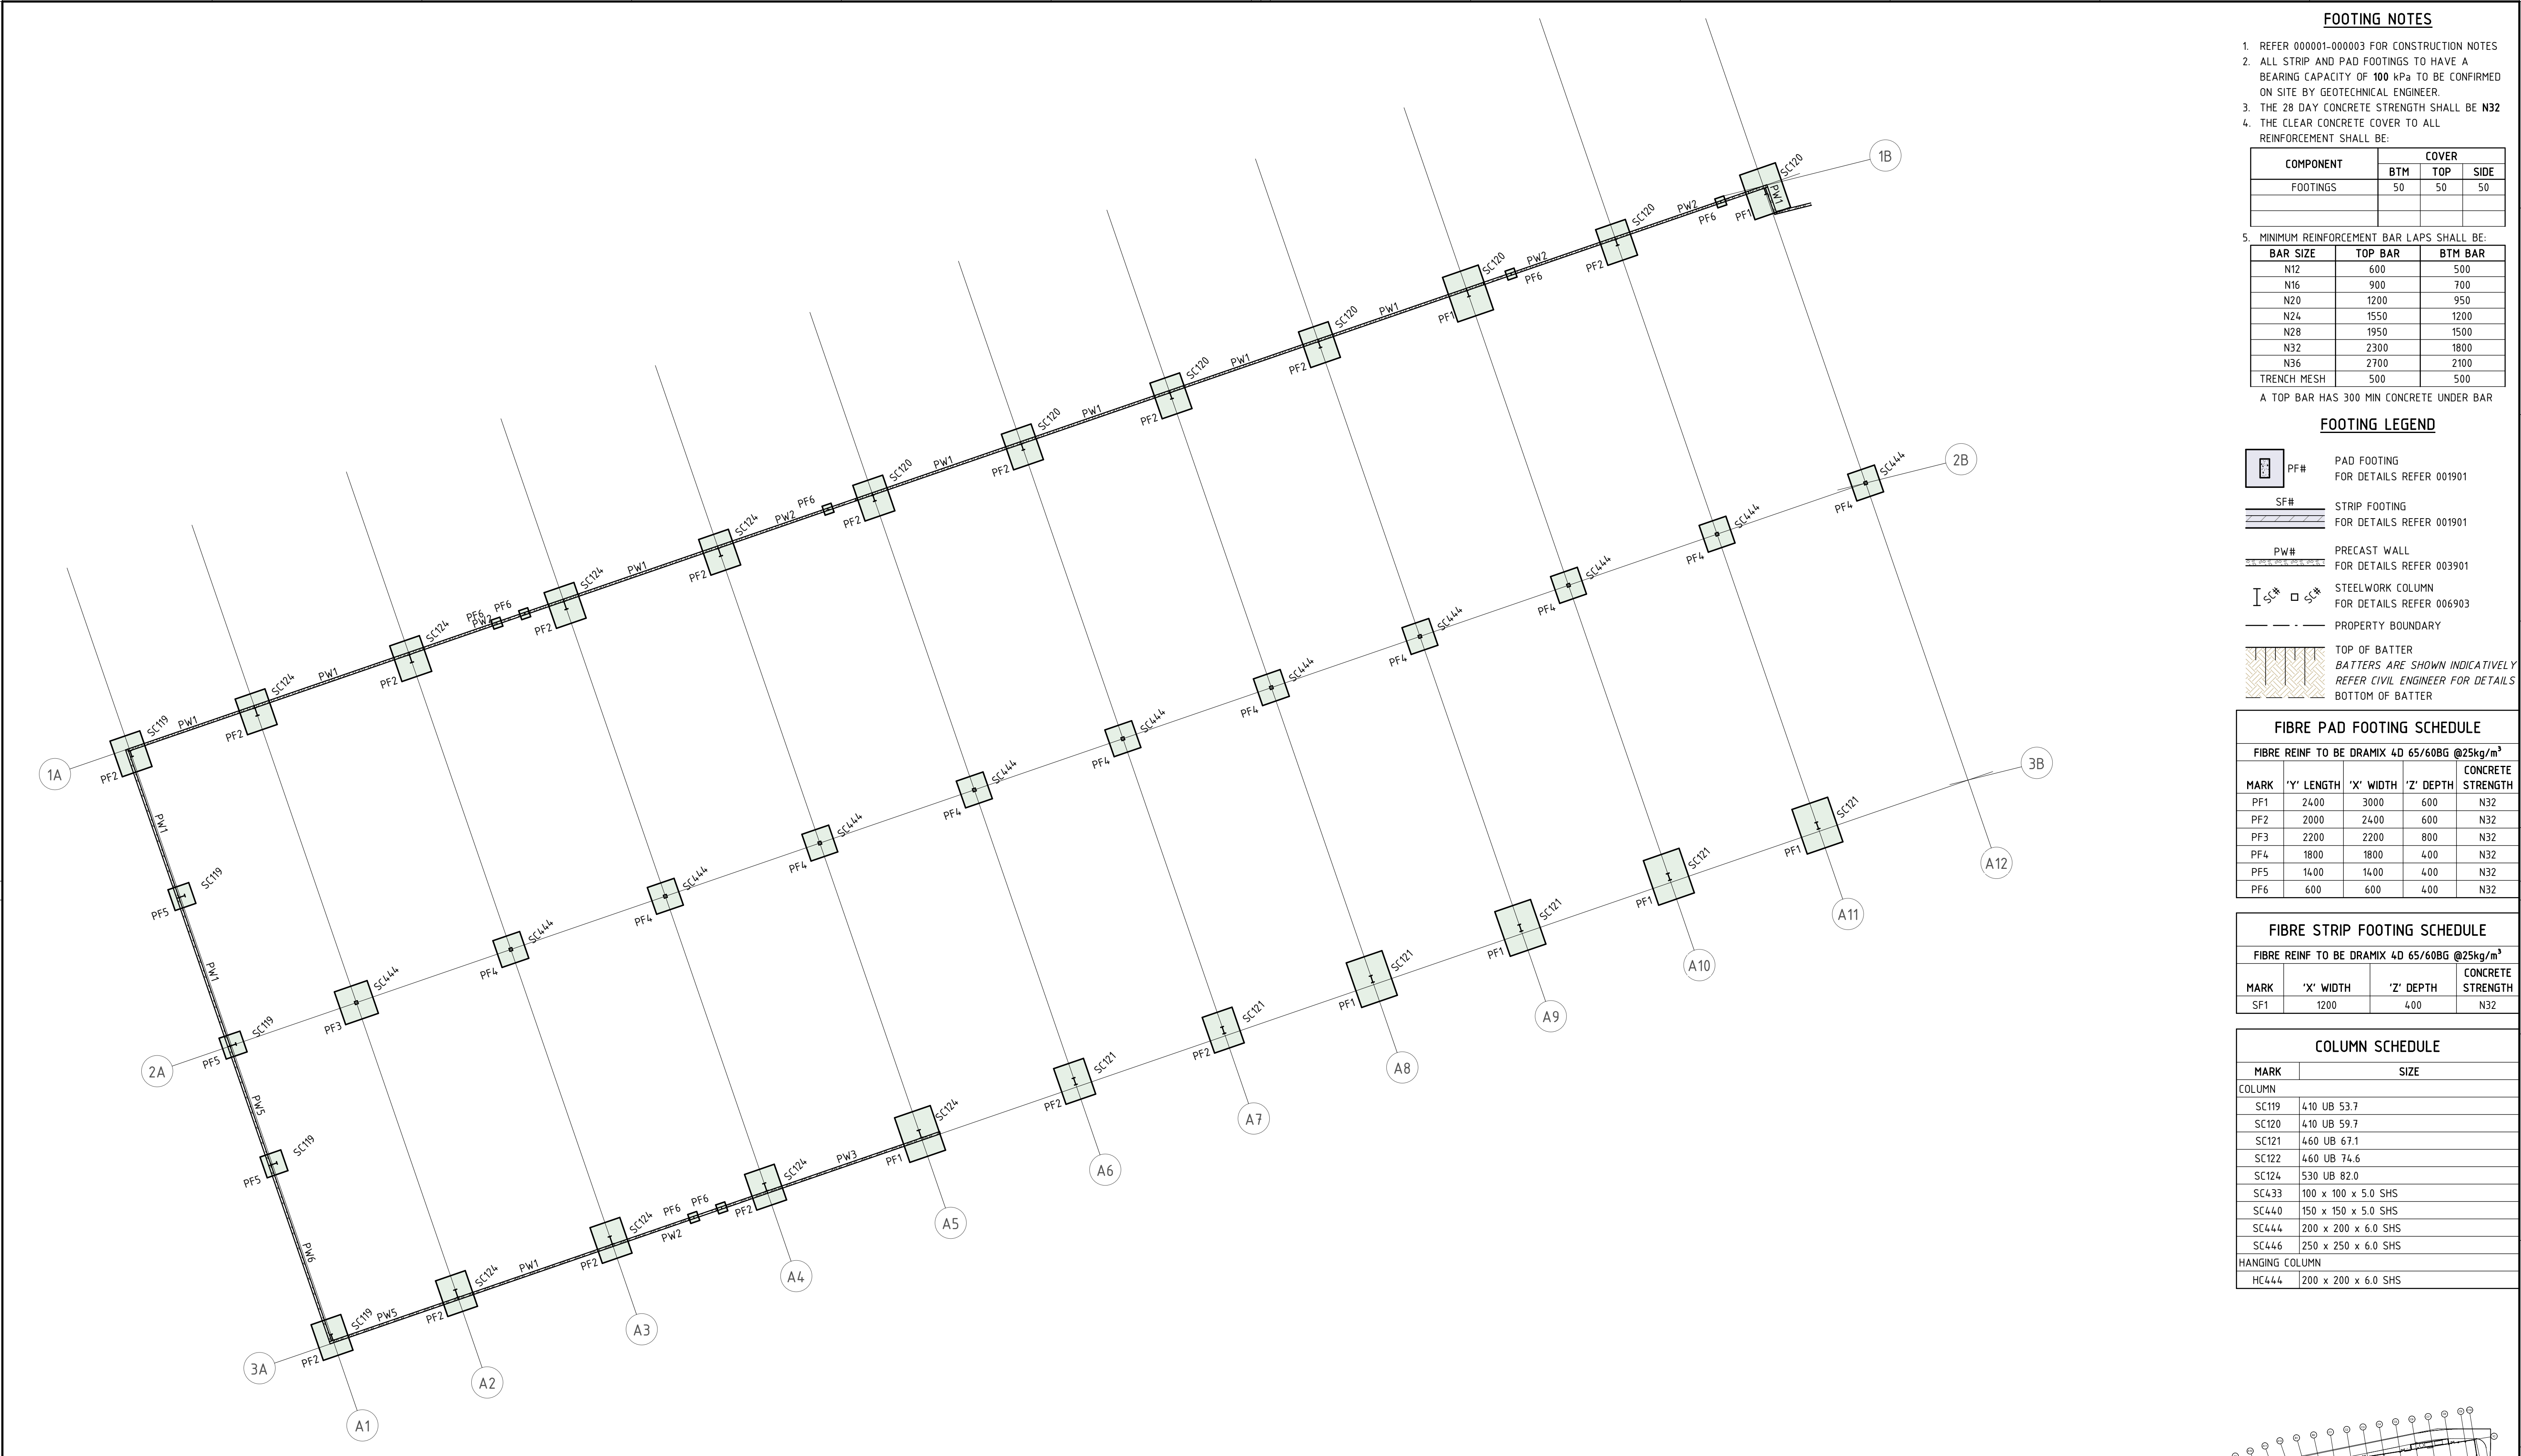

FOUNDATION PLAN – PART 1
SCALE 1 : 200

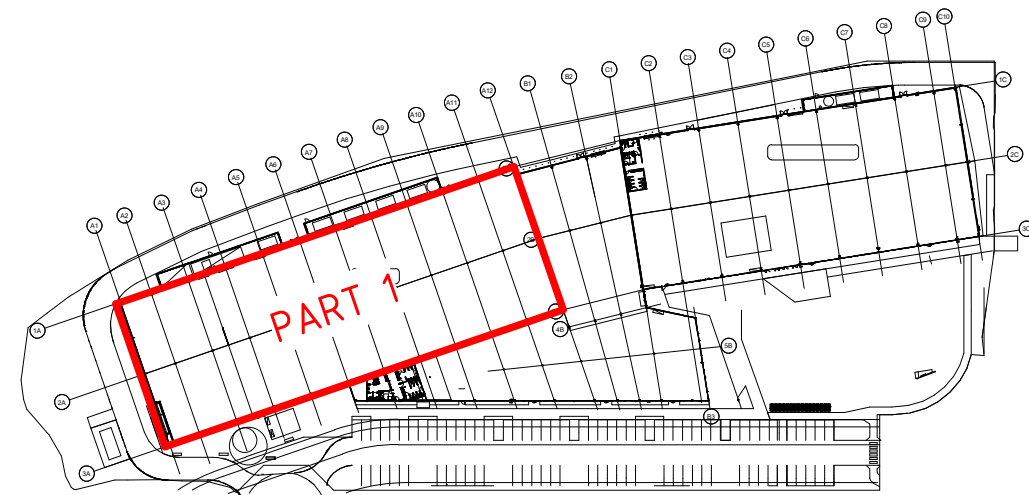

SITE KEY PLAN

FOOTING NOTES

- REFER 000001-000003 FOR CONSTRUCTION NOTES
- ALL STRIP AND PAD FOOTINGS TO HAVE A BEARING CAPACITY OF 100 kPa TO BE CONFIRMED ON SITE BY GEOTECHNICAL ENGINEER.
- THE 28 DAY CONCRETE STRENGTH SHALL BE N32
- THE CLEAR CONCRETE COVER TO ALL REINFORCEMENT SHALL BE:

COMPONENT	COVER		
	BTM	TOP	SIDE
FOOTINGS	50	50	50

5. MINIMUM REINFORCEMENT BAR LAPS SHALL BE:

BAR SIZE	TOP BAR	BTM BAR
N12	600	500
N16	900	700
N20	1200	950
N24	1550	1200
N28	1950	1500
N32	2300	1800
N36	2700	2100
TRENCH MESH	500	500

A TOP BAR HAS 300 MIN CONCRETE UNDER BAR

FOOTING LEGEND

	PF#	PAD FOOTING FOR DETAILS REFER 001901
	SF#	STRIP FOOTING FOR DETAILS REFER 001901
	PW#	PRECAST WALL FOR DETAILS REFER 003901
	I	STEELWORK COLUMN FOR DETAILS REFER 006903
	- - -	PROPERTY BOUNDARY
		TOP OF BATTER BATTERS ARE SHOWN INDICATIVELY REFER CIVIL ENGINEER FOR DETAILS BOTTOM OF BATTER

FIBRE PAD FOOTING SCHEDULE

FIBRE REINF TO BE DRAMIX 4D 65/60BG @25kg/m³				
MARK	'Y' LENGTH	'X' WIDTH	'Z' DEPTH	CONCRETE STRENGTH
PF1	2400	3000	600	N32
PF2	2000	2400	600	N32
PF3	2200	2200	800	N32
PF4	1800	1800	400	N32
PF5	1400	1400	400	N32
PF6	600	600	400	N32

FIBRE STRIP FOOTING SCHEDULE

FIBRE REINF TO BE DRAMIX 4D 65/60BG @25kg/m³			
MARK	'X' WIDTH	'Z' DEPTH	CONCRETE STRENGTH
SF1	1200	400	N32

COLUMN SCHEDULE

MARK	SIZE
COLUMN	
SC119	410 UB 53.7
SC120	410 UB 59.7
SC121	460 UB 67.1
SC122	460 UB 74.6
SC124	530 UB 82.0
SC433	100 x 100 x 5.0 SHS
SC440	150 x 150 x 5.0 SHS
SC444	200 x 200 x 6.0 SHS
SC446	250 x 250 x 6.0 SHS
HANGING COLUMN	
HC444	200 x 200 x 6.0 SHS