


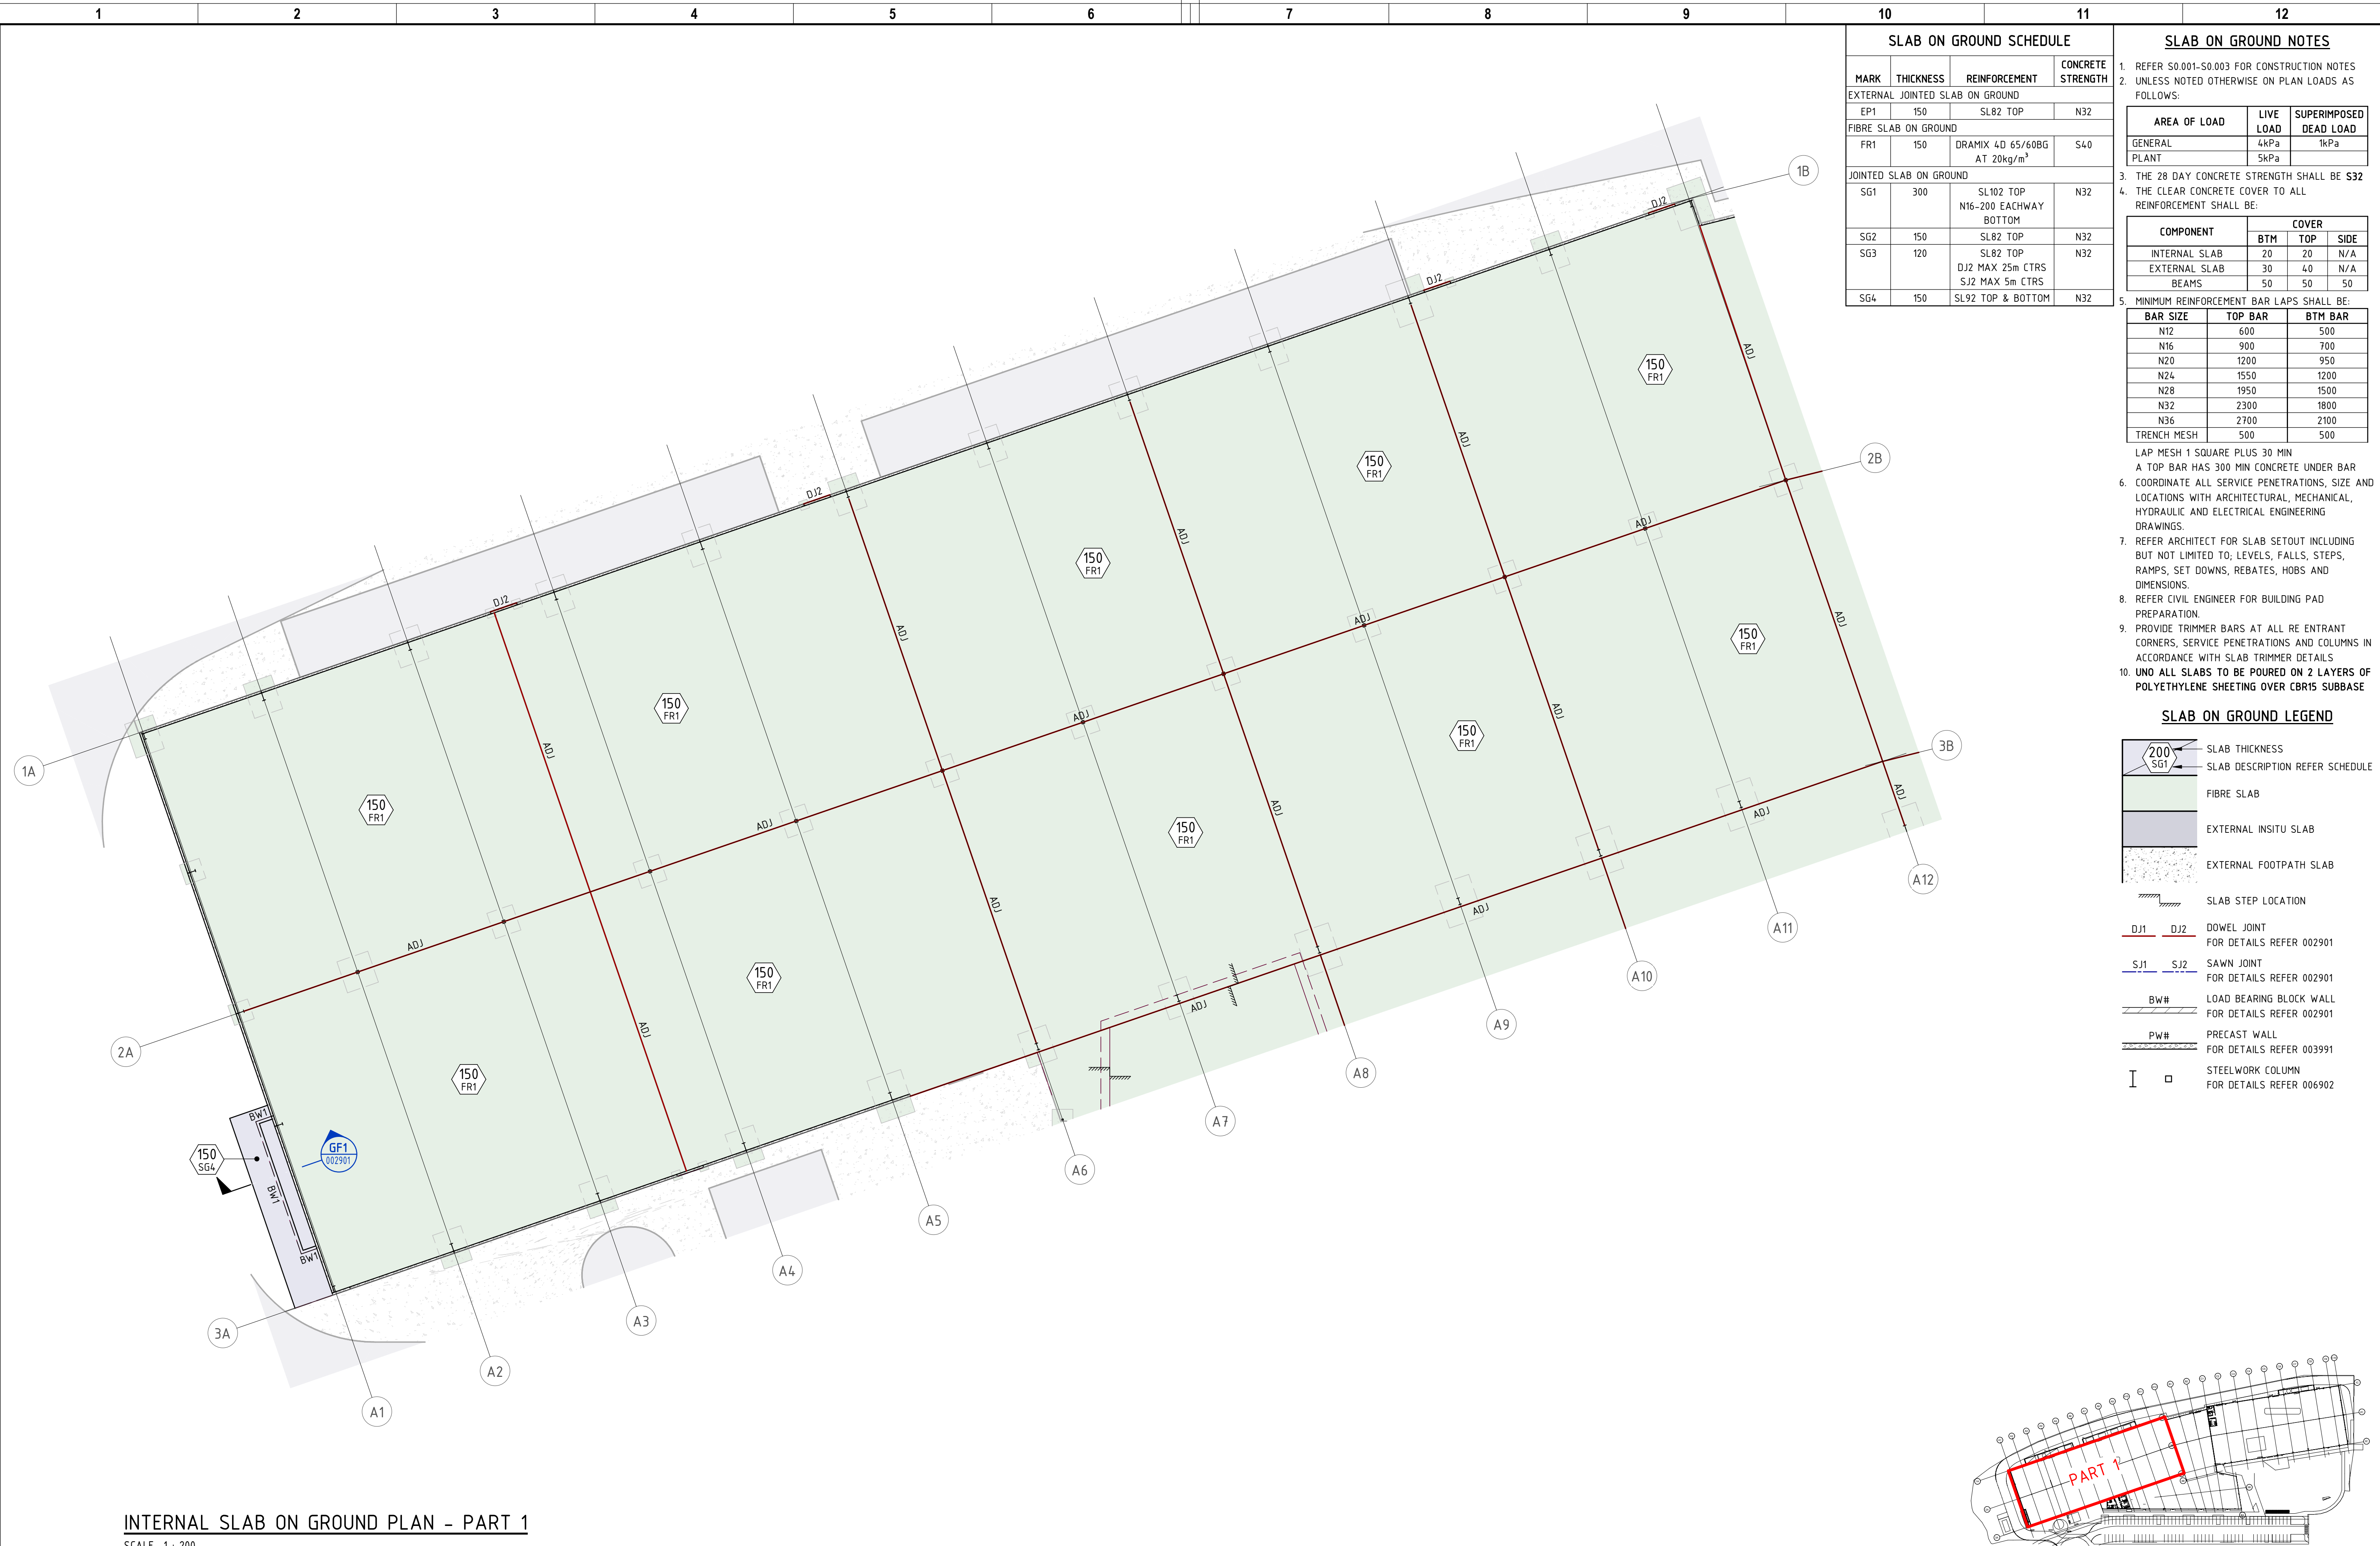

SLAB ON GROUND SCHEDULE			
MARK	THICKNESS	REINFORCEMENT	CONCRETE STRENGTH
EXTERNAL JOINTED SLAB ON GROUND			
EP1	150	SL82 TOP	N32
FIBRE SLAB ON GROUND			
FR1	150	DRAMIX 4D 65/60BG AT 20kg/m³	S40
JOINTED SLAB ON GROUND			
SG1	300	SL102 TOP N16-200 EACHWAY BOTTOM	N32
SG2	150	SL82 TOP	N32
SG3	120	SL82 TOP DJ2 MAX 25m CTRS SJ2 MAX 5m CTRS	N32
SG4	150	SL92 TOP & BOTTOM	N32

- SLAB ON GROUND NOTES**
 - REFER S0.001-S0.003 FOR CONSTRUCTION NOTES
 - UNLESS NOTED OTHERWISE ON PLAN LOADS AS FOLLOWS:

AREA OF LOAD	LIVE LOAD	SUPERIMPOSED DEAD LOAD
GENERAL	4kPa	1kPa
PLANT	5kPa	
 - THE 28 DAY CONCRETE STRENGTH SHALL BE S32
 - THE CLEAR CONCRETE COVER TO ALL REINFORCEMENT SHALL BE:

COMPONENT	COVER		
	BTM	TOP	SIDE
INTERNAL SLAB	20	20	N/A
EXTERNAL SLAB	30	40	N/A
BEAMS	50	50	50
 - MINIMUM REINFORCEMENT BAR LAPS SHALL BE:

BAR SIZE	TOP BAR	BTM BAR
N12	600	500
N16	900	700
N20	1200	950
N24	1550	1200
N28	1950	1500
N32	2300	1800
N36	2700	2100
TRENCH MESH	500	500

LAP MESH 1 SQUARE PLUS 30 MIN
A TOP BAR HAS 300 MIN CONCRETE UNDER BAR
 - COORDINATE ALL SERVICE PENETRATIONS, SIZE AND LOCATIONS WITH ARCHITECTURAL, MECHANICAL, HYDRAULIC AND ELECTRICAL ENGINEERING DRAWINGS.
 - REFER ARCHITECT FOR SLAB SETOUT INCLUDING BUT NOT LIMITED TO: LEVELS, FALLS, STEPS, RAMPS, SET DOWNS, REBATES, HOBS AND DIMENSIONS.
 - REFER CIVIL ENGINEER FOR BUILDING PAD PREPARATION.
 - PROVIDE TRIMMER BARS AT ALL RE ENTRANT CORNERS, SERVICE PENETRATIONS AND COLUMNS IN ACCORDANCE WITH SLAB TRIMMER DETAILS
 - UNO ALL SLABS TO BE POURED ON 2 LAYERS OF POLYETHYLENE SHEETING OVER CBR15 SUBBASE

- SLAB ON GROUND LEGEND**

200

SG1

SLAB THICKNESS

SLAB DESCRIPTION REFER SCHEDULE

FIBRE SLAB

EXTERNAL INSITU SLAB

EXTERNAL FOOTPATH SLAB

SLAB STEP LOCATION

DJ1 DJ2 DOWEL JOINT
FOR DETAILS REFER 002901

SJ1 SJ2 SAWN JOINT
FOR DETAILS REFER 002901

BW# LOAD BEARING BLOCK WALL
FOR DETAILS REFER 002901

PW# PRECAST WALL
FOR DETAILS REFER 003991

I □ STEELWORK COLUMN
FOR DETAILS REFER 006902

INTERNAL SLAB ON GROUND PLAN - PART 1
SCALE 1 : 200

