

SKYGATE PLAY – Brisbane Airport

**PRINCIPAL'S PROJECT
REQUIREMENTS –
REVISION 1 11/02/2026**

Contents

1.	INTRODUCTION.....	5
1.1.	Definitions	5
1.2.	Purpose & Project Background	5
1.3.	Separable Portions.....	6
1.4.	BAC's Objectives.....	6
1.5.	Principal's Project Requirement – Documents	6
1.6.	Agreement for Lease.....	7
1.7.	Site Conditions & Dilapidation	7
1.8.	Contractor to Inform Themselves	7
2.	APPROVALS, DESIGN AND CONSULTANT SUMMARY.....	8
2.1.	Approvals	8
2.2.	Airport Lessee Company Consent Application (ALCC) and Building Approval	9
2.3.	BAC Specification & Guidelines	9
2.4.	Height Limitations.....	10
2.5.	General Design	10
2.5.1.	General Design Deliverables	11
2.5.2.	Design Stages	11
2.5.3.	Detailed Design	11
2.5.4.	Construction Documentation Stage	12
2.5.5.	Design to Optimum Value	13
2.5.6.	Value Engineering	13
2.6.	Consultant Team.....	14
2.7.	Safety in Design & Design for Maintenance	14
2.8.	BAC Stakeholders	15
2.9.	Architectural	16
2.10.	Civil	16
2.11.	Structural.....	17
2.12.	Geotechnical and Environmental	17
2.13.	Services – General.....	17
2.13.1.	Mechanical	17
2.13.2.	Electrical / Communications / Data / Security	18
2.13.3.	Dry Fire / Fire Sprinklers	18
2.13.4.	Hydraulics	18
2.14.	BAC ICT – General	19
2.15.	BCA & Access Compliance	19
2.16.	Fire Engineering	19
2.17.	Acoustics.....	19
2.18.	Section J Compliance.....	20

2.19.	BAC's Sustainable Initiatives	20
2.19.1.	Guideline (ESD Criteria)	20
2.20.	Traffic Study and Analysis	21
2.21.	Landscaping – Selected Subcontractor Work	21
2.21.1.	Landscaping Provisional Sum (excluding Activation Area)	22
2.21.2.	Activation Area Provisional Sum	22
2.22.	Samples & Prototypes	23
2.23.	Alternative Products	23
3.	GENERAL PROJECT REQUIREMENT & SPECIFICATIONS	24
3.1.	Imported Fill & Excess Material	24
3.2.	Tenancy Master Keying.....	24
3.3.	Ceilings and Glazing	25
3.3.1.	Window Furnishings	25
3.3.2.	Ceilings	25
3.4.	Steelwork and Metalwork	25
3.4.1.	General	25
3.4.2.	Bollards	25
3.4.3.	Fencing, Gates and Screening	25
3.5.	Signage	26
3.5.1.	General	26
3.5.2.	BAC Main Sign	26
3.5.3.	Tenancy Signage Provision	26
3.6.	Painting and Line Marking	26
3.6.1.	General	26
3.6.2.	Line Marking	26
3.7.	Services	26
3.7.1.	Building Management System	26
3.7.2.	Mechanical Services	27
3.7.3.	Electrical Services	28
3.7.4.	Metering and BAC Smart Metering	29
3.7.5.	BAC ICT (Communications, IT and Data Security)	30
3.7.6.	Pad Mount Transformer and Substation	31
3.7.7.	Hydraulic Services	31
3.7.8.	Fire Services	32
3.7.9.	Lift Services	32
3.7.10.	Solar	33
3.8.	External Works	33
3.8.1.	General	33
3.8.2.	Wheel stops	33

3.8.3.	Concrete	33
4.	BAC REQUIREMENTS	34
4.1.	Site Establishment & Car-Parking	34
4.1.1.	Fencing & Hoarding	34
4.1.2.	General	34
4.1.3.	Compound	34
4.1.4.	Parking	34
4.2.	Environmental Management	34
4.3.	Project Electronic Communication	35
4.4.	Site Meeting Room	35
4.5.	Meetings and Reporting	35
4.5.1.	Monthly Reporting	35
4.5.2.	Weekly Reporting	36
4.6.	PCG Meetings	36
4.7.	Design Meetings	36
4.8.	Site Meetings	37
4.9.	Programme	37
4.10.	Quality Assurance	38
4.11.	Site Camera(s)	38
4.12.	Other Contractor's	38
4.13.	Tenant Early Access	39
4.14.	Completion	39
4.15.	Utilities and Connections	39
4.16.	BAC Asset Management System (Maximo)	39
4.17.	Document Submissions	40
4.18.	Defects and Maintenance Period	41
4.18.1.	Defects	41
4.18.2.	Maintenance	41
4.19.	As-Built Surveys & As-Built Drawings	42
4.20.	Operation and Maintenance Manuals	43
4.21.	Digital Engineering Deliverables	44
4.22.	Keys and Spares	46
4.22.1.	Spares	46
4.22.2.	Keys	46
4.23.	Warranties and Guarantees	47
	ANNEXURE A – PRINCIPAL'S PROJECT REQUIREMENTS – DOCUMENTS	49
	ANNEXURE B – PRELIMINARY DESIGN DOCUMENTS	50
	ANNEXURE C – INFORMATIVE DOCUMENTS	51
	ANNEXURE D – SEPERABLE PORTIONS	52

Table 1 Minimum General Deliverables.....	11
Table 2 Minimum Architectural Deliverables	16
Table 3 Minimum Civil Deliverables.....	16
Table 4 Minimum Structural Deliverables	17
Table 5 Minimum Services Deliverables.....	18
Table 6 Minimum ICT Deliverables.....	19
Table 7 Minimum Landscape Deliverables.....	21
Table 8 Table of Warranties	47

1. INTRODUCTION

1.1. Definitions

All terms which have a defined meaning in the General Conditions of Contract have the same meaning in this Principal's Project Requirements unless the context otherwise requires.

'PPR' in this document means Principal's Project Requirements.

Principal, BNE Property, BAC and Brisbane Airport Corporation have the same meaning.

Principal's Representative and Superintendent have the same meaning.

Contractor and Builder have the same meaning.

Agreement for Lease, Agreement to Lease, AFL and ATL have the same meaning.

'ALC' in this document means Airport Lessee Company

'ALCC' in this document means Airport Lessee Company Consent

'ABC' in this document means Airport Building Controller

1.2. Purpose & Project Background

This document must be read in conjunction with the specific requirements of the BAC Major Works Head Contract (D&C), Agreement to Lease, Tenancy Building Brief/s, and along with the appropriate and relevant Brisbane Airport Corporation (BAC) guidelines, technical specifications and requirements.

Specifications nominated within this document must be read in conjunction with the architectural plans included in Annexure A of this document

The Project consists of, and is briefly described as follows:

- a. Construction of a warehouse space with dual tenancy to accommodate two tenants, Area 51 and Game Over.
- b. External works including landscaping, signage, paving furniture and roadways.
- c. Infrastructure including Transformer, Fire booster assembly and services connections.

BAC Project Specific Details:

- a. Street Address – SKG26 The Circuit, Brisbane Airport, QLD, 4008
- b. BAC Building Ref Number:
 - I. Game Over - **345**
 - II. Remainder of SKG26- **346**
- c. BAC Project Number – 25021
 - I. BAC Site Ref – SKG26

BAC's plans and specifications may be subject to change during the detailed design development and construction drawing stages.

1.3. Separable Portions

Date for Practical Completion SP1: 30 April 2027

Date for Practical Completion SP2: 15 June 2027

The Contractor must provide:

- a. 21,982 m2 site area (Total)
- b. Area 51 – Warehouse 7,115 m2 GFA
- c. Game Over – Warehouse 3,600m2 GFA
- d. Amenities 200 m2
- e. 90 at grade car bays contained within the site.

1.4. BAC's Objectives

BAC is committed to making the Brisbane Airport precinct a prosperous centre for industry and business while maintaining the highest environmental standards, including:

- a. establishing and cultivating a relationship with non-aviation related industry;
- b. expanding BAC's retail property portfolio; and
- c. generating a new source of long-term lease revenue for BAC.

BAC's primary objectives in relation to this project are:

- d. the design and construction of a purpose built facility that is fit for the intended purposes
- e. a stakeholder management process which is completed throughout the design evolution of the project in order that by the time of IFC documentation submission to ALCC and ABC, all corresponding BAC and tenant stakeholder endorsement has already been sought and received in writing so not to delay formal approvals.
- f. completion of the Project on time pursuant to the Contract
- g. the execution of the WUC safely
- h. a clean and tidy Site maintained in accordance with best practice
- i. the prevention of environmental harm caused by and during the carrying out of the Works Under Contract WUC
- j. good quality workmanship achieving greater than the minimum standards specified in the Contract
- k. implementing regular inspections of the WUC and regularly undertaking any rectification work so that at Practical Completion defects in the WUC are minimised.
- l. Undertake the works to limit disruption to the Tenant's operations as much as possible.

1.5. Principal's Project Requirement – Documents

Excepting for the following departures the Contractor must not depart (without written approval of the Principal's Representative) from the design, layouts, details, specifications, finishes or standards contained within, or inferred from, the documents listed in Annexure A hereto.

Departures from the documents listed in Annexure A hereto is permissible only if necessary, in order to comply with Development and Authority Approval conditions, Legislative requirements, including but not limited to, NCC and the Queensland Development Code.

The documents in Annexure B represent the preliminary design of the Works. The Contractor is responsible for the development, coordination and adequacy of the preliminary designs. No warranty is given by the Principal's Project Requirements

Principal in relation to the accuracy, fitness or adequacy of the preliminary design documents listed in Annexure B hereto.

The documents that informed the preliminary design are listed in Annexure C hereto. These are referral documents issued for information purposes only and are not warranted and cannot be relied upon as being complete, accurate or adequate for the purpose of executing the work under the Contract.

Any discrepancies between documents are to be raised by the Contractor directly to the Principal's Representative, who will provide instruction. The Contractor is deemed to have allowed for the more stringent and higher-specified obligation.

1.6. Agreement for Lease

The Contractor acknowledges that the Principal or a related entity of the Principal has entered into separate Agreement for Lease(s).

It is of fundamental importance to the Principal that the Contractor designs and constructs the Project in a manner that does not place the Principal in breach of the Agreement for Lease(s). The Contractor is to ensure all Works, management, administration, and communication undertaken is in accordance with the Principal's obligations under the Agreement for Lease(s). For clarity, the Contractor takes on all the Principal's obligations under the Agreement for Lease(s) during the construction period (WUC).

The Principal may enter into an Agreement for Lease during the project. The Principal may communicate any updates to the Contractor where necessary, which may require alterations to the Principal's Project Requirements. Any changes will be accommodated by the Contractor and actioned under the conditions of the Contract.

Refer to **Annexure A** for redacted Agreement for Lease(s) and Head of Agreement (HoA).

1.7. Site Conditions & Dilapidation

Contractors must, before submitting a tender response, fully inform themselves of the nature of the Works by personal examination of the site, drawings, specifications, and by any other such means as they may consider necessary as to matters, conditions and construction bearing on or in any way affecting their responses and the ensuing Contract.

Any unforeseen difficulties for which provision is not made in the Request for Tender (RFT) will in no way relieve the tenderer for their responsibility to deliver the works in accordance with the conditions of the Contract.

Contractors will acknowledge, as part of their response that they have visited the site and have undertaken all investigation and precautions to include for all works necessary to complete the work under the Contract described in the RFT.

The Contractor will undertake a Dilapidation Report prior to commencement of works on site and another on completion as a condition precedence to Practical Completion.

1.8. Contractor to Inform Themselves

The Contractor is required to and is deemed to have;

- a. Examined all documents referred to in the Tender, the site and its surroundings, and any other information made available in writing by the Principal, or any other person on the Principals behalf to the Contractor for the purpose of tendering;
- b. Examined all information relevant to the risk, contingencies and other circumstances having an effect on their Tender and which is obtainable by the making of reasonable enquiries;

- c. Ascertained the availability of materials for the work under the Contract and to have made due allowance in its Tender for obtaining all material required to comply with its obligations to bring the Works to Practical Completion.
- d. Satisfied itself as to the correctness and sufficiency of its Tender and that its price covers the costs of complying with all obligations for working at Brisbane Airport and the Contract and of all matters and things necessary for the due and proper performance and completion of the Works;
- e. Informed itself of all matters relevant to the employment of labour at the site and all industrial matters relevant to the site and the work under Contract;
- f. Examined the site to confirm and allow for the connection of power (temporary and permanent) and communications to the designated BAC substation, sewer (temporary and permanent connections) to the nearest main (or pump station), storm water, recycled water and potable water to the nearest main; and
- g. Understood if there are any close proximity High Voltage Energex lines and/or and Shell Jet Fuel Lines (JUHI) and/or Urban Utilities assets which will require notification to the relevant authority, subsequent authority applications and approvals, design coordination and construction works that may be required.
- h. Informed itself of the existing buildings uses and the constraints applicable to working within, around and adjacent to the Tenant's operation.
- i. Accepted *Section 4.23* and the associated warranty table by virtue of submitting its tender.

2. APPROVALS, DESIGN AND CONSULTANT SUMMARY

2.1. Approvals

The Contractor must obtain and comply with the following documentation:

- a. BAC Stakeholder review, comment and closure at each corresponding design stage and as required throughout construction
- b. BAC Lessee consent (ALCC)
- c. BCC hydraulic approval
- d. ARFF Approval (Aviation Rescue Fire Fighting)
- e. Traffic Management Plans and Approval (including BCC Approval / Consent)
- f. Staged Building Approvals (Airport Building Controller - ABC)
- g. CEMP Approval (Construction Environmental Management Plan)
- h. BAC Approved Contractor (BAC process online - Beakon System)
- i. BAC Works Approval (BAC process online - Beakon System)
- j. BAC Notice of Risk Activity (BAC process online - Beakon System)
- k. All required Authority approvals to carry out the WUC.
- l. All relevant management plan approvals such as Integrated Management Plan, OH&S, permit to dig, environmental plans etc. as required
- m. Certification of Classification on completion of the works

The Contractor is responsible for the communication, management, meetings, cost and lead times associated with all airport authorities, approvals and stakeholders.

The Contractor shall arrange for and pay Portable Long Service Leave (PLSL) fees, (i.e. Q Leave Levy) and provide a copy of the payment receipt to the Principal's Representative. The payment of the Q Leave levy is

required by the Contractor prior to the release of the first stage building approval by the Airport Building Controller.

Contractor to display the Building Occupancy Certificate provided by the ABC, at the designated entry point of the building. Display to be framed in a wall mounted presentation display frame system.

2.2. Airport Lessee Company Consent Application (ALCC) and Building Approval

The Contractor must as a minimum comply in full with the requirements of AAG-003 – ALCC Applications, ADG-003 – ALCC Design Requirements and ACG-003 – ALCC Approvals Procedure.

This should include but not be limited to:

- a. Prepare and lodge an ALCC application to the Airport Approvals Manager
- b. Attend a pre-lodgement meeting with the Airport Approvals Manager
- c. Comply with all conditions of the approval

It is an essential requirement of this PPR that the Contractor designs and constructs the Project in compliance with the ALCC Approval and corresponding stakeholder management process.

Following receipt of the ALCC (Statement of Consistency), the Contractor is to prepare and lodge the relevant and applicable documentation required for obtaining Building Approval through the Airport Building Controller (ABC).

The Contractor must:

- a. Ensure that the submission is a “full and proper submission”, in accordance with the Regulatory requirements.
- b. Ensure that all corresponding review and approval timelines are understood to not impact project programme.
- c. Promptly respond to any correspondence from the ABC, including Request for Information (RFI), Request for Clarification and the like.
- d. The Contractor is to provide the Principal's Representative with a PDF copy of all correspondence (including drawings and communication) to and from the ABC (on the ABCO website) no later than the next business day.

Prior to submission of approvals documentation, the Contractor must ensure that all necessary BAC stakeholder meetings and documentation reviews have been completed. It is highly recommended that this process is completed collaboratively throughout the design phases of the project by raising corresponding RFI's, requests for departures, design presentations and design review processes.

2.3. BAC Specification & Guidelines

BAC has a suite of Airport Guidelines and Standards (including Technical Notes and procedures) documenting the BAC mandatory minimum requirements to assist designers, contractors and other specialists involved in preparing design documentation and delivering construction projects for works on Brisbane Airport.

The purpose of the Airport Guidelines, Standards, Procedures etc is to consolidate, update, expand on and control BAC's mandatory minimum requirements to enable construction projects to:

- a. Develop designs based on specific BAC requirements and document designs to an acceptable level.
- b. Ensure consistency of standards and design application across the business
- c. To drive better quality outcomes for designers and BAC
- d. Advise on requirements such as BAC Approvals, Drug and Alcohol Policies and OH&S requirements
- e. BAC Environmental requirements

The use of the Airport Guidelines and Standards is mandatory for all works on Brisbane Airport. The airport environment necessitates special attention to particular design, maintenance and construction issues that are unique to the airport. These guidelines and standards can be found on the Working at Brisbane Airport webpage: <https://www.bne.com.au/corporate/work-at-bne>.

The requirements in these Airport Guidelines do not restrict the designers' prerogative to recommend alternate designs to address site specific situations. A designer can propose a design that is not consistent with the contents of the Standards, however these instances must be approved by the BAC Sponsor in writing, and requires endorsement from the relevant BAC Subject Matter Expert (SME) via the due process. All proposed departures from Airport Standards, Guidelines and Technical Notes shall be presented in a master project Deviation Register to be coordinated by the Contractor and corresponding design team.

The Contractor takes responsibility for retrieving all required BAC Guidelines, available via [Home | BNE Community](#) under the Resources Tab > Developments > Airport Guidelines.

2.4. Height Limitations

The Airport precinct has height limitations specific to each site which the Contractor must comply with. Any encroachment (e.g. by a crane) will require BAC prior approval. Prior to encroaching into restricted airspace, the Contractor must apply to BAC. Approval is subject to Air Services Australia and Civil Aviation Safety Authority (CASA) consent.

Generally, the site is subject to a maximum height of **48.50m AHD**. Please consult OLS information to confirm this along with all corresponding BAC standards and guideline requirements.

2.5. General Design

This section outlines the generic approach to designing at BAC and needs to be read in conjunction with all relevant project documentation and the Contract to ensure the specifics of the project is fully understood.

All documentation submissions for review are to be submitted in a logical format and broken into the relevant sections and disciplines. The submission must be accompanied by a checklist of the items for review in excel format including and reference to proposed departures from the contract documentation (provide separate schedule as referenced elsewhere in this document). The Contractor is to generate project design, departures and risks tracking registers to the approval of the Principal's Representative.

Any areas where an alternative is proposed or difference/ambiguity, the finish/quality must be equal or better than and provided to BAC for approval. Each submission must benchmark the quality parameters directly against each other for ease of understanding and approval/rejection.

The Contractor shall engage all consultants and provide all reports, necessary to obtain BAC Stakeholder and Authority approvals and compliance.

The Contractor is to provide the principal with a copy of their register, and regular updates, to demonstrate compliance.

The Contractor is to provide a copy of all final Shop Drawings approved by their consultants. Progressive Shop Drawings will be provided to the Principal's Representative where necessary for BAC review prior to commencement of the specific works.

The Contractor's design is to comply with FM Global requirements. The exact compliance parameters of FM Global and any corresponding National Fire Protection Association (NFPA) requirements are to be coordinated and agreed with BAC during the design process.

The design will be reviewed by FM Global (via BAC), and outcomes of this review will be provided to the Contractor for review and compliance. It is worth emphasising that FM Global requirements are often more onerous than those requirements indicated in the Australian Standards and that all design work and subsequent shop drawings, and installation shall demonstrate full compliance to all FM Global requirements where required for this project.

Exemplar FM Global items which may be required by the project could be as follows:

- a. FM Global - Roof – Wind Loads
- b. FM Global – Roller Doors
- c. FM Global – Fire Services

Note that consultation with other regulatory bodies may also be required, including CASA (e.g. plume assessments) and Air Services Australia (sight lines etc). The Contractor is to proactively understand these requirements (if any) and obtain all of these approvals during the design period.

2.5.1. **General Design Deliverables**

Table 1 Minimum General Deliverables

Design Stage	Description
Detailed Design	General detailed design deliverables include: • finalised Basis of Design (BoD) report • finalised Safety in Design Report/Register • Final drawings, schedules, scope of works, and specifications - for all disciplines • Finalised Sustainability Report (i.e., this forms part of the Basis of Design Report) • Departures Register • Project Risk Register
Construction Documentation Stage (100% of Design Stages)	General Documentation Stage deliverables include: • Signed Design Guidelines List ◦ including design related Operation Readiness and Airport Transfer (ORAT) requirements having been met • Signed Design Certificates • 100% complete design submission – drawings, schedules, scope of works, specifications (Issued for Building Approval, ready to be issued for construction IFC after approval).

2.5.2. **Design Stages**

The Consultant shall develop and progress design activities and deliverables to be aligned with the following standard BAC project stages:

- a. Detailed Design Stage
- b. Construction Documentation Stage (IFC suitable for ALCC submission)

Unless noted otherwise in the Contract, if design stages are combined then the minimum requirements of all combined stages must be completed during the combined design stage.

2.5.3. **Detailed Design**

The purpose of Detailed Design is to:

- a. Develop the approved Tender Design such that the scope and quality requirements of all major elements are clearly defined and coordinated
- b. Complete stakeholder requirement elicitation with all design requirements (including subsystems) now captured and compiled allowing completion of the design (during Detailed Design) without further stakeholder interactions
- c. It is noted that the BAC Stakeholder and SME teams must be consulted to confirm the deliverables and to approve any systems that are not on the BAC standard approved systems list and/or do not meet specific project parameters before proceeding to the next stage. These must be fully disclosed and included in a project master departures register.

- d. Enable a level of cost estimate accuracy equal to or greater than -5% to +15% (the design documentation shall be sufficiently developed to allow this)
- e. Identify all requisite authority approvals, including but not limited to Energex, UU, BCC, ARFF.
- f. Produce all design documentation required to complete the Detailed Design Stage (e.g., drawing types and specifications identified here or in the Scope of Services (SoS)).
- g. Support BAC in developing the construction packaging strategy, staging, program, and the tender packages to achieve best value for BAC in the procurement of consultant/s, subcontractors, plant, materials and/or supply contracts for the Works.
- h. Identify and propose Early Works packages that are recommended to be tendered early to de-risk the Project and reduce overall construction cost. These must also be coordinated with the ALCC and corresponding BA approvals.

For detailed design, the following aspects shall be completed and/or resolved:

- a. All preceding design stage requirements.
- b. The final Basis of Design (BOD) completed for each discipline of the Works including any required functional description to articulate how systems will operate.
- c. Scope of all elements to be clearly defined.
- d. Design documentation produced the requirements of corresponding BAC Digital Engineering requirements.
- e. Develop specifications to include all equipment specifications, performance criteria and project specific content. Project specific specifications are required.
- f. Aesthetics, functionality, operation and performance of the systems and subsystems are clearly defined and presented.

While resolution of individual details that do not impact on the key elements are left for the Documentation stage, the documents are to be advanced to a level where all ambiguity is removed from the documents and are submitted for stage approval by BAC Stakeholder through a formal review process. All design decisions must be resolved at this stage.

2.5.4. Construction Documentation Stage

The purpose of Construction Documentation Design is to:

- a. Achieve a level of detail sufficient to allow reissue, without further development, as "Issued For Construction" (IFC) upon acceptance of the Detailed Design by BAC.
- b. Complete 100% of the total design effort, therefore allowing the shop drawing process to begin.
- c. Enable a level of cost estimate accuracy equal to or greater than - 3% to +5% (the design documentation shall be sufficiently developed to allow this).

The documents produced in Documentation Stage shall, with only minor amendment or clarification, be able to be:

- a. Submitted and achieve ABC approval and therefore should be able to be reasonably constructed.
- b. Constructed from efficiently and effectively, including the production of workshop drawings, without further information being supplied through RFI or Site Instructions except when dealing with unexpected site conditions

For Construction Documentation, the following aspects shall be completed and/or resolved:

- a. All preceding design stage requirements.
- b. Quantity and quality of all building elements, materials and systems defined through drawings.
- c. Specifications and schedules shall all be completed.
- d. The design shall be comprehensively co-ordinated with all other disciplines.

The completion of Construction Documentation requires:

Approval from the BAC Design Approvals Team and all corresponding stakeholders (which should have largely been completed through previous stage stakeholder engagement and reviews), including the BAC Design and Delivery team SMEs, is required in writing before proceeding to the next stage.

Completion of the Construction Documentation Stage resolves the Design Stages and allows progression to obtaining ABC endorsement and corresponding Building Approvals such that construction can commence.

2.5.5. Design to Optimum Value

The design teams design of the system, and/or subsystems, they are responsible for designing will directly impact the cost to construct, operate and maintain, and eventually decommission the system and/or subsystems.

The Consultant shall, to BAC's satisfaction:

- a. Drive a "design to optimum value" agenda that considers the whole life cycle of the system, involves innovative thinking, and achieves BAC's budget
- b. Demonstrate that the proposed design solution is consistent with global or industry benchmarks and represents good value for money for BAC
- c. Apply value engineering to all subsystems in accordance with 2.5.6 Value Engineering
- d. Deliver value management services in accordance with 2.5.6 Value Engineering

2.5.6. Value Engineering

The design team shall proactively apply Value Engineering (VE) techniques to support the design to optimise value. This shall include both proactive VE (identifying potential opportunities and scheduling VE events) and reactive VE (addressing cost issues and seeking alternatives to reduce cost).

The design team shall, to BAC's satisfaction, actively involve BAC and the Project Cost Planner in all VE events to obtain proactive cost input. VE activities shall be completed to the satisfaction of BAC and shall include, but not limited to:

- a. Identifying, evaluating, and selecting the best value option for each key component of the preferred solution.
- b. Such analysis must be presented within a project design report for each key component, including description of the alternatives considered
- c. Incorporate balancing initial capital cost with life-cycle costs including energy consumption, operating cost, maintenance cost and asset repair and replacement requirements into VE decision making criteria, applied at the facility and component design level
- d. Making recommendations to preferred options at component level that clearly demonstrates best value options have been selected for each component

- e. Facilitating workshops with BAC that breakdown solutions and challenge key components against established value criteria to bring ideas, innovative thinking, and constructive challenge at the component level
- f. Preparing a list of possible VE items, discuss these with BAC (including corresponding SME's and stakeholders) and the Project Cost Planner to agree on which concepts or solutions shall receive more detailed analysis
- g. Reporting on all VE activity within each Design Stage Design Report

2.6. Consultant Team

All Consultants works are to be designed and constructed in accordance with the Principal's Project Requirements and corresponding BAC Standards and Guidelines.

Other than the Architect, who will be novated, the Contractor is at liberty to engage their own consultant team, however BAC recommend the engagement of the consultants listed below due to their past involvement in this project:

- a. Structural Engineer- Northrop
- b. Civil Engineer- Northrop
- c. Services Engineer (Electrical, Mechanical, Hydraulic, Sprinkler and Energy Efficiency Engineering - Ashburner Francis
- d. Fire Engineer- OMNII
- e. Acoustic Consultant - Renzo Tonin
- f. Building Code Consultant - Knisco Development Solutions
- g. DDA and Access Consultant – Knisco Inclusive Access
- h. Traffic Consultant- PSA
- i. Quantity Surveyor- GRC
- j. Geotechnical Engineer- Douglas Partners
- k. Environmental Consultant- PSK Environmental

Where the Contractor seeks to engage a consultant, the Contractor shall obtain the Principal's Representatives prior written approval (which shall not be unreasonably withheld).

2.7. Safety in Design & Design for Maintenance

The Contractor shall comply with the requirements on Safety in Design in accordance with the relevant legislation.

The Contractor shall, to BAC's satisfaction:

- a. Appoint a suitably qualified Safety in Design (SiD) management professional(s) to lead and co-ordinate the SiD activities
- b. Integrate the SiD activities with the design activities, such that required actions and design modifications are addressed expeditiously
- c. Meet the objectives of the SiD process, ensuring that a safe design is endorsed by all parties and that a record of all resultant hazards or all vital safety and health information has been recorded and reviewed for action
- d. Ensure that a rigorous process, led by the SiD professional, shall be followed throughout all stages of their design that is capable of identifying all foreseeable safety risks and hazards

- e. Inform themselves as to the types of activities and tasks likely or intended to be carried out in the structure, including the tasks of those who maintain, repair, service or clean the structure as an integral part of its use to assist in identifying all foreseeable safety risks and hazards
- f. Support BAC in the presentation of SiD information, as requested by BAC
- g. Demonstrate to BAC that SiD is being successfully managed and that the risk profile is being reduced over time

Develop and maintain a single SiD Register for the entire project (individual registers will not be accepted). The document shall include:

- a. All hazards identified throughout the lifecycle of the project with consideration to hazards and risks. Note that the BAC Safety in Design/WHS Risk Register can be used as a template if required.
- b. All design modifications made, control measures taken, and other measures taken to mitigate the risks and hazards throughout the lifecycle of the project and reasoning why decisions are made regarding a specific option for hazard management where there are multiple options
- c. Any residual hazards not addressed during the design and still require mitigation
- d. Relevant safety and health information that the construction contractor(s) and all stakeholders shall be aware of
- e. The recording of the risks shall include proposed mitigations within the design to reduce and/or eliminate these risks;
- f. The register shall include appropriate action dates for eliminating risks and hazards or putting in place control measures
- g. Construction method advisory notes by the Consultant to ensure the construction contractor(s) are aware of residual risks that need to be addressed or managed
- h. Maintenance methods advisory notes by the Consultant to ensure BAC is aware of residual risks that need to be addressed or managed
- i. Safe operating procedure notes for use and maintenance of equipment

2.8. BAC Stakeholders

The Contractor shall participate in stakeholder engagement meetings with all necessary internal divisions of Brisbane Airport Corporation at the following stages:

- a. Design Development and Documentation
- b. Construction Documentation
- c. Stakeholder Inspection Register
- d. Testing & Commissioning

The Contractor shall arrange all stakeholder meetings, provide agenda, arrange for required Consultant attendance and take minutes (including design/documentation) and actions from each meeting.

The Contractor is to liaise with BAC authorities/stakeholders to establish the necessary details and hold points associated with the works to allow for the inspection and sign off prior to covering up. The Contractor is to review and prioritise Design for Maintenance access provisions with the BAC stakeholders and seek acceptance prior to carrying out works on site.

The Contractor is to arrange and hold witness testing of all plant and equipment, with the relevant BAC Facilities Representative / Stakeholders and Design Engineers. All notes, test sheets, reports etc. are to be provided to the Principals Representative and included in the O&M Manuals.

As a condition precedent to Practical Completion, the Contractor must arrange witness testing during commissioning with the BAC Stakeholders and Peer Reviewer and obtain approval that the building is functioning as required.

2.9. Architectural

Archipelago has undertaken the preliminary building design that is included in this PPR. **Archipelago** must be engaged by the Contractor to undertake the architectural design as per their consultant agreement scope and deed of novation.

Table 2 Minimum Architectural Deliverables

Design Stage	Description
Detailed Design	The Consultant shall develop the approved tender design into precise drawings and specifications at a level of detail suitable to progress to contract documentation. Typically, the architectural detailed design deliverables include: • completed detailed design documentation, based on all design decisions having been made, • Final list of drawings, schedules, scope of works, and specifications, • Final architectural drawings (e.g., buildings, roads, structures, services, floor plans, finishes, sections, elevations, dimensioned drawings, fixtures etc)
Documentation (100% - IFC)	The Consultant shall finalise the documentation (based on BAC feedback/comments) into the Issued for Construction set which will be used to construct the Works. At a minimum, the architectural documentation deliverables are to be in accordance with the general deliverables.

2.10. Civil

Table 3 Minimum Civil Deliverables

Design Stage	Description
Detailed Design	The Consultant shall further develop the tender design into precise drawings and specifications at a level of detail such that no further design work is necessary, suitable for design approval from the principal to proceed to construction documentation stage. Typically, the Civil Detailed design deliverables (in addition to the general deliverables) include: • All design decisions made • Completed design submission covering all these decisions • Final list of drawings, schedules, scope of works, and specifications • Final civil drawings (e.g., lot layouts, contours/levels, road layouts and setout, cross sections, surcharging and bulk earthworks plans, drainage plans and sections etc) • Updated flood model and report with the development scenario • Coordinated underground services • Noise report • Updated Road Safety Audit (RSA) • Public Utility Plant (PUP) Report • Final SiD Register
Construction Documentation (100%)	The Consultant shall finalise the detailed design (based on BAC feedback/comments) into the Issued for Construction set which will be used to construct the Works. Typically, the civil detailed design deliverables are to be in accordance with the general deliverables.

2.11. Structural

Table 4 Minimum Structural Deliverables

Design Stage	Description
Detailed Design	The Consultant shall further develop the design into precise drawings and specifications at a level of detail suitable to progress to IFC documentation. Typically, the structural developed design deliverables include: • All design decisions made • Completed design submission covering all these decisions • Final list of drawings, schedules, scope of works, and specifications • Final structural drawings (e.g., foundations, structural elements, floor and roof plans, sections, elevations, dimensioned drawings, column schedules etc)
Construction Documentation (100%)	The Consultant shall finalise the developed design (based on BAC feedback/comments) into the Issued for Construction set which will be used by BAC to construct the Works. Typically, the structural detailed design deliverables are to be in accordance with the general deliverables.

2.12. Geotechnical and Environmental

Douglas Partners were engaged by the Principal to undertake preliminary geotechnical investigations. These investigations are included in the Annexures.

PSK Environmental were engaged by the Principal to undertake preliminary environmental site assessment investigations. These investigations are included in the Annexures.

The Contractor is required to undertake and provide any necessary management plans, water monitoring, and data logging as suggested in the investigations, and as required by BAC Environmental and ABC/AEO.

The Contractor is to ensure the new works have minimal disruption to existing adjoining owners/tenancies. The Contractors CEMP is to detail all measures to be employed and monitoring to be undertaken by the Contractor in order to minimise the impacts to the precinct resulting from noise, vibration, dust, odour and the like.

2.13. Services – General

In accordance with the individual Services D&C Performance Briefs / Specifications, the Contractor will be responsible to design, supply, install, construct, test, commission, service, warrant and maintain for a period of 12 months all Services installation, configured to suit the layout and the requirements of the project. The service must be a complete, compliant, operational, and engineered system.

The work of this section includes for all obvious and incidental work to complete each Service discipline in accordance with the relevant Australian Standards, Building Code of Australia / NCC and to the satisfaction of the Principal and all Authorities, whether expressly mentioned or not within this document.

2.13.1. Mechanical

The Contractor is to engage an engineer (acceptable to BAC) to produce the project specific D&C performance brief/specification and IFC drawings.

BAC may engage an engineer to undertake peer reviews of the detailed design or IFC documentation (submitted by the Contractor) and site inspections of the works to ensure compliance with the PPR.

2.13.2. **Electrical / Communications / Data / Security**

The Contractor is to engage an engineer (acceptable to BAC) to produce the project specific D&C performance brief/specification and IFC drawings.

BAC may engage an engineer to undertake peer reviews of the detailed design or IFC documentation (submitted by the Contractor) and site inspections of the works to ensure compliance with the PPR.

2.13.3. **Dry Fire / Fire Sprinklers**

The Contractor is to engage an engineer (acceptable to BAC) to produce the project specific D & C performance brief/specification and IFC drawings.

BAC may engage an engineer to undertake peer reviews of the detailed design or IFC documentation (submitted by the Contractor) and site inspections of the works to ensure compliance with the PPR.

2.13.4. **Hydraulics**

The Contractor is to engage an engineer (acceptable to BAC) to produce the project specific D & C performance brief/specification and IFC drawings.

BAC may engage an engineer to undertake peer reviews of the detailed design or IFC documentation (submitted by the Contractor) and site inspections of the works to ensure compliance with the PPR.

Table 5 Minimum Services Deliverables

Design Stage	Description
Detailed Design	The Consultant shall further develop the design into precise drawings and specifications at a level of detail suitable for all design considerations to be made, removal of risk, accurate project costing, enabling works packages to be created and instructed at this stage, ready for Principal approval before proceeding to the next stage. Typically, the services developed design deliverables include: • All design decisions made • Documentation to fully articulate and coordinate with the agreed design project staging. Full understanding of project delivery from commencement to end-state to be articulated in the documentation. • System functional descriptions and/or detailed system operations to be defined coordinate with Concepts of Operations (CONOPS) and obtain all Stakeholder endorsements, including transitional arrangements between existing and new systems where relevant. • Completion of the detailed design submission • Final list of drawings, schedules, scope of works, and specifications • Final services drawings.
Documentation (100%)	The Consultant shall finalise the developed design (based on BAC feedback/comments) into the Issued for Construction set which will be used by BAC to construct the Works and obtain final ABC approvals. Typically, the services detailed design deliverables are to be in accordance with the general deliverables.

2.14. BAC ICT – General

Table 6 Minimum ICT Deliverables

Design Stage	Description
Detailed Design	The Consultant shall further develop the design into precise drawings and specifications at a level of detail suitable to progress to IFC documentation. Typically, the ICT developed design deliverables (in addition to the general deliverables include: • All design decisions made • Complete design submission • Final list of drawings, schedules, scope of works, and specifications • Final ICT drawings It is noted that the BAC IT Project Manager must be consulted to confirm the deliverables and to approve any systems that are not on the BAC standard approved systems list before proceeding to the next stage.
Construction Documentation (100%)	The Consultant shall finalise the developed design (based on BAC feedback/comments) into the Issued for Construction set which will be used by BAC to construct the Works. Typically, the ICT detailed design deliverables are to be in accordance with the general deliverables.

2.15. BCA & Access Compliance

Knisco Development Solutions has produced an initial Building Compliance Assessment Report for the purpose of tender. **Knisco Inclusive Access** have produced an initial Access Assessment Report for the purpose of tender.

The Contractor is to ensure the works are complete and compliant with all relevant standards and authority requirements including but not limited to relevant building code, design access and mobility code.

Please note that **Knisco Development Solutions'** and **Knisco Inclusive Access'** commission with BAC will be complete on completion of tender award and it is recommended that the Contractor engages both **Knisco Development Solutions** and **Knisco Inclusive Access** for the remainder of the design & documentation, site inspections and the like.

2.16. Fire Engineering

The Contractor is responsible for the engagement of the Fire Engineer (acceptable to BAC), including submission, management, and obtaining Approval and completion inspections. The Contractor is to provide the appropriate Management in Use Plan upon completion of the WUC.

BAC has engaged **Omnii** to provide preliminary design input and produce the Performance Based Design Brief (PBDB) – attached in the Annexures.

2.17. Acoustics

The Works must be designed and constructed in accordance with the relevant Australian Standards, Building Codes, Industry standards, Airport land noise requirements set out in the Brisbane Airport's Australian Noise Exposure Forecast (ANEF) as published in the 2009 Master Plan, BAC Standards and Guidelines and compliance with the current BAC Approved Master Plan.

The Contractor is to engage an acoustic engineer to the completion of the design & documentation phases, construction phase, commissioning and handover. The Acoustic Engineer must provide an Acoustic Report which identifies how the design documentation complies with all necessary statutory and BAC requirements. The Acoustic Report must be reviewed and accepted by the Principal.

The Acoustic Engineer must provide a final report and certification to ensure that the construction of the facility is in accordance with Acoustic Engineers report.

The Contractor is required to perform final acoustic testing to confirm the building has been constructed in accordance with the acoustic performance requirements as part of Practical Completion.
BAC has engaged **Renzo Tonin** to provide preliminary design input and can be found in the Annexures.

2.18. Section J Compliance

Ashburner Francis have produced the project specific BCA Energy Efficiency Section J Report.

The Contractor is to engage an engineer (acceptable to BAC) to produce the final project specific NCC Section J Report Deemed to Satisfy Method Energy Efficiency Services.

The Contractor is to develop the design and is responsible for further investigations and compliance required. Any required JV Performance solutions will be by the Contractor.

2.19. BAC's Sustainable Initiatives

Brisbane Airport Corporation (BAC) is committed to improving its environmental performance and Sustainability. BAC plan to embed sustainability initiative into the design, construction and operations of their industrial precincts and developments. The Guideline below outlines the process, and minimum expectations for the ESD requirements.

The process described below provides guidance on the path required to show compliance with BAC's ESD criteria.

While based on the approach used by the Green Building Council of Australia's (GBCA) Green Star process, it is NOT a Green Star rating. Rather it is a set of scores that reflect the merit of various ESD initiatives applicable to industrial buildings. Please note the Scoring / Evaluation schedule draws upon the GBCA's Green Star rating tool to establish an equivalent benchmark to sustainable building performance.

2.19.1. Guideline (ESD Criteria)

This project is to achieve **4-star Green Star alignment**, requiring a minimum of 15 points. The below is to be read in conjunction with the Scoring / Evaluation schedule provided in Annexure B.

Emphasis should be placed on meeting the intent of each initiative, with sufficient evidence to support the claim that the initiatives have been achieved.

A self-certification method will be adopted on this project. It is expected that the Contractor will engage a suitably qualified ESD consultant to provide the following:

- a. an ESD Pre-Assessment outlining the pathway they intend to take to achieve 17 points (15 required points and 2 buffer points to allow for changes during construction) in addition to the minimum requirements.
- b. Convening of up to 2 meetings with the design/construction Team to outline the requirements for each point targeted.
- c. Contractor to develop an ESD Report outlining the performance specification of initiatives incorporated in the project, including populating the PPR Annexure B Green Star Buildings Proposed Pathway.
- d. Collation of evidence to demonstrate compliance with ESD initiatives targeted.
- e. Final ESD report required 3 months after Practical Completion outlining the method of compliance with BAC's PPR Annexure B Green Star Buildings Proposed Pathway.

BAC may engage an independent ESD consultant to peer review the above process and deliverables. Any non-compliance identified will need to be rectified by the Contractor, or an alternative approach presented to ensure mandatory credits are met and the additional 15 points are achieved.

2.20. Traffic Study and Analysis

PSA Consulting have undertaken traffic studies and produced a Traffic Impact Assessment (TIA) and swept path drawings, which can be found in the Annexures.

The Contractor is to engage an engineer (acceptable to BAC) to develop the design and is responsible for further investigations and compliance required. To be designed and constructed in accordance with the relevant BAC requirements, Australian Standards, Building Codes, and industry standards.

2.21. Landscaping – Selected Subcontractor Work

The Contractor is to engage a Landscape Architect from the list of Selected Subcontractor outlined in Annexure Part A to the Contract, to carry out the design of the all-project specific landscaping. A workshop (hold point) is to be held with BAC in preparation of the landscape design to discuss the precinct landscape requirements and how the design can keep within budget prior to any landscape design commencing.

Landscape design package is to be developed in accordance with all BAC Design Guidelines and must provide the following as a minimum:

Table 7 Minimum Landscape Deliverables

Design Stage	Description
Concept/Schematic Design	The Landscaping Consultant shall develop the Concept design package for presentation to and endorsement by BAC. The Concept Design should include details of hard and soft landscaping, planting schedule, finishes schedules, lighting schedules and design and renders/3D model presentation.
Detailed Design	The Consultant shall further develop the design into precise drawings and specifications at a level of detail suitable to progress to IFC documentation. Typically, the Landscaping developed design deliverables (in addition to the general deliverables include: • All design decisions made • Complete design submission • Final list of drawings, schedules, scope of works, and specifications • Final Landscaping drawings It is noted that the BAC Project Manager must be consulted to confirm the deliverables and to approve any systems that are not on the BAC standard approved systems list before proceeding to the next stage.
Construction Documentation (100%)	The Consultant shall finalise the developed design (based on BAC feedback/comments) into the Issued for Construction set which will be used by BAC to construct the Works. Typically, the Landscaping detailed design deliverables are to be in accordance with the general deliverables.

For absolute clarity, landscaping scope is to include but is not limited to:

- Soft landscaping
- Hard landscaping (pavements and the like)
- Civil works
- Fencing
- Irrigation conduits
- Landscape furniture
- Lighting

2.21.1. Landscaping Provisional Sum (excluding Activation Area)

A sum of **\$TBC Excl GST** is nominated as a provisional sum for the soft landscaping. All hard landscaping works, water connections / meter (incl RPZ), concrete paths / paving and the like are to be included in the contract sum.

For absolute clarity:

Included in Provisional Sum:

- a. Soft landscaping
- b. Plants (incl. turf)
- c. Soil
- d. Mulch
- e. Project management, supervision and administration
- f. On-site and off-site overheads
- g. Margin

Excluded from provisional sum:

- a. Landscape architect fees
- b. Hard landscaping (pavements and the like)
- c. Civil works
- d. Fencing
- e. Irrigation conduits
- f. Landscape furniture
- g. Lighting

2.21.2. Activation Area Provisional Sum

A sum of **\$TBC Excl GST** is nominated as a provisional sum for the Activation Area. This provisional sum includes for the following scope elements:

- a. Hard landscaping.
- b. Lighting
- c. Signage including wayfinding, statutory and mandatory BAC types.
- d. Fixed Furniture and Equipment (FFE).
- e. Garden beds, raised areas, decking, integrated furniture, bollards, bike storage equipment,
- f. Paving, stairs, ramps, handrails, tactiles, line marking, fencing
- g. Services including stormwater, irrigation, hydraulic.
- h. Project management, supervision and administration
- i. On-site and off-site overheads
- j. Margin

Excluded from provisional sum:

- a. Landscape architect fees

2.22. Samples & Prototypes

The Contractor must:

- a. Provide 2 No finishes boards for approval by the Principal and Tenant. Once approved, one of the finishes boards should be kept on site in the site office and available for reference.
- b. Submit and arrange suitable times for the inspection of samples of equipment, fittings and accessories to obtain approval of the principal prior to purchase;
- c. Allow to develop and maintain a detailed sample register and to the satisfaction of the Principal Representative;
- d. Ensure that all samples put forward for approval are in accordance with the project brief and within any specified provisional sums. Where this is not the case the Contractor is to provide details of any cost differences up front before seeking sample approval;
- e. Provide specific samples as directed by the Principals Representative;
- f. Provide samples of each item clearly identified with the manufacturers and supplier's names and warranty details;
- g. Upon acceptance by the Principal, mark the samples with the date approved, name of approving authority, brief reference clause and area where items are to be used;
- h. Retain the samples in a secure nominated location on site until completion of the project;
- i. Allow for a minimum of 10 business days for principal sign off of samples and where required additional time for Tenant sign off; and
- j. Provide a monthly update and sample register in monthly reporting.

The Contractor shall construct, and thereafter shall maintain until Practical Completion, the following sample panels (which may form part of the permanent works) for inspection and approval by the Principal and for the purpose of setting a benchmark of the standard and quality of workmanship to be achieved in compliance with the standards and quality prescribed within the Contract Documents.

The sample panels to be constructed are:

- a. As requested by BAC.

2.23. Alternative Products

The Contractor may provide alternative products to those selected or specified in the PPR Documents (Annexure B hereto) for approval and acceptance by the Principal's Representative and the corresponding BAC Stakeholder/SME.

Approval and acceptance of any alternative product is at the sole discretion of the Principal's Representative who may:

- a. summarily reject the alternative product without giving reasons for doing so,
- b. unconditionally approve the alternative product, or
- c. approve the alternative product subject to conditions.

With an application for approval of an alternative product the Contractor must provide full details for the product including confirmation of compliance with all relevant legislation, test certificates (if applicable), manufacturer's standard warranty or guarantee, manufactures installation recommendations, samples as

required by and to the satisfaction of the Principal, and (where relevant) operational and maintenance requirements and life cycle costing. This must be listed against the same details of the originally specified product to demonstrate equal or better product/compliance.

The Preliminary Design includes details as required by the Tenancy Building Brief, the Contractor may provide alternatives with their tender submission for consideration by BAC. Alternatives should be provided with detail on where any departures from the PPR exist. All alternatives are subject to BAC approval.

3. GENERAL PROJECT REQUIREMENT & SPECIFICATIONS

Where an Industrial or Tenant Building Brief is provided, it will take precedent over this document to the extent of any discrepancy. Any discrepancy is to be advised to the Principal's Representative as soon as identified.

3.1. Imported Fill & Excess Material

- a. Refer to the BAC Guidelines available per *Section 2.3* for details and procedures.
- b. The Contractor is responsible for obtaining all ABC approvals for soil movement off site.
- c. The Contractor is deemed to have allowed to stockpile excess material on site until the approval to export is granted.
- d. The Contractor is to allow for relocation of any excess fill from the project site to other nominated areas at BAC, including dumping and stockpile preparation, environmental and civil controls, and the like as required by the ALCC and ABC.
- e. Fill resulting from spoil recovered from site excavations; or borrow material is to be confirmed by the geotechnical engineer on its suitability as fill material for reuses.
- f. The Contractor is to allow for relocation of excess fill (determined as suitable for reused by the Principal and subject to availability) from the project site to other nominated receival sites at BAC.
- g. Excess material that is not fit for reuse at BAC is to be removed from site and disposed of accordingly. The contractor shall seek BAC approval prior to removing any material, allowing a period of 28 days for BAC to respond.
- h. Prior to the relocation of any material, the Contractor is to characterise the site and/or fill in accordance with the applicable legislation including NEPM / NEMP for contaminants of potential concern. Should the material to be relocated prove to be impacted by one or more contaminant the contractor must provide additional information and or reports (including a risk assessment) as requested by BAC in support of this relocation. The Contractor shall be responsible for the development and implementation of all plans including erosion and sediment plans for the receival site.
- i. Should a suitable permanent receival site not be available, the Contractor shall develop and implement a stockpile management plan for the temporary (up to one year) stockpiling of the fill including establishing all appropriate environmental controls and undertaking any required monitoring and inspections.

3.2. Tenancy Master Keying

Landlord (Principal) Master Keying:

The master keying system shall be as follows to BAC controlled areas (door locks, padlocks and the like);

- a. Keying will be KABA series UT1321
- b. Cleaners – 112009 keyed to also take 102000, 100000, 000000
- c. Mechanical – 201019 keyed to also take 201002, 201000, 200000, 000000
- d. Electrical – 201002 keyed to also take 201000, 200000, 000000
- e. HV – 900033
- f. Roof & Roof Access – 201033 keyed to also take 201000, 200000, 000000

Communications rooms and cabinets will be fitted with EKA cylinders. These will need to be programmed by BAC, into their system, before being fitted to the relevant equipment/doors.

Contractor to allow for a walk-through with BAC stakeholders prior to finalisation of design.
The Contractor is to allow for a registered Lockwood master keying system to the following doors:

- a. All external doors.
- b. All internal doors.
- c. The Contractor is to allow to supply a total of 10No keys.
- d. The Contractor is to allow for a locksmith to fit all cylinders and issue all master keys.

3.3. Ceilings and Glazing

3.3.1. Window Furnishings

- a. Perimeter blind may be added by the Tenant as part of their fit out, therefore the Contractor is to ensure the ceiling/perimeter design has a suitable pelmet section to take the installation of blinds/window furnishings.

3.3.2. Ceilings

- a. Refer to the Architectural drawings and the Tenancy Building Brief for details

3.4. Steelwork and Metalwork

3.4.1. General

- a. Steelwork finishes to be either 316 stainless steel or hot dipped galvanised finish.
- b. Aluminium finishes to be powder coated (unless otherwise noted).
- c. Hide the visual impact of access stairs (e.g. roof access system, water tanks etc.) and seek approval of location with BAC.
- d. Stainless steel tactile indicators (button/individual).

3.4.2. Bollards

- a. Bollard protection (2 x external and 2 x internal) to all at grade roller shutter openings.
- b. Bollards / corner guards to all trafficable building corners.
- c. Bollards to be 219mm galvanised steel, painted safety yellow and filled with concrete.
- d. Protection will also be required to downpipes, plant and equipment where exposed to trafficable areas, and exit doors externally.

3.4.3. Fencing, Gates and Screening

- a. Refer to Architectural drawings for details of fencing and gates.
- b. All plant and equipment areas to be screened (aluminium battening as a minimum).
- c. Drawings to be provided to the Principal's Representative for approval.
- d. Fencing adjoining or within the Airside zone needs to be designed and installed in accordance with the BAC Airside Fence details.

3.5. Signage

3.5.1. **General**

- a. Allow for power and provision for power as indicated on the documentation.
- b. The Contractor is to allow for all statutory and wayfinding signage, as shown on the tender design drawings, in accordance with code, and as required in the BAC Guidelines as per *Section 2.3* (e.g. labelling to Communications Room cupboards, MSB, Main FIP Cupboard, DB cupboard etc.).

3.5.2. **BAC Main Sign**

- a. Indicative Location as shown on the Architectural documentation. Sign type to be BAC **Type 5** at the entrance to the development.
- b. Details for the Signage Type can be found in BAC's Site Signage Manual. The Contractor is to allow for the design, supply and fabrication installation of the above-mentioned signage.
- c. The Contractor is to ensure that the positioning / location of the pylon signage does not create any "line of site issues" for traffic entering or exiting the development.

3.5.3. **Tenancy Signage Provision**

- a. Generally noted by "Tenant Signage" on the documentation.
- b. The Contractor is to allow for the sub - structure, panelling, conduits/drawcord, substrates etc. as part of the base building works.
- c. Tenancy signage application will be by the Tenant.

3.6. Painting and Line Marking

3.6.1. **General**

- a. Painting to concrete panels is to be heavy textured paint finish.
- b. Refer to Architectural finishes schedule and specifications for details.

3.6.2. **Line Marking**

- a. All pavement marking to be chlorinated rubber / Alkyd Road Marking paint.
- b. Line marking to concrete hard stand to be A1 Road master (or equivalent). Yellow finish.
- c. Line marking to asphalt carpark to be white line marking paint.
- d. Refer to the Civil documentation for further details.

3.7. Services

3.7.1. **Building Management System**

- a. The Contractor shall provide for the design, supply, installation, commissioning and maintenance of project specific BMS (Building Management System).
- b. A BMS (Building Management System) is to be provided. BAC implement a fully BACNET compatible BMS system that is remotely controlled and monitored by the BAC Facilities Team. This can be done via the local end and head end. The BMS system has the provision and functionality to monitor and manage the mechanical services, electrical services, fire and hydraulic services installed (via HL and LL interface).

- c. The BMS system must interface with the mechanical services, electrical services, fire services, hydraulic services, and transportation services.
- d. Refer to the BAC BACnet Conformance Guidelines, and latest BAC EBI Style Guide.
- e. Generally, the Contractor as a minimum will need to provide in the following order (for acceptance by BAC):
 - i. Coordinated BMS points list (all services).
 - ii. Description of Operation (or Functional Specification) for BMS.
 - iii. Head end screen builds.
 - iv. Programming of works on site.
 - v. Testing and commissioning for functionality of BMS.
 - vi. Witness testing with BAC Stakeholders.
 - vii. Final confirmation of functionality including head end operation.
- f. The Contractor is to arrange design meeting with the BAC Stakeholders to review and establish the necessary details and hold points associated with the works to allow for the inspection and sign off of installed works.
- g. As a condition precedent to Practical Completion, the Contractor is required to arrange witness testing and demonstrate BMS completion and functionality with the BAC Stakeholders and gain approval.

3.7.2. **Mechanical Services**

- a. Air conditioning services to be provided in accordance with the services performance briefs/specifications and Australian standards.
- b. Each A/C system shall include automatic controls consisting zones, temperature sensors and control panels. Include for after-hours controls and zoning to each area.
- c. The A/C Control System must provide the following functionality:
 - i. Once commanded to run, each VRF/VRV air-conditioning system is to operate via its own integral control system.
 - ii. Start/stop scheduling is to be managed through the EBI global schedules.
 - iii. Occupants may use the local A/C keypad to:
 - iv. Adjust the temperature setpoint within a $\pm 2-3^{\circ}\text{C}$ range
 - v. Adjust fan speed
 - vi. Control On/Off operation after hours
 - vii. The system is to be monitored by the EBI to support BAC's maintenance management requirements.
- d. Dedicated air conditioning system to the shared communications room.
- e. Mechanical ventilation services to be provided in accordance with the services performance briefs/specifications.
- f. All external louvres are to be minimum 2 (double) staged (including vermin proofing).
- g. Any electrical boards exposed to the elements are to be 316 marine grade stainless steel, or marine grade aluminium, and have adequate over-head weather protection for maintenance. Boards are to be located adjacent to the plant and equipment.
- h. BAC facilities require clear access to each internal tenancy unit for the purpose of safe maintenance. The Contractor is to co-ordinate the layout and location of the internal units (e.g. FCU's) with the tenants fit out layout.
- i. Mechanical electrical works are to comply with the same requirements for general electrical services.

3.7.3. **Electrical Services**

- a. General:
 - i. Spare conduits required under driveways are 2 x spare 100mm diameter white conduit for communications, 2 x 150mm diameter orange conduit for electricity, and 1 x 100mm conduit for future irrigation.
 - ii. Ensure bollards and Armco rail adjacent to electrical services are earthed.
 - iii. Ensure design incorporates required clearances, particularly at switch boards and transformer.

- b. BAC Approved "LED" Lighting Suppliers (Internal):
 - i. Minimum 5 years warranty
 - ii. 10 year warranty on warehouse high-bays
 - iii. Advanced Lighting Technologies (Gerard Bowtell-Harris 0411073681)
 - iv. LAD (Jared Arden 0418353868)
 - v. Gerard Lighting
 - vi. Raylinc (Marissa Xerri 0732167969)
 - vii. Zumtobel Lighting Australia (Jill Thornton 0409472841)

- c. BAC Approved "LED" Exit and Emergency Lighting Suppliers:
 - i. Clevertronics;

- d. BAC Approved "LED" Lighting Suppliers (External):
 - i. Minimum 10 years warranty
 - ii. Advanced Lighting Technologies (Cree Edge Series) – Rob Chambers 0411073681
 - iii. Gerard Lighting
 - iv. LAD – Jared Arden 0418353868
 - v. Raylinc
 - vi. Zumtobel Lighting Australia – Jill Thornton 0409472841

- e. BAC Approved "LED" External Carpark and Hardstand Lighting:
 - I. Light poles to be GM poles, tapered, galvanised or finish to match colour of approved external light finish, access panel (or equivalent approved by BAC) and in accordance with the BAC Design and Technical Guidelines.

- f. BAC Approved MSB and DB Manufacturers:
 - i. Switch board Innovations
 - ii. Sunline
 - iii. Power Electric
 - iv. GB Electric's Pty Ltd
 - v. Trivantage (the old SJ Electrics)
 - vi. Lai Switchboards Australia
 - vii. Reed

g. Main Switch Board (MSB):

- i. Main Switch Board manufacturer is to be approved by the Principal's Representative and selected from the above list of contractors.
- ii. The Contractor shall provide two (2) inspections at the manufacturer's workshop including the appropriate testing/QA records.
- iii. Switchboard (including MSB, MSSB, DB) design and manufacture is to include the following BAC requirements;
 1. NHP or Schneider Grizz Bar chassis
 2. The cabinet door furniture should be:
 - A. The following equipment provides 3-point locking. The equipment is all Selectrix and the applicable part no.
 - B. Selectrix Stainless Steel Pad lockable Swing Handle 1107-SS02-316.
 - C. Cam 1000-1588-SS.
 - D. Rod Adapt SS - 2 Required.
 - E. Rod - 1200RSS-2 Required
- iv. The MSB is to be sized and designed in accordance with local electrical authority and BAC requirements. The Contractor shall calculate and submit for review maximum demand for all mains, sub-mains and sub-circuits. Sizing of Main Switchboard is to accommodate the following maximum demand:
 1. base building load of BAC Works; plus
 2. anticipated load for tenancy fit out works; plus
 3. 25% spare capacity.
- v. The Contractor is to ensure that sub mains and DB's are designed with the same 25% spare capacity as the MSB.
- vi. Finish of boards is to be 316 marine grade stainless steel or marine grade aluminium (if external), or powder-coated (if internal).
- vii. No lift-off hinges will be accepted. All swing doors to have compliant minimum clearance on open position.
- viii. External lights above doors details are to be provided to the Principal's Representative for approval prior to the specific Works proceeding.
- ix. MSB Solar Requirements – Main switch to be sized for future provision of solar to the full roof capacity.
- x. Dedicated BAC solar cubicle to be provided.

3.7.4. Metering and BAC Smart Metering

- a. The Contractor shall provide for the design, supply, installation, commissioning and maintenance of project specific SMS (Smart Metering System), and must comply with BAC Smart Metering Requirements and Section J of the BCA/NCC, BAC Design Guidelines and Technical Specifications, and connected to the BAC communications network.
- b. BAC implement a smart metering system which allows the BAC Facilities Team to remotely monitor and read all utility meter readings.

- c. The SMS system must monitor all potable water, recycled water, gas, chilled water, electricity etc. in accordance with the Brisbane Airport Utility Metering Policy. Works to be connected to the BAC AMR through BAC's Communications Network.
- d. BAC preferred metering contact is **John Driver from Smart Building Services**. The Contractor is to engage Smart Building Services to undertake the BAC metering.
- e. Generally, the Contractor as a minimum will need to provide in the following order (for acceptance by BAC):
 - i. Coordinated SMS schematic (all services) reviewed with the BAC Stakeholder prior to commencement of works. All separate functional areas need to be metered separately (BAC Metering Policy).
 - ii. Submit comms interface schematic to the BAC ICT Manager.
 - iii. Finalise for construction schematics and documentation.
 - iv. Programming of works on site.
 - v. Connect to BAC network.
 - vi. Testing and commissioning for functionality of SMS.
 - vii. Witness testing with BAC Stakeholders.
 - viii. Final confirmation of metering commissioning data to be handed over to BAC Facilities in agreed format.

3.7.5. BAC ICT (Communications, IT and Data Security)

- a. The Contractor shall provide for the design, supply, installation, commissioning and maintenance of the project specific BAC Communications and IT System.
- b. BAC implement an airport wide fibre network which allows BAC Facilities Team to control, read, and monitor etc. all BAC buildings. Each new building requires a designated comms room to house the active and passive equipment (by the Contractor).
- c. BAC Communications services include (but not limited to) network connections for:
 - i. BMS
 - ii. FIP and secondary PSTN connection
 - iii. Vertical transportation lines
 - iv. UPS
 - v. CCTV
 - vi. Siemens Sipass (Access Control)
 - vii. Boom gates and ANPR
- d. The Contractor is to include (but not limited to):
 - i. Comms Distributor (for BAC active equipment)
 - ii. Comms Distributor (for MDF)
 - iii. Cabinet (rack) in BAC Comms Distributor
 - iv. Cable Pathway
 - v. Cabinet Power
 - vi. Cabinet Mounted UPS
 - vii. Fibre Installation
 - viii. Data and Voice Cabling Installation

- ix. Fire Panel Secondary PSTN Connection
- x. UTP Patch Leads
- xi. Patched Fibre Service
- xii. Labelling
- xiii. External Pit and Conduit Connections
- xiv. Network Equipment
- e. BAC nominated IT contractors are:
 - I. Data 3
 - II. Programmed
- f. Generally, the Contractor as a minimum will need to provide in the following order (for acceptance by BAC):
 - i. Coordinated ICT schematic.
 - ii. Updated ICT schematic.
 - iii. Pit selections and site layout.
 - iv. Finalise for construction schematics and documentation.
 - v. Request an establish BAC labelling schedules.
 - vi. Progressive inspection by the ICT Stakeholder.
 - vii. Testing and commissioning.
 - viii. Witness testing with BAC Stakeholders.
- g. Refer to the BAC Communications Scope of Works in Annexure B.

3.7.6. Pad Mount Transformer and Substation

- a. Power and Communication Services for the development will be fed from the existing Transformer/Substation. The Contractor is to refer to the project documentation for details. All works associated with connection from the substation to the building are the responsibility of the Contractor.

3.7.7. Hydraulic Services

- a. All connections to be in accordance with BAC requirements.
- b. Boundary water meter assembly connection.
- c. Hydraulic Services are to be metered in accordance with BAC's Metering Policy and Guidelines.
- d. Booster assemblies.
- e. Hydrants, hose reels and the like.
- f. Hose cocks/taps to all plant areas and at locations for general building cleaning and maintenance. Isolation valve required on each point.
- g. Hose cocks/taps to all plant areas and at locations for general building cleaning and maintenance. Isolation valve required on each point.
- h. Tap fittings need to be approx. 100mm off the wall to allow for connection of the waterproof systems on the hoses etc.
- i. Flow meters are to be installed to all new incoming fire supply lines to site.

3.7.8. **Fire Services**

- a. All work shall be carried out in accordance with the following codes, standards and regulations:
 - i. Australian Standards
 - ii. BCA / NCC
 - iii. Airport Rescue & Fire Fighting (ARFF)
 - iv. Authority Requirements
- b. Fire Alarms:
 - i. Install alarms/detection and occupant warning system.
 - ii. FIP to be "Notifier" type.
 - iii. FIP to have BMS and security system interface.
 - iv. Contractor shall supply and install Romteck fire monitoring equipment to the FIP.
 - v. Ensure Romteck unit is wired properly to signal faults back to ASA (Air Services Australia).
 - vi. Ensure smoke detector threshold readings from the FIP provided into BMS.
- c. Fire Extinguishers:
 - i. Fire Extinguishers to be installed as required.
- d. Fire Emergency and Evacuation Planning:
 - i. The Contractor is to allow for the necessary fire emergency and evacuation planning for the building/s.
 - ii. BAC recommend **Garry Dawson from Fire EMT Pty Ltd** (0421 438 654 or email (garry.dawson@fireemt.com.au).
- e. Fire Services Monitoring and Romtek Unit:
 - i. The Romteck unit has two forms of communication with the ARFF:
 - A. The primary connection is via the Telstra mobile phone network
 - B. The secondary connection is via a hard line PSTN connection via the BAC network
 - ii. The Contractor must use a licenced and approved Romteck installer to undertake these works.
 - iii. Prior to, the Contractor is to obtain approval from the BAC Stakeholder of the person undertaking the installation.
 - iv. Please note the following website link for the relevant information:
 - v. <http://www.airservicesaustralia.com/services/automatic-fire-alarm-monitoring-service/>

3.7.9. **Lift Services**

- a. BAC Approved lift suppliers
 - i. Otis
 - ii. Kone
 - iii. Schindler
 - iv. Queensland Elevators
 - v. Or otherwise approved by BAC

3.7.10. **Solar**

- a. The Contractor shall allow in the base building design for installation of a solar power roof mounted systems to the full capacity of the roof. Included in the base building is, but not limited to:
 - i. Structural capacity in the building structure to take the system weight / loads
 - ii. Provision for connections into the MSB, and additional breaker requirements.
 - iii. Refer to 3.7.3 *Electrical Services* for MSB solar requirements.

3.8. **External Works**

3.8.1. **General**

- a. The Contractor will be responsible to design, supply, install, construct, test, commission, service, warrant and maintain for a period of 12 months all external works, to suit the layout and the requirements of the project. The works must be a complete and compliant with all relevant standards and authority requirements including but not limited to the design access and mobility code AS1428.
- b. Design will also need to take into account external lighting and access requirements in accordance with both BAC planning guidelines and relevant authorities and standards, to all necessary areas.
- c. The Contractor is to ensure the building design allows for perimeter building cleaning and access. Hose cocks/taps are required to plantrooms, plant areas and at general spaced locations around the development.
- d. The work of this section includes for all obvious and incidental work to complete the external works in accordance with the relevant Australian Standards, Building Code of Australia and to the satisfaction of the Principal and all authorities, whether expressly mentioned or not within this PPR.
- e. All temporary compounds and other areas disturbed by the Contractor are to be rectified/repaired to their original state.

3.8.2. **Wheel stops**

- a. Wheel Stops to be compliant with applicable Australian Standards (AS / NZS 2890.1:2004)
- b. Minimum 3 x fixings into pavement

3.8.3. **Concrete**

- a. Armoured joints at all thresholds.
- b. Class 2 finish where surfaces are visible and non-painted (any painted walls to have textured paint).
- c. Any exposed blockwork finish (un-rendered) to be quality face-finish, capped and sealed.
- d. Refer to Structural documentation for details, loadings, finishes, tolerances, etc.
- e. The Contractor is to provide a QA concrete finishing proposal (methodology, plan, wind protection etc) in conjunction with their Structural Engineer, for review and acceptance by the Principal prior to commencing the Works.

4. BAC REQUIREMENTS

4.1. Site Establishment & Car-Parking

4.1.1. *Fencing & Hoarding*

The Contractor must secure the site with good quality temporary fencing (to the Principal Representative's satisfaction) along the boundaries of the site.

All temporary fencing, shade cloth / signage must be safe and securely fixed to resist ultimate limit state wind loads determined in accordance with AS 1170.2 or 100m/s (whichever is the greater). The Contractor shall permit BNE Property signage/logo on temporary fencing. All fencing and fence signage is to be approved by BAC prior to application (Refer to the BAC Guidelines available per *Section 2.3*).

The Contractor is to allow for the supply and installation of BAC branding signage panels as noted below:

- a. Temporary fence signage panels to be custom printed premium banner mesh. Half of each roll to be BAC advertising. BAC to provide graphics.

4.1.2. *General*

The site establishment must not encroach upon existing services corridors and/or easements.

The Contractor is to ensure all kerbs, kerb crossings, vehicular crossovers, footpaths, in-ground services and services reserves/corridors are adequately protected to ensure no damage to BAC infrastructure (steel plates and other means).

On completion the Contractor is to reinstate the disturbed areas back to the original state. Ground areas to be shaped (no ponding), hydro-mulched and include all necessary sediment/erosion and environmental controls. Works are to be to the satisfaction of BAC.

4.1.3. *Compound*

The Contractor is to establish the site compound (offices, toilets, meeting rooms, staff parking, site worker parking etc.).

4.1.4. *Parking*

Parking is not permitted on the surrounding roads and verges. Parking during construction is permitted on the site subject to BAC approval (Refer to the BAC Guidelines available per *Section 2.3*) and compliance with BAC environmental requirements.

The Contractor is responsible for managing all operational aspects of the temporary carpark, inclusive of perimeter sediment & erosion control, security, dust control, refuse collection, noise and the like. Areas used for temporary parking are to be reinstated to their original condition within 7 days after Practical Completion.

4.2. Environmental Management

For the purpose of this section a *sensitive receptor* means:

- a. a permanent or temporary dwelling, or
- b. an impermanent dwelling in a place designed, or reserved, for impermanent dwellings (for example, a caravan park, or residential marina); or
- c. a hotel, motel or hostel; or
- d. a childcare institution, kindergarten, school, college, university or other educational institution; or
- e. a hospital, medical centre or nursing home; or
- f. a building that is a church or similar place of worship, or

- g. a protected area such as a nature reserve and a marine park, or
- h. a place of business, including commercial and retail activity, or
- i. a detention or correctional facility or transit accommodation centre, or
- j. a building that provides accommodation for animal(s) overnight, including stables, kennels or an animal training facility, or
- k. an adjoining landowner, local council land or infrastructure.

The Contractor must take all reasonable and practical measures, including monitoring and testing, to the satisfaction of the Principal and Principal's Representative, to ensure the protection of any sensitive receptor in the vicinity of the Site from environmental harm resulting from the work under the contract, including but not limited to:

- a. Contamination and pollution
- b. Noise
- c. Dust
- d. Nuisance, interference or undue disturbance to the normal activities carried out at a sensitive receptor.

4.3. Project Electronic Communication

The Contractor is required to:

- a. Submit all documentation and correspondence attachments in a controlled PDF format (printed to PDF).
- b. Title all correspondence "BAC Skygate Play" followed by the associated topic.
- c. BAC has established Aconex for this project and is responsible for the payment of Aconex fees. All correspondence, documentation and contract administration must be via Aconex.

4.4. Site Meeting Room

For the duration of the Contract the Contractor shall provide a temporary air-conditioned meeting room either on the Site, or immediately adjacent to the Site, for the purpose of holding site meetings including PCG meetings.

As a minimum the meeting room will be 6.0m x 3.0m and be equipped with a table and chairs to seat 8 people.

The Contractor shall arrange for and pay all fees in relation to providing the Site Meeting Room.

The Site Meeting Room is to house the Samples, Prototypes, and Finishes Boards etc.

4.5. Meetings and Reporting

4.5.1. Monthly Reporting

The Contractor must prepare a monthly report (to the satisfaction of the Principal) prior to each month end. The report must include the following, together with any matter relevant at the date of the report:

- a. Executive Summary
- b. Schedule of key issues and status
- c. Design and Documentation status
- d. Approvals status
- e. Stakeholder engagement register

- f. Construction Program status showing anticipated completion, critical path and total float for all activities in primavera
- g. Progress Claim & Cost reporting
- h. QA and/or Non-conformances (including QA Register, Hold Point Register and Stakeholder Inspection Register)
- i. Safety & Environmental
- j. Samples register
- k. Trade letting status
- l. Progress photos
- m. Variation register
- n. EOT register
- o. Progressive photos of each area of the Works (minimum 10 photos)
- p. Any other items required by the Principal's Representative

The monthly report will form basis for discussion at the PCG meeting and submitted a minimum 48 hours prior to the PCG meeting.

4.5.2. *Weekly Reporting*

The Contractor is to provide the Principal's Representative with a weekly summary report each Friday during the project (format to the satisfaction of the Principal's Representative). The report is to be in a simple format and to identify the key items for resolution on the project, adequate progress photos (Min 10), responses and actions that the Contractor requires from the Principal.

4.6. PCG Meetings

PCG meetings will be monthly and shall be attended by senior management of the Contractor, BAC and the Principal's Representative. Others may attend by invitation of the Principal's Representative.

The monthly report will form the agenda for the PCG meeting. Refer to *4.5.1 Monthly Reporting* for requirements.

The Contractor will convene and chair the PCG meeting and will be responsible for taking and distributing minutes within 48 hrs of the meeting.

4.7. Design Meetings

Design meeting will be conducted at least fortnightly during the first 3 months of the Project and thereafter as agreed in the PCG meeting. The Principal's Representative shall be invited and may attend.

The Contractor will convene, chair and be responsible for taking and distributing minutes.

The purpose of the meeting is to manage and review the development of the design and construction documentation. Consultant's representatives for each design discipline shall attend as required.

The Contractor is to ensure the Safety in Design process is captured to the approval of the Principal.

4.8. Site Meetings

Site meetings will be conducted on a fortnightly basis or as otherwise agreed with the Principal's Representative.

The Contractor shall convene, chair and be responsible for taking and distributing minutes.

The purpose of the meeting is to review:

- a. construction methodology
- b. progress
- c. review of critical activities
- d. matters impacting (or may adversely impact) construction works
- e. look ahead at upcoming activities
- f. non-conformances

4.9. Programme

The Contractor is to provide a working day calendar in excel format.

A detailed construction programme is to be submitted to the Principal's Representative within 14 days of the date of the Contract.

The programme shall be prepared in critical path network format using Microsoft Project, Primavera or as otherwise agreed with the Principal's Representative, and shall clearly indicate: (check double up with contract)

- a. the planned sequence for carrying out the Works
- b. the planned duration for each work activity
- c. all critical activities, including a complete critical path from commencement to Practical Completion
- d. key dates for procuring, manufacturing and delivery of imported goods and materials
- e. major lead times
- f. any delay contingency
- g. float (where float exists) relevant to each activity and milestone dates
- h. no activity greater than 35 working days unless agreed otherwise by the Principal Representative
- i. design and documentation durations, including the planned date for completion of documentation to a 'For Construction' status
- j. milestone dates for Shop drawing submissions
- k. milestone dates for BAC Stakeholder and Peer Reviewer meetings
- l. commissioning periods
- m. milestone dates for BAC Stakeholder and Peer Reviewer completion inspections
- n. early access dates for Tenant
- o. the date for Practical Completion

With each update of the programme, the Contractor must also submit a project calendar for the duration of the Project clearly notating working days.

Date for Practical Completion:

- a. The Contractor is to submit their nett programme as part of tender (exclusive of inclement weather delay) and include the Tenant early access date.
- b. Prior to awarding the contract the Date for Practical Completion will be determined.

4.10. Quality Assurance

The Contractor must maintain an appropriate project specific Quality Assurance Management Plan, to the satisfaction of the Principal's Representative. The Principal and Principal's Representative will undertake progressive QA inspections on site from time to time.

The Contractor is to include in their QA documentation (including but not limited to):

- a. Photos for each trade (pre-backfill, pre-sheet etc.)
- b. Stakeholder / Peer Inspections notes and corrective activity.
- c. Waterproofing details and procedures.
- d. Roofing inspections by the warrantor/manufacture to ensure the appropriate parties sign-off the installation of the roofing is compliant and approved.
- e. CCTV to sewer and SW lines on completion, provide the DVD/USB and marked up drawings clearly noting the procedure so that each line is coordinated.

4.11. Site Camera(s)

BAC has partnered with **Blackbox** to provide remote monitoring/ timelapse services for all Property Development sites on the airport. BAC will directly engage **Blackbox** to supply, install, manage and remove cameras and associated infrastructure throughout the life of the project.

- a. The Contractor must allow to co-ordinate all necessary approvals and access requirements for the installation and removal of camera equipment.
- b. Location of the camera will be determined in consultation with the Contractor to avoid any clashes with onsite requirements.
- c. The Contractor will be provided with a login by BAC to remotely access footage.
- d. The material/video footage will not be used by the Contractor or published externally (i.e. on social media) by the Contractor unless consent is given by the Principal in writing.
- e. The construction site will be filmed for the purposes of marketing as well as monitoring construction progress.
- f. The camera will operate and record 24 hours per day, 7 days per week from project commencement until Practical Completion is achieved.
- g. The Contractor must provide 10 business days' notice to BAC before proposed camera installation date to allow for procurement and mobilisation.

4.12. Other Contractor's

BAC may directly engage Other Contractors to perform work on or around the Site, including but not limited to:

- a. Fit out Contractors for the Tenant's fit out works
- b. BAC personnel.
- c. Specialist Contractors.
- d. Other Contractors undertaking alterations to existing inground services.

The Contractor shall permit Other Contractor's onto the Site and permit the use, by other Contractors of such site facilities commonly provided by the Contractor for use by its subcontractors, including lunchrooms, ablutions, temporary power, hoists, scaffolding and rubbish bins

The Contractor must ensure the safety of the other Contractor's and Artists in accordance with all relevant workplace health and safety regulations and codes.

4.13. Tenant Early Access

The Contractor shall grant the Tenant access by way of a licence agreement for integrated fit-out works. The access period will be as per the timeframes nominated in Agreements for Lease – refer to Annexure A for redacted Agreement for Lease(s).

Access will be provided at no cost during this period.

4.14. Completion

The Contractor is to provide and maintain a live management plan for the completion activities to the satisfaction of the Principal's Representative, including but not limited to:

- a. Completion Programme
- b. Principal and Tenant Training Completion Requirements
- c. Checklist (emphasising preconditions to PC)
- d. Building Approval conditions completion checklist
- e. Certificate of Completion (CoC) checklists
- f. Checklists identifying all BNE, ALCC, ARFF and ABC mandatory completion requirements.

4.15. Utilities and Connections

The Contractor shall provide all necessary temporary and permanent services and utility connections (including metering) via existing infrastructure outside of the site boundary to the required final locations within the development.

The Contractor shall provide all associated builders works, approvals, site investigations, potholing, temporary works and bridging over existing services required to undertake all connections, and relocation of existing inspection points/pits where necessary.

The Contractor must liaise with BAC and any external stakeholders (as required) at the commencement of design to establish the necessary hold points associated with connection works to allow for the inspection and sign off of installed infrastructure.

The Contractor is obligated to and manage the following:

- a. Obtain approval for any necessary services isolations
- b. Keeping life safety system operational and in place during the works
- c. Provide temporary services/generator during any downtime
- d. Liaising with external authorities and co-ordinating any communication works required by external authorities in connection with the WUC
- e. Relocation or duplication of existing services required to deliver the WUC.

4.16. BAC Asset Management System (Maximo)

The Contractor must provide asset information and associated outputs related to Asset Management in accordance with:

- a. BAC Airport Design Guidelines (ADG 900 series).
- b. BAC Airport Design Guidelines (ADG 050).
- c. BAC Asset Naming Standards outlined in the LOD and LOI Matrix spreadsheets.
- d. BAC Maintainable Asset Register BIM Template.

- e. All other documents listed in the BAC Standards / Maximo Reference documents.

A Maintainable Assets Register (XLS format), separated by discipline, is to be submitted with the final project completion As Constructed deliverables. It is the responsibility of the nominated project DE Manager to develop and implement any workflows required to enable the Register to be progressively populated in the model and for the final register to be derived directly from the model.

The Register is also to be submitted at For Construction milestone in draft form for checking.

The LOD Matrix identifies what elements are considered Maintainable Assets and so must be included in the Register. All Asset data populated in the model must comply with all LOI requirements. An Excel Template of the Register will be issued with the DE Standards Package and must be used as the basis for the model-derived Register. The Template clearly indicates which fields must be inherited directly from the model, which fields must be input directly into the Register, and which fields will be populated by BAC.

The Contractor is to arrange a draft issue of the final documentation for the BAC Facilities team to review to ensure that all assets are included in the Project Information Models, published drawings and Asset Registers.

The Contractor shall populate the final Asset Register with preventative maintenance requirements for approval by BAC's stakeholder prior to Practical Completion.

The Contractor shall provide a breakdown of construction and equipment supply costs suitable for an asset depreciation register broken up within the appropriate tax divisions to the satisfaction of the Principal.

Refer to the BAC Guidelines available per *Section 2.3* in relation to Asset Management and Maximo.

4.17. Document Submissions

Submissions must be via Aconex to the Principal's Representative.

The Documentation Bank Guarantee will not be released until the Asset Registers have been received and approved by BAC Stakeholders.

- a. Submission Procedure – the following key milestones apply:
 - i. Issue For Construction
 - 1. The Contractor must submit:
 - A. Draft Maintainable Assets Register derived from PIMs separated by discipline in accordance with BAC Airport Design Guidelines (ADG 900 series).
 - ii. As Constructed
 - 1. The Contractor must submit:
 - A. Maintainable Assets Register derived from PIMs separated by discipline and including the required maintenance schedules in accordance with BAC Airport Design Guidelines (ADG 900 series).
- b. A draft submission must be provided 1 month prior to Practical Completion with the final submission of all deliverables to occur at practical completion.

4.18. Defects and Maintenance Period

4.18.1. Defects

- a. Practical Completion:
 - i. Prior to Practical Completion defects inspections will be carried out progressively by the Contractor;
 - ii. The Contractor is to confirm all progressive defects have been closed out prior to the Principal Representatives inspection for Practical Completion;
 - iii. All defects raised by the Principals Representative are to be closed out within 1 (one month) after Practical Completion or as otherwise noted (in the event of critical defects)
- b. Defects Liability Period
 - i. The Defects Liability Period is for 12 months following the Date of Practical Completion of SP2.
- c. Final Completion:
 - i. A Final Completion defects inspection will be held prior to Final Completion;
 - ii. 1 month prior to Final Completion the Contractor is to arrange a meeting on site with the Principal's Representative and BAC Stakeholders;
 - iii. All defects are to be closed out to the satisfaction of the Principal's Representative and BAC Stakeholders prior to the release of any securities held by the Principal.
 - iv.

4.18.2. Maintenance

- a. As a condition precedent to Practical Completion, the Contractor must:
 - i. Provide the building cause and effect fire matrix;
 - ii. Provide the building fire door register;
 - iii. Provide the building fire penetration register;
 - iv. Undertake a full function fire test in the presence of the BAC Stakeholders and Peer Reviewer
- b. As a condition precedent to Practical Completion, the Contractor must provide the maintenance program / regime to the Principal's Representative and be in a format acceptable to the BAC Stakeholders. The Contractor is to arrange a meeting with the Principal's Representative and the BAC Stakeholder and undertake a presentation of the documentation.
- c. The Contractor is responsible for maintenance of the building, including all plant and equipment for 12 months after Practical Completion.
- d. Maintain soft landscaping for a period of 3 months from the Date of Practical Completion.
- e. BAC Facilities will provide the Contractor with monthly services forms which are to be completed and signed by the Contractor, include all relevant supporting maintenance sheets and be submitted monthly (in the event that a BAC Facilities service form is not provided it does not alleviate the Contractors responsibility for carrying out maintenance and providing evidence each month).
- f. The Contractor is to ensure maintenance obligations, compliance and emphasis on Life / Fire Safety in accordance with AS 1851 Maintenance of Fire Protection Systems and Equipment.
- g. As a condition precedent to Final Completion, the Contractor must provide a folder (hard and soft copy) at the end of the 12 months maintenance period with a copy of all services forms/sheets/reports.
- h. As a condition precedent to Final Completion, the Contractor must provide an annual maintenance

certificate for all fire components of the building at the completion of the 12 months maintenance period.

- i. As a condition precedent to Final Completion, the Contractor must undertake a full function fire test in the presence of the BAC Stakeholders and Peer Reviewer.

4.19. As-Built Surveys & As-Built Drawings

The Contractor must provide as-built (as-constructed) documentation in accordance with the BAC Specification for Drafting, Survey and 'As Built' documentation, comprising or including:

- a. The establishment of drafting standards in accordance with the above document.
- b. progressive as-built surveys are to be provided with 5 days of pouring concrete or installation of building elements.
- c. As-built surveys showing tolerance or variance to the approved design documentation identifying both locations and heights in relation to the Aerodrome Datum.
- d. Any items shown to be outside of acceptable tolerances determined by either BCA, Australian standards or the project brief will need to be identified as non-conformances and rectified accordingly.
- e. The Contractor is to also include survey plans on completion of the works, suitable for lodging to the Titles Office, and to the approval of BAC, including:
 - I. Individual tenancy survey plans for the lease.
 - II. Site survey plan.
 - III. Confirmation of the GLAR for the lease agreement.
 - IV. Appropriate lot no's etc. will be provided by BAC.
- f. The Contractor must ensure all as-built documents have been checked for compliance prior to submission to BAC. Delivery to BAC must be a consolidated group of all disciplines, and in a neat presentable format.
- g. Survey lease plans to also capture car-parking, foyers etc. (master leasing for multi-tenanted buildings).
- h. Final survey plans to include the whole project which must include not only buildings but car parks and all ancillary areas. Survey Lease for all the buildings and secondly a Lease of land excluding the buildings.
- i. BIM models incorporating all building elements as defined in TS-7410. On Contract Award, the Contractor is to meet with BAC Drafting to define a Digital Management Plan (DEMP) to agree all BIM deliverables.
- j. The Documentation Bank Guarantee will not be released until the As Built Drawings / Surveys have been received and approved by BAC Drafting.
- k. Brisbane Airport Corporation Approved Surveyors
 - i. Advanced Surveys Australia Pty Ltd- Grant Walker
 - ii. BJ North – Frank North
 - iii. Exegen – Scott Smith
 - iv. Holovision – Rueben Wilson
 - v. Land Solutions Australia – Lee Hellen
 - vi. Queensland Surveying Solutions – John O'Brien
 - vii. Sunstate Engineering Surveys – Jason Fabia
 - viii. Veris – James Johnstone

- I. As a condition precedent to Practical Completion, the Contractor is to arrange a meeting with the Principal's Project Requirements

Principal's Representative and the BAC Stakeholder and undertake a presentation of the documentation.

m. Submission Procedure:

1. Draft submission:

- i. The Contractor is to submit the following to the Principal's Representative and BAC Stakeholder:
- ii. 1 x Electronic copy of As Builts / Surveys (via Drop Box or USB is acceptable)
- iii. BAC to provide feedback to the Contractor, and Contractor to make corrections
- iv. The Final submission is not to be made until BAC Drafting has approved/accepted all submissions/changes

2. Final submission

- i. The Contractor is to submit the following directly to the Principal's Representative and BAC Stakeholder:
- ii. 3 x Soft copies of the As Builts and Surveys (via USB)
- iii. 1 x Hard copy of the As Builts and Surveys
- iv. Transmittal (Signed confirmation of receipt)

The Architect is to prepare a BIM Management plan for BAC review and approval, to which the project team must comply with.

4.20. Operation and Maintenance Manuals

The Contractor must provide Operation and Maintenance Manuals in accordance with:

- a. BAC Airport Design Guidelines (ADG 900 series).
- b. BAC Airport Design Guidelines (ADG 050).
- c. As a condition precedent to Practical Completion, the Contractor must provide the draft Operation and Maintenance Manuals to the Principal's Representative and be in a format acceptable to the BAC Stakeholders. The Contractor is to arrange a meeting with the Principal's Representative and the BAC Stakeholder and undertake a presentation of the documentation.
- d. Prior to final submission the Contractor is responsible for liaising with BAC Stakeholders for adequate acceptance of the format and content.
- e. Tenancy Handover Manuals must include but not be limited to:
 - i. a hard cover on which must be recorded the tenancy name, the location of the Premises, a description of the Project and the date;
 - ii. sections with applicable documentation for:
 - 1. Contents;
 - 2. Operational and maintenance manuals / instructions;
 - 3. Maintenance schedules;
 - 4. As constructed drawings;
 - iii. divided into separate sections as outlined above.
- f. Manufacturer's advertising literature and/or advertising catalogues will not be acceptable for operation and maintenance instructions but may be included for classification purposes.
- g. Submissions must be via Aconex to the Principal's Representative.

- h. The Documentation Bank Guarantee will not be released until the Operations and Maintenance Manuals have been received and approved by BAC Stakeholders
- i. Submission Procedure
 - 1. Draft submission
 - i. Provide 1 month prior to Practical Completion
 - ii. The Contractor is to submit the following directly to the Principal's Representative:
 - iii. 1 x Electronic copy via Aconex
 - iv. BAC to provide feedback Contractor, and Contractor to make corrections as required
 - v. The Final submission is not to be made until BAC has approved/accepted all submissions/changes
 - 2. Final submission
 - i. The Contractor is to submit the following directly to the Principal's Representative:
 - ii. 1 x Electronic copy via Aconex
 - iii. Transmittal (Signed confirmation of receipt)

4.21. Digital Engineering Deliverables

Digital Delivery is mandated for all BAC infrastructure, commercial and maintenance projects in accordance with Brisbane Airport Corporation's (BAC) suite of Airport Design Guidelines and the Digital Engineering suite of Standards. The aim of Digital Engineering for BAC is to provide a framework that ensures the receipt of reliable digital records of all facilities and assets owned and maintained by the business.

The Contractor must provide As-Constructed Models, Surveys and drawings and other associated outputs derived from the project models in accordance with:

- a. BAC Airport Design Guidelines (ADG 900 series)
- b. BAC Airport Design Guidelines (ADG 050).
- c. BAC LOD and LOI Matrix spreadsheets.
- d. All other processes and guides issued as part of the Digital Engineering standards.

As-Constructed records must accurately represent the site-verified, final constructed form and must contain all elements that will enable future operation and maintenance of the facility.

All Digital Engineering deliverables must clearly represent the scope of each discipline with no duplication of elements across disciplines and include all data as specified under Level of Development (LOD), Level of Information (LOI), Model Tolerances and all other technical requirements outlined in the Digital Engineering Standards.

At the start of every project, the nominated project DE Manager for the Contractor must provide a DEMP which outlines the overall approach to Digital Engineering for the project.

Project Information Models (PIM) are to be submitted to BAC for audit at each milestone in both native and IFC formats, separated by discipline. PIM models must accurately represent the intended final constructed form and must contain all elements that will enable the Contractor to coordinate and construct the project.

All Digital Engineering deliverables will be audited by the Digital Engineering Team at each project milestone (Issue For Construction and As-Constructed stages at a minimum) to ensure compliance with the Digital Engineering Standards and BAC's information requirements.

As Constructed Models and all associated outputs derived from the models are to be submitted for audit at the final Project Completion milestone in both native and IFC formats, separated by discipline. As Constructed Models must accurately represent the site-verified, final constructed form and must contain all elements that will enable future operation and maintenance of the facility.

As Constructed drawings are to be submitted for audit at the final As Constructed milestone in both PDF and CAD formats, separated by discipline. PDF and CAD files must be derived directly from the models and delivered as a separate file for each individual drawing sheet. As Constructed drawings must accurately represent the site-verified, final constructed form and must clearly represent the scope of each discipline and satisfy all other technical requirements in this document.

A detailed site survey is required at the completion of the project. The site survey shall provide a three-dimensional location and attributes for surface features, above and below ground services and utilities. The final survey should only consist of data obtained by physical survey and not contain any design information unless agreed by BAC.

Progressive As-Constructed surveys are to be provided in accordance with the Digital Engineering Standards.

Any items shown to be outside of acceptable tolerances determined by either BCA, Australian standards or the project brief will need to be identified as non-conformances and rectified accordingly.

The Contractor is to also include survey plans on completion of the works, suitable for lodging to the Titles Office, and to the approval of BAC, including:

- a. Individual tenancy survey plans for the lease.
- b. Site survey plan.
- c. Confirmation of the GLAR for the lease agreement.
- d. Appropriate lot no's etc. will be provided by BAC.

Survey lease plans to also capture car-parking, foyers etc. (master leasing for multi-tenanted buildings).

Final survey plans to include the whole project which must include not only buildings but car parks and all ancillary areas. Survey Lease for all the buildings and secondly a Lease of land excluding the buildings.

Surveyors engaged by the Contractor must be selected from the BAC Recommended Surveyor list.

Submissions must be via Aconex to the Principal's Representative.

The Documentation Bank Guarantee will not be released until the Digital Engineering deliverables have been received and approved by BAC Stakeholders.

All Digital Engineering deliverables are to be submitted at each project milestone in the formats specified in the Digital Engineering Standards. The following key milestones apply:

- a. Project Start Up
 1. The Contractor must submit/facilitate:
 - i. A Master Information Delivery Plan in accordance with BAC Airport Design Guidelines (ADG 900 series) which must at a minimum:
 1. Include a list of all DE deliverables for the project;
 2. Specify the format that each deliverable will be submitted in;
 3. Identify who is the responsible author and approver for each deliverable;
 4. Identify dates on which each deliverable will be submitted.
 - ii. A Digital Engineering Management Plan in accordance with BAC Airport Design Guidelines (ADG 900 series).
 - iii. A DE start up meeting with the BAC DE team to confirm content of the Master Information Delivery Plan and Digital Engineering Management Plan.

b. Detailed Design

1. The Contractor must submit:

- i. Project Information Models (PIM) in both native and IFC formats, separated by discipline in accordance with BAC Airport Design Guidelines (ADG 900 series).
- ii. All project related drawings and documentation in both CAD and PDF format, separated by discipline in accordance with BAC Airport Design Guidelines (ADG 900 series).

c. Issue For Construction

1. The Contractor must submit:

- i. Project Information Models (PIM) in both native and IFC formats, separated by discipline in accordance with BAC Airport Design Guidelines (ADG 900 series).
- ii. All project related drawings and documentation in both CAD and PDF format, separated by discipline in accordance with BAC Airport Design Guidelines (ADG 900 series).

d. As Constructed

1. The Contractor must submit:

- i. Project Information Models (PIM) in both native and IFC formats, separated by discipline in accordance with BAC Airport Design Guidelines (ADG 900 series).
- ii. All project related drawings and documentation in both CAD and PDF format, separated by discipline in accordance with BAC Airport Design Guidelines (ADG 900 series).
- iii. Survey information in accordance with BAC Airport Design Guidelines (ADG 900 series).

- 2. A draft submission must be provided 1 month prior to Practical Completion with the final submission of all deliverables to occur at practical completion.

4.22. Keys and Spares

4.22.1. Spares

The Contractor must provide spare materials (as a minimum):

- a. Floor and Wall Tiles (5% for each type/colour of tile)
- b. Ceiling Tiles (1 box per 200m² of floor space containing ceiling tiles).
- c. Unopened paint (5 litres of feature colours and 10 litres of base wall colours – internal and external).
- d. Any other spares as necessary that are applicable to the project and as required in the Architectural Specifications.
- e. Store the spares at a location confirmed by the Principal's Representative
- f. Provide photos and an inventory of quantities.
- g. The Contractor shall arrange delivery to a location on or off site as agreed with BAC.

4.22.2. Keys

The Contractor must provide (as a minimum):

- a. Two (2) separate 'key' boxes (lockable) correctly labelled and appropriately numbered (1no. for BNE Property and 1no. for the BAC Facilities Maintenance Team).

4.23. Warranties and Guarantees

- a. See Table 8 Table of Warranties and Guarantees required by BAC. The delivery of warranties and guarantees are to be in accordance with the Major Works Contract.
- b. As a condition precedent to Practical Completion, the Contractor must provide all original (wet signature) Warranties and Guarantees. The Practical Completion Bank Guarantee will not be released until all Deed of Warranties are received and accepted by BAC.
- c. Procedure:
 - i. The Contractor is to submit the following directly to the Principal
 - ii. Original wet copies of the warranty deeds (hard copy)
 - iii. Schedule of the warranty deed (hard and soft copy)
 - iv. In a folder with individual tabs
 - v. The Principal will review the submissions, if rejected the Contractor will need to make corrections and re-submit accordingly

Table 8 Table of Warranties

Item Description / Element	Warranty Period	Deed or Supplier
Structure & Façade		
Roof sheeting and associated flashings, rainwater goods, gutters, downpipes, cappings etc.	15 years unconditional materials and workmanship	Deed
Metal cladding	15 years unconditional materials and workmanship	Deed
Proprietary external cladding systems	10 years unconditional materials and workmanship	Deed
Structural steel paint finish	10 years unconditional materials and workmanship	Deed
Roof waterproofing (applicable if concrete roof)	20 years unconditional materials and workmanship	Deed
Membrane cladding	10 years unconditional materials and workmanship	Deed
Render and waterproof coating systems	10 years unconditional materials and workmanship	Deed
External sealant including applications	10 years unconditional materials and workmanship	Deed
Aluminium framed windows, screens and doors, including glass, gaskets, auto door mechanisms, frames etc.	15 years unconditional materials and workmanship	Deed
External doors	5 years materials and workmanship	Deed
Finishes		
Waterproofing membrane including application	10 years unconditional materials and workmanship	Deed
Internal sealant including applications	10 years unconditional materials and workmanship	Deed
Painting and decorative coatings (internal and external)	5 years materials and workmanship	Deed
Terrazzo / Natural stone	5 years materials and workmanship	Deed
Floor and wall tiling, and associated grout and adhesives etc.	5 years unconditional materials and workmanship	Deed
Sealers, epoxy coatings etc.	15 years unconditional materials and workmanship	Deed

Ceiling grid, furring channel, steel stud and including all plasterboard linings and cornices	2 years materials and workmanship	Deed
Carpet	5 years materials and workmanship	Deed
Stainless steel finishes and fittings	5 years unconditional materials and workmanship	Deed
Metalwork finishes and fittings	5 years unconditional materials and workmanship	Deed
Louvres, grilles, vents etc.	5 years unconditional materials and workmanship	Deed
Joinery & Fittings		
Joinery and cabinets	5 years materials and workmanship	Deed
Mirrors	5 years materials and workmanship	Deed
Timber doors and frames	2 years materials and workmanship	Deed
Fire doors and frames	2 years materials and workmanship	Deed
Door hardware and lock mechanisms including keying system - Supply (proof of purchase documentation to be included)	25 years materials	Supplier
Door hardware and lock mechanisms including keying system - Installation	2 years workmanship	Deed
Chinaware, tapware and sanitary fittings	7 years materials and workmanship	Deed
Whitegoods - Supply	As supplied by manufacturer	Supplier
Roof safety access system	10 years unconditional materials and workmanship	Deed
Toilet partitions	7 years materials and workmanship	Deed
Services		
Electrical switchboards and distribution boards	10 years unconditional materials and workmanship	Deed
Electrical wiring, light fittings, lightings sensors etc	2 years unconditional materials and workmanship	Deed
Internal LED fittings - Supply	5 years materials (minimum)	Supplier
External LED fittings - Supply	10 years materials	Supplier
Hydraulic services including plant, materials and equipment	5 years unconditional materials and workmanship	Deed
Mechanical services including air conditioning, ventilation, exhaust systems etc.	5 years unconditional materials and workmanship	Deed
Fire (wet and dry fire) services installation including plant, materials and equipment	5 years unconditional materials and workmanship	Deed
Fire diesel pump sets, stormwater pumps and other pumps	5 years unconditional materials and workmanship	Deed
Roller shutters, boom gates, dock levellers etc.	5 years unconditional materials and workmanship	Deed
Landscaping irrigation	1 year materials and workmanship	Deed
Landscaping establishment and maintenance	12 months	Deed



ANNEXURE A – PRINCIPAL’S PROJECT REQUIREMENTS – DOCUMENTS

Annexure A - Principal's Project Requirements- Documents

10-Feb-26



Discipline	Document Type	Reference	Revision	Description	Author
Architectural	Drawing	25021-ARC-XX-01-DR-AR-000010	5	Grid Setout Plan (PDF)	Archipelago
Tenancy Brief & Lease	Brief	Agreement to Sublease 10-02-2026	Redacted Version 10-02-26	Brisbane Airport Agreement to Sublease – Building Lease (redacted)	BAC
Tenancy Brief & Lease	Brief	Building Lease Proposal 19-12-25	Redacted Version 19-12-2025	Building Lease Proposal- Proposed Building 345, The Circuit, Skygate, Brisbane Airport (redacted)	BAC



ANNEXURE B – PRELIMINARY DESIGN DOCUMENTS

The following scheduled information has been provided or will upon request be provided to the Contractor on an 'Information Only' basis. BAC does not warrant or make any representation as to the sufficiency, accuracy or completeness of the information referred to in this Annexure and has provided or made available this information to the Contractor only to assist the Contractor in understanding the underlying design principles that informed the preliminary design.

The Contractor must not rely on the information referred to in this Annexure for any purpose and will have no claim under the contract or otherwise in tort arising from any inaccuracy, ambiguity, incompleteness or inadequacy in this information.

Annexure B- Preliminary Design Documents
10-Feb-26



Document Prefix	Sheet Number	Discipline	Description	Current Version	Responsible Person
J0725-015-005 Rev 0		Environmental	Contaminated Land Investigation (Draft)	0	PSK Environmental
J0725-015-004 Rev2		Environmental	Acid Sulphate Soil Investigation	2	PSK Environmental
SKG26 MDL 020125		Reference	MDL Certificate	2/01/2025	BAC
A/F-25021-SS-PLN-0001		Sustainability - Green Star Pathway	Green Star Buildings Proposed Pathway	8	Ashburner Francis
1978		Traffic	Traffic Impact Assessment	V3	PSA Consulting
051004107		Fire Engineering	Fire Engineering Performance-Based Design Brief	8	Omnii
EE25-0437		Energy Efficiency Services	NCC Section J Report	C	Ashburner Francis
QD987-01F03		Acoustic Engineer	Noise Impact Assessment (NIA)	r0	P Johnson- Renzo Tonin
KDS-Q258339		Building Certifier	Building Code Assessment Report	4	Knisco Development Solutions
KIA-Q258334		Access Assessment	Access Assessment Report	4	Knisco Inclusive Access
SF-25-0614-002		Flood Engineer	Flood Impact Assessment Report (FIA)	1	Northrop
SOW- Lot SKG26		Scope of Works	Communications Scope of Works - Skygate Play Lot SKG26 - B345-346	1	BAC
ARCPLG-25021-AR-SCH-	0001	ARCHITECTURAL	MATERIALS, FIXTURES & FITTINGS SCHEDULE	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000000	ARCHITECTURAL	COVER SHEET	9	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000010	ARCHITECTURAL	BAC GRID SETOUT PLAN	5	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000020	ARCHITECTURAL	PERSPECTIVES	11	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000101	ARCHITECTURAL	SITE PLAN	11	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000111	ARCHITECTURAL	DEMOLITION PLAN	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000200	ARCHITECTURAL	TENANCY PLAN	13	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000201	ARCHITECTURAL	GENERAL ARRANGEMENT - PART A	9	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000202	ARCHITECTURAL	GENERAL ARRANGEMENT - PART B	9	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000203	ARCHITECTURAL	GENERAL ARRANGEMENT - PART A- HIGH LEVEL	4	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000204	ARCHITECTURAL	GENERAL ARRANGEMENT - PART B- HIGH LEVEL	3	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000211	ARCHITECTURAL	WALL TYPE PLAN - PART A	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000212	ARCHITECTURAL	WALL TYPE PLAN - PART B	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000213	ARCHITECTURAL	WALL TYPE PLAN - PART A - HIGH LEVEL	3	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000214	ARCHITECTURAL	WALL TYPE PLAN - PART B - HIGH LEVEL	3	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000221	ARCHITECTURAL	STRUCTURAL SETOUT PLAN - PART A	3	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000222	ARCHITECTURAL	STRUCTURAL SETOUT PLAN - PART B	3	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000241	ARCHITECTURAL	REFLECTED CEILING PLAN - PART A	5	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000242	ARCHITECTURAL	REFLECTED CEILING PLAN - PART B	5	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000251	ARCHITECTURAL	ROOF PLAN - PART A	9	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000252	ARCHITECTURAL	ROOF PLAN - PART B	10	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000301	ARCHITECTURAL	ELEVATIONS 01	10	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000302	ARCHITECTURAL	ELEVATIONS 02	10	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000303	ARCHITECTURAL	ELEVATIONS 03	10	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000401	ARCHITECTURAL	SECTIONS 01	9	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000402	ARCHITECTURAL	SECTIONS 02	3	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000601	ARCHITECTURAL	WALL SECTIONS 01	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000650	ARCHITECTURAL	DETAILS 01	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000800	ARCHITECTURAL	WET AREA PLANS	3	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000801	ARCHITECTURAL	WET AREA PLAN INTERNAL ELEVATIONS - AREA 51	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000803	ARCHITECTURAL	WET AREA PLAN INTERNAL ELEVATIONS - AREA 51	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000811	ARCHITECTURAL	WET AREA PLAN INTERNAL ELEVATIONS - GAME OVER	1	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000820	ARCHITECTURAL	WET AREA DETAILS - TYPICAL SETOUTS	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000950	ARCHITECTURAL	DOOR SCHEDULE - GLAZING	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000951	ARCHITECTURAL	DOOR SCHEDULE	2	ARCHIPELAGO
25021-ARC-XX-01-DR-AR-	000952	ARCHITECTURAL	WINDOW SCHEDULE	2	ARCHIPELAGO
A/F-25021-GL-SPC-	0001	MECHANICAL	Mechanical Services D & C Performance Brief	8	Darren Hilber- Ashburner Francis
25021-ASH-XX-XX-DR-ME-	0101001	MECHANICAL	LOCALITY PLAN, LEGEND & DRAWING LIST	8	Darren Hilber- Ashburner Francis
25021-ASH-XX-XX-DR-ME-	0101100	MECHANICAL	GROUND FLOOR - AIR CONDITIONING AND VENTILATION LAYOUT 1	8	Darren Hilber- Ashburner Francis
25021-ASH-XX-XX-DR-ME-	0101200	MECHANICAL	GROUND FLOOR - AIR CONDITIONING AND VENTILATION LAYOUT 2	8	Darren Hilber- Ashburner Francis
A/F-25021-HY-SPC-	0001	HYDRAULIC	Hydraulic Services D & C Specification Brief	8	PAUL MCKENNA- Ashburner Francis
25021-ASH-XX-XX-DR-HY-	000000	HYDRAULIC	LEGEND, NOTES & LOCALITY PLAN	8	PAUL MCKENNA- Ashburner Francis
25021-ASH-XX-XX-DR-HY-	0101101	HYDRAULIC	GROUND FLOOR DRAINAGE LAYOUT 1	8	PAUL MCKENNA- Ashburner Francis
25021-ASH-XX-XX-DR-HY-	0101102	HYDRAULIC	GROUND FLOOR DRAINAGE LAYOUT 2	8	PAUL MCKENNA- Ashburner Francis
25021-ASH-XX-XX-DR-HY-	0101103	HYDRAULIC	ROOF DRAINAGE LAYOUT 1	8	PAUL MCKENNA- Ashburner Francis
25021-ASH-XX-XX-DR-HY-	0101104	HYDRAULIC	ROOF DRAINAGE LAYOUT 2	8	PAUL MCKENNA- Ashburner Francis
25021-ASH-XX-XX-DR-HY-	0101201	HYDRAULIC	GROUND FLOOR WATER LAYOUT 1	8	PAUL MCKENNA- Ashburner Francis
25021-ASH-XX-XX-DR-HY-	0101202	HYDRAULIC	GROUND FLOOR WATER LAYOUT 2	8	PAUL MCKENNA- Ashburner Francis
25021-ASH-XX-XX-DR-HY-	0101203	HYDRAULIC	GROUND FLOOR WATER INSETS - SHEET 1 OF 2	8	PAUL MCKENNA- Ashburner Francis
25021-ASH-XX-XX-DR-HY-	0101204	HYDRAULIC	GROUND FLOOR WATER INSETS - SHEET 2 OF 2	8	PAUL MCKENNA- Ashburner Francis
A/F-25021-EL-SPC-	0001	ELECTRICAL	Electrical Services D & C Specification Brief	8	Dale Enright- Ashburner Francis
25021-ASH-XX-XX-DR-EL-	0101001	ELECTRICAL	LEGEND, LOCALITY PLAN & DRAWING LIST	8	Dale Enright- Ashburner Francis
25021-ASH-XX-XX-DR-EL-	0101002	ELECTRICAL	SITE PLAN	8	Dale Enright- Ashburner Francis
25021-ASH-XX-XX-DR-EL-	0101003	ELECTRICAL	SCHEMATICS	8	Dale Enright- Ashburner Francis
25021-ASH-XX-XX-DR-EL-	0101100	ELECTRICAL	AREA 51 LIGHTING LAYOUT	8	Dale Enright- Ashburner Francis
25021-ASH-XX-XX-DR-EL-	0101101	ELECTRICAL	AREA 51 POWER LAYOUT	8	Dale Enright- Ashburner Francis
25021-ASH-XX-XX-DR-EL-	0101200	ELECTRICAL	GAME OVER LIGHTING LAYOUT	8	Dale Enright- Ashburner Francis
25021-ASH-XX-XX-DR-EL-	0101201	ELECTRICAL	GAME OVER POWER LAYOUT	8	Dale Enright- Ashburner Francis
A/F-25021-FR-SPC-	0001	WET & DRY FIRE	Fire Sprinkler Protection & Dry Fire Services	8	Dale Enright- Ashburner Francis
25021-ASH-XX-XX-DR-FR-	0000001	WET & DRY FIRE	LEGEND, SCHEMATIC, LOCALITY PLAN & DRAWING LIST	8	Dale Enright- Ashburner Francis
25021-ASH-XX-XX-DR-FR-	0101100	WET & DRY FIRE	FIRE PROTECTION LAYOUT	8	Dale Enright- Ashburner Francis
25021-NRP-XX-01-DR-ST	0000001	STRUCTURAL	STRUCTURAL SPECIFICATIONS SHEET 1	D	Nathan Solley- Northrop
25021-NRP-XX-01-DR-ST	0000002	STRUCTURAL	STRUCTURAL SPECIFICATIONS SHEET 2	D	Nathan Solley- Northrop
25021-NRP-XX-01-DR-ST	0000003	STRUCTURAL	FOOTING PLAN	D	Nathan Solley- Northrop
25021-NRP-XX-01-DR-ST	0000004	STRUCTURAL	SLAB LOADING PLAN	D	Nathan Solley- Northrop
25021-NRP-XX-01-DR-ST	0000005	STRUCTURAL	ROOF LOADING PLAN	D	Nathan Solley- Northrop
25021-NRP-XX-01-DR-ST	0000006	STRUCTURAL	ROOF FRAMING PLAN	D	Nathan Solley- Northrop
25021-NRP-XX-01-DR-ST	0000007	STRUCTURAL	PORTAL FRAME ELEVATIONS SHEET 1	D	Nathan Solley- Northrop
25021-NRP-XX-01-DR-ST	0000008	STRUCTURAL	PORTAL FRAME ELEVATIONS SHEET 2	D	Nathan Solley- Northrop
25021-NRP-XX-01-DR-ST	0000009	STRUCTURAL	PURLIN PLAN	D	Nathan Solley- Northrop
25021-NRP-XX-XX-DR-CI	000001	CIVIL	COVER SHEET, LOCALITY PLAN AND DRAWING SCHEDULE	D	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000002	CIVIL	HAZARD SHEET	D	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000010	CIVIL	CIVIL SPECIFICATION NOTES - SHEET 1 OF 3	D	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000011	CIVIL	CIVIL SPECIFICATION NOTES - SHEET 2 OF 3	D	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000012	CIVIL	CIVIL SPECIFICATION NOTES - SHEET 3 OF 3	D	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000020	CIVIL	EXISTING FEATURES LAYOUT PLAN	C	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000101	CIVIL	BULK EARTHWORKS LAYOUT PLAN	E	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000111	CIVIL	BULK EARTHWORKS SECTIONS	C	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000121	CIVIL	EROSION AND SEDIMENT CONTROL LAYOUT PLAN	C	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000131	CIVIL	EROSION AND SEDIMENT CONTROL NOTES AND DETAILS - SHEET 1 OF 3	C	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000132	CIVIL	EROSION AND SEDIMENT CONTROL NOTES AND DETAILS - SHEET 2 OF 3	C	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000133	CIVIL	EROSION AND SEDIMENT CONTROL NOTES AND DETAILS - SHEET 3 OF 3	C	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000211	CIVIL	ROADWORKS & STORMWATER DRAINAGE CONCEPT PLAN - SHEET 1 OF 2	E	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000212	CIVIL	ROADWORKS & STORMWATER DRAINAGE CONCEPT PLAN - SHEET 2 OF 2	D	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000220	CIVIL	TYPICAL SECTION AND DETAILS	D	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000311	CIVIL	STORMWATER DRAINAGE CATCHMENT LAYOUT PLAN	D	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000321	CIVIL	STORMWATER DRAINAGE LONGITUDINAL SECTIONS CONCEPT PLAN	D	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000341	CIVIL	STORMWATER DRAINAGE CALCULATION TABLE	C	Sam Killoran- Northrop
25021-NRP-XX-XX-DR-CI	000351	CIVIL	STORMWATER DRAINAGE DETAILS	C	Sam Killoran- Northrop

ANNEXURE C – INFORMATIVE DOCUMENTS

The following scheduled information has been provided or will upon request be provided to the Contractor on an 'Information Only' basis. BAC does not warrant or make any representation as to the sufficiency, accuracy or completeness of the information referred to in this Annexure and has provided or made available this information to the Contractor only to assist the Contractor in understanding the underlying design principles that informed the preliminary design.

The Contractor must not rely on the information referred to in this Annexure for any purpose and will have no claim under the contract or otherwise in tort arising from any inaccuracy, ambiguity, incompleteness or inadequacy in this information.

Annexure C- Informative Documents

10-Feb-26



Discipline	Document Type	Reference	Revision	Description	Author
Planning	Memorandum	Area 51- Addendum Advice	0	Preliminary Planning Advice	BAC
Reference	Report	NASF	0.1	Assessment: National Airport Safeguarding Framework (NASF)	BAC
Reference	Drawing	BAC/061020/P/01/0001	45	Precinct Lot Plan Skygate	BAC
Reference	Drawing	255595-001	27/06/2025	ASCON Extract for BLDG 346 BNE Play	BAC
Geotechnical	Report	229444.00.R.001.Rev0	0	Report on Geotechnical Investigation	Douglas Partners
Geotechnical	Report	229444.01.R.001.Rev0	0	Report on Additional Geotechnical Investigation	Douglas Partners
Geotechnical	Report	229444.01.R.002.Rev0	0	Addendum Report on Additional Geotechnical Investigation	Douglas Partners
Reference	Notice	CAN18	0.3	Utilities Connection Advice Notice	BAC



ANNEXURE D – SEPERABLE PORTIONS

Skygate Play – Separable Portions (SPs)

1. Separable Portion 1 (SP1) – Area 51 Tenancy

- a) Refer to attached Site plan showing physical extent of SP1 Works.
- b) All work under the Contract necessary to obtain an interim Certificate of Compliance for all SP1 Works (interim CoC).
- c) Completion of all design work required to undertake and complete the Works in order to obtain the interim CoC for SP1 Works and enable the Tenant to commence its lease in accordance with its AtL.
- d) Obtain all Airport Building Controller (ABC) Building Approvals (BAs) required to undertake and complete the Works forming SP1.
- e) Obtain any required Authority Approvals to complete the SP1 Works. These may include Energex, Urban Utilities (UU), Brisbane City Council (BCC) and Aviation Rescue Fire Fighting (ARFF).
- f) Complete any external authority connections, relocations, protection or modifications as required in any Authority Approvals obtained and as required to complete the SP 1 Works.
- g) Undertake infrastructure upgrades as required to obtain the interim CoC for the SP1 Works. These include new HV/LV Pad Mount transformer, Fire Sprinkler tanks, Hydrant Ring Main, Fire Booster Assembly, Stormwater swales and in ground infrastructure.
- h) Complete all structural installations required to obtain the interim CoC for the SP1 Works. These may include in ground piling and footings, slabs, external paving and roads (specifically services road), steel framing, roof, and wall structures.
- i) Complete Civil works required to obtain the interim CoC for the SP1 Works including but not limited to bulk and detailed earthworks, road construction (Service road and carpark), parking, swales, loading docks, stormwater reticulation, drainage, fill import and removal, site remediation, landscaping and bund installation.
- j) Complete all services installations required to obtain the interim CoC for the SP1 Works. These may include Mechanical, Heating Ventilation Air Conditioning (HVAC), Wet and Dry Fire, Emergency Lighting, Electrical (HV & LV), Lighting, Comms, Security (Access Controls and CCTV), Hydraulic.
- k) Complete all external works including but not limited to landscaping, lighting, access controls, paving, roads, line marking, signage and outdoor furniture required to obtain the interim CoC.
- l) Complete all signage including but not limited to statutory, wayfinding and tenancy signage required to obtain the interim CoC for SP1.
- m) Undertake final commissioning including BAC Witness Commissioning, User Acceptance Training (UAT) and any external Authority Witness commissioning that may be required. Final commissioning and testing is to be undertaken and programmed so as to minimise interruptions to the Tenant of SP1. If required, commissioning may need to be completed out of regular working hours.
- n) Provision of As Builts, User Manuals, warranties, design and installation certificates and commissioning results for the SP1 Works as per Contract requirements and to enable the safe use, operation and maintenance of the works.

- o) Defects Liability Period (DLP) and maintenance services for SP1 Works.

2. Separable Portion 2 (SP2) – ‘Game Over’ Tenancy and External Works and all other WUC not forming part of any other Separable Portion

- a) Refer to attached Site plan showing extents of SP2.
- b) Obtain a Final Certificate of Compliance for all of the Works (including the Works forming Separable Portion 1).
- c) Relocation of all site amenities, laydown areas, staff and contractor parking, hoardings, fencing, cranes, plant, construction signage and equipment so as not to disrupt the ongoing operations of SP1 in any way.
- d) After SP1 has achieved Practical Completion, maintain all access to the SP1 Works and surrounding amenities including paving, carpark, landscaping, fire egress, plantrooms, and roads.
- e) Minimise all construction noise, vibration, and dust generation.
- f) Completion of all design work required to undertake and complete the works required to obtain CoC for the SP2 Works and enable the Tenant to commence its lease in accordance with its AtL.
- g) Obtain all Airport Building Controller (ABC) Building Approvals (BAs) required to undertake and complete the works identified in this SP2.
- h) Obtain any required Authority Approvals to complete the works. These may include Energex, Urban Utilities (UU), Brisbane City Council (BCC), Aviation Rescue Fire Fighting (ARFF).
- i) Complete any external authority connections, relocations, protection or modifications as required in any Authority Approvals obtained and as required to complete the SP 2 Works.
- j) Undertake infrastructure upgrades as required to obtain the SP2 interim CoC. These may include but not be limited to; new HV/LV transformer, Fire Sprinkler tanks, Hydrant Ring main, Stormwater swales and in ground infrastructure.
- k) Complete all structural installations required to obtain the SP2 interim CoC. These may include in ground piling and footings, slabs, external paving and roads, steel framing, roof, and wall structures including cladding and glazing).
- l) Complete all services installations required to obtain the interim SP2 CoC. These may include Mechanical (including Kitchen Exhaust), Heating Ventilation Air Conditioning (HVAC), Wet and Dry Fire, Electrical (HV & LV), Lighting, Comms, Security (Access and CCTV), Hydraulic.
- m) Complete all external works including but not limited to landscaping, lighting, access controls, wayfinding signage, statutory signage, paving, roads, line marking, signage, outdoor furniture required to obtain an interim CoC.
- n) Undertake final commissioning including BAC Witness Commissioning, User Acceptance Training (UAT) and any external Authority Witness Commissioning that may be required. Final commissioning and testing is to be undertaken and programmed so as to minimise interruptions to the tenants of SP1 (Area 51). If required, commissioning may need to be completed out of regular working hours.



- o) Provision of As Builts, User Manuals, warranties, design and installation certificates and commissioning results for the SP2 Works as per Contract requirements and to enable the safe use, operation and maintenance of the works.
- p) Defects Liability Period (DLP) and maintenance services for SP2 Works.
- q) All other work under the Contract not included in any other Separable Portion.

1 2 3 4 5 6 7 8 9 10 11 12

A

B

C

D

E


F

G

H

I

J

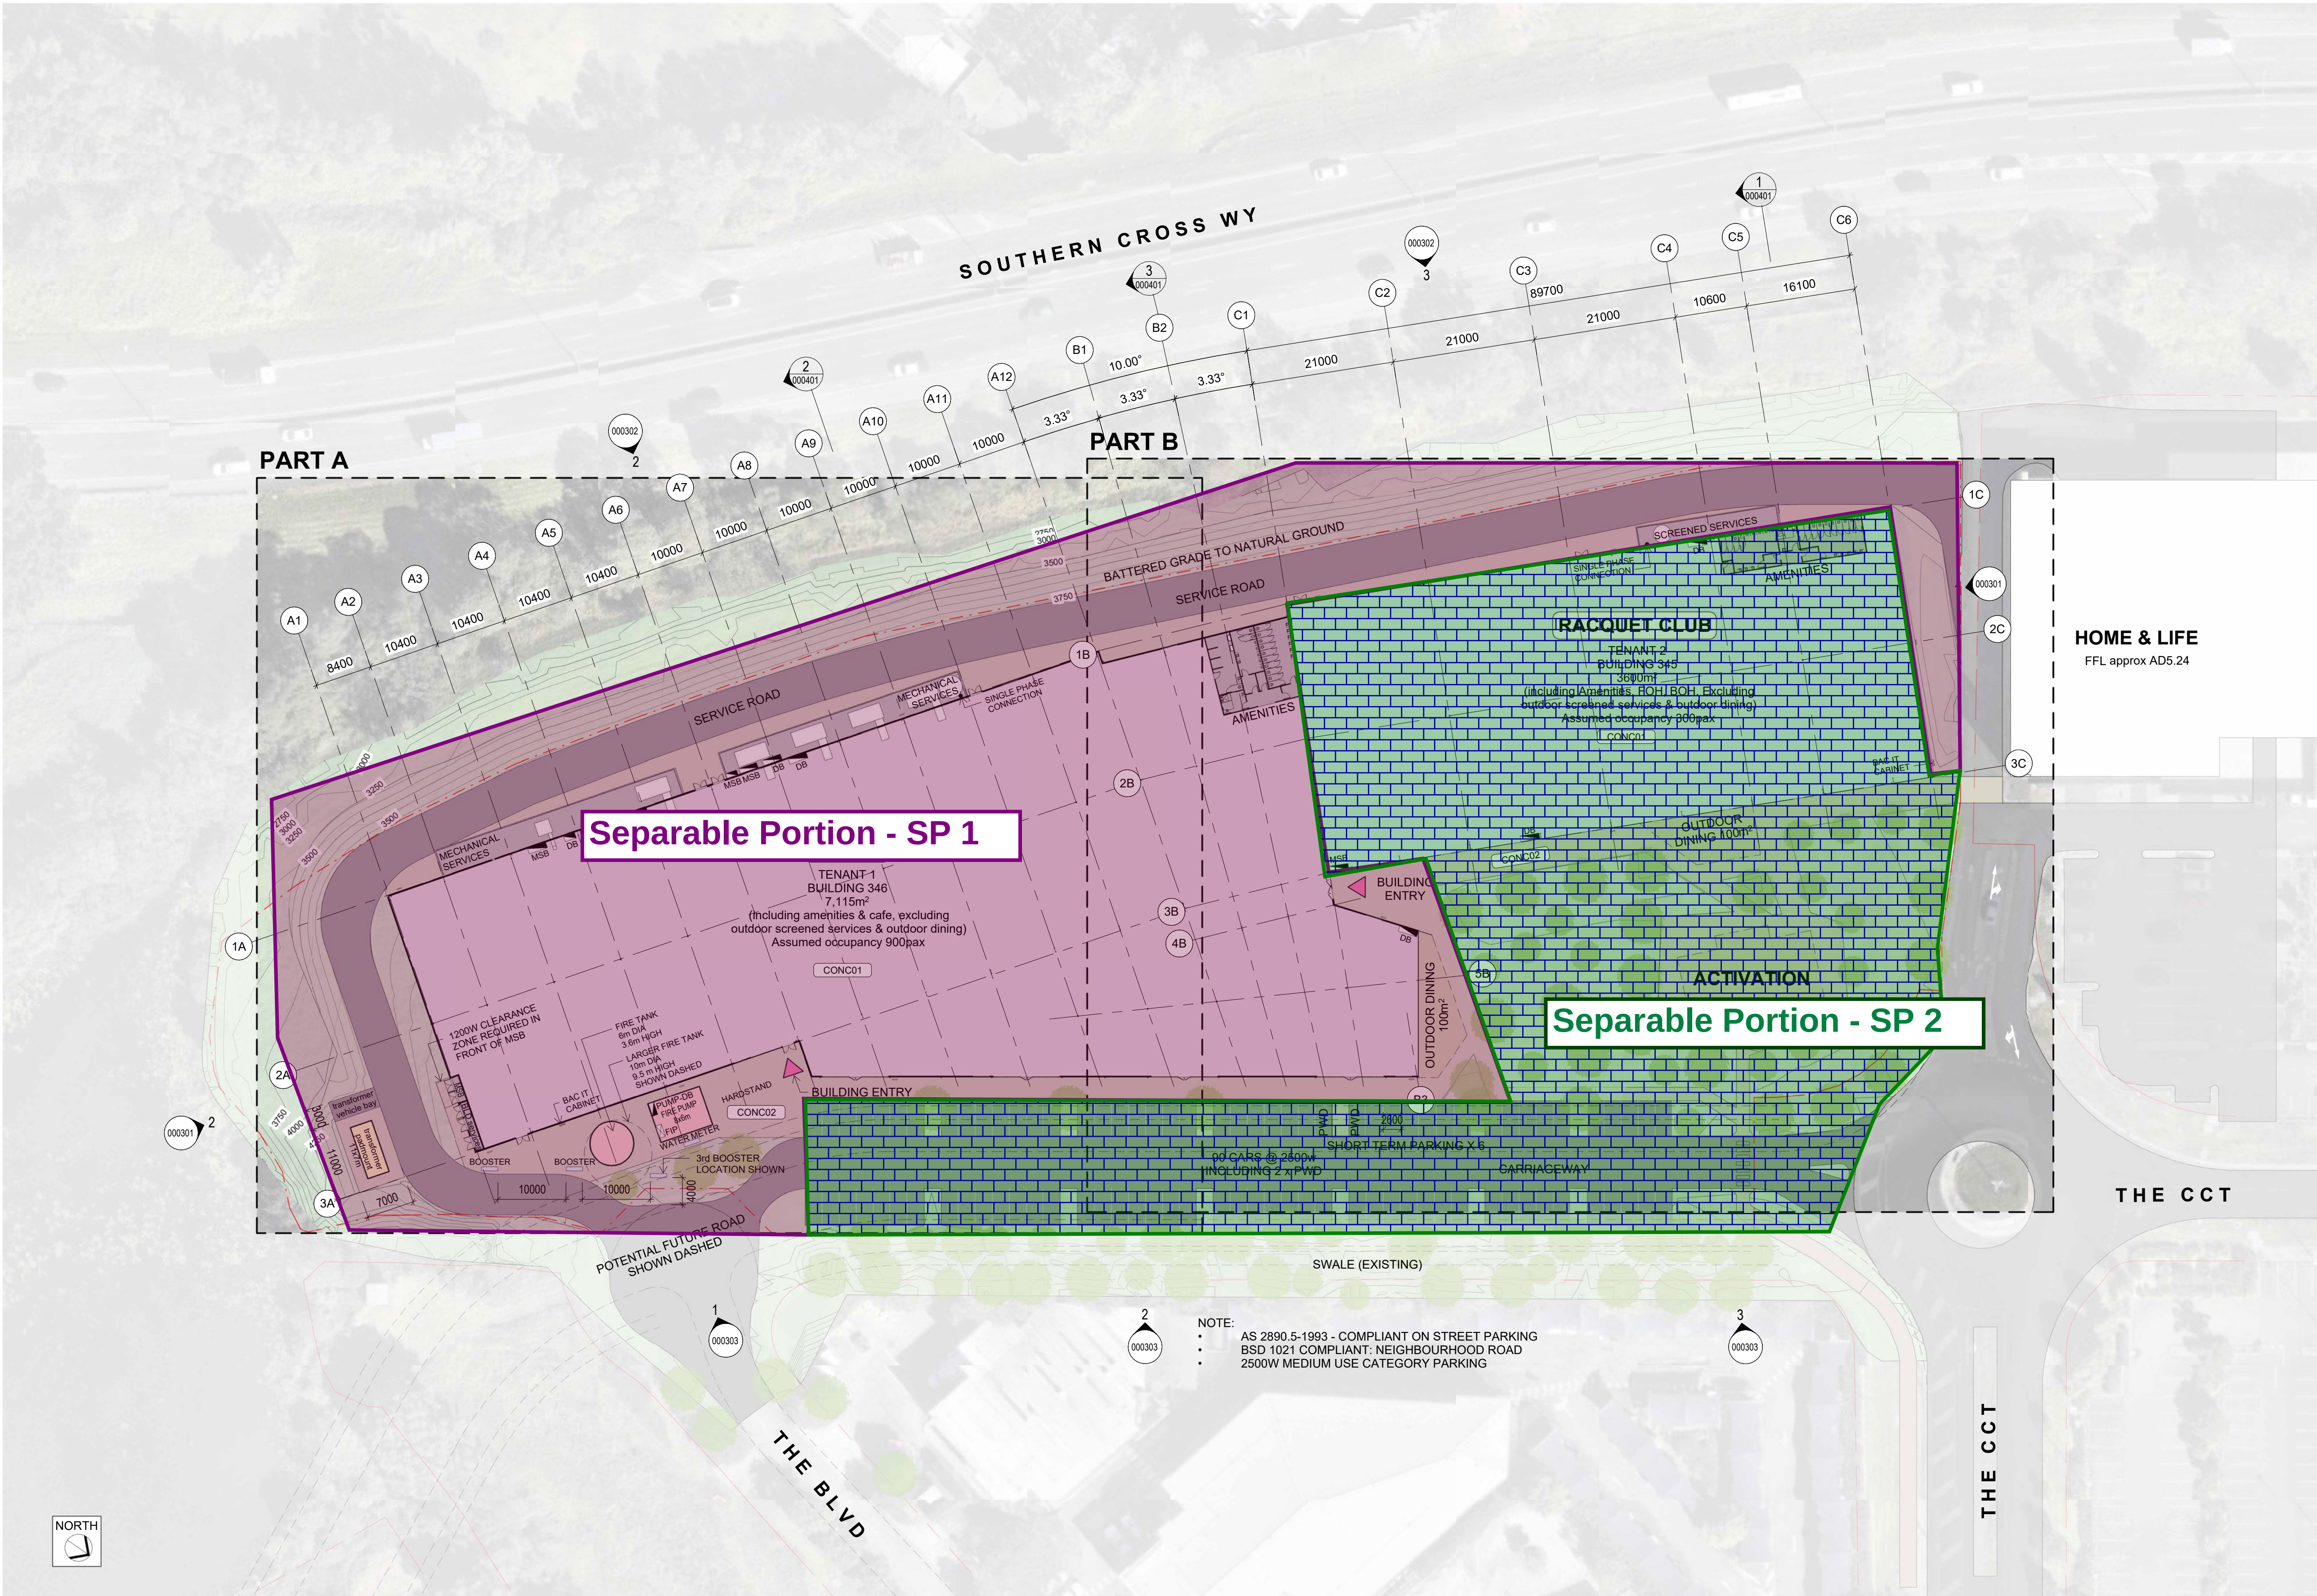

AREA SUMMARY

TENANT 1	
Area 51 (includes amenities & cafe)	7,115m ²
Screened services	300m ²
Outdoor dining	100m ²
TENANT 2	
RACQUET CLUB (includes amenities)	3,600m ²
Screened services	65m ²
Outdoor dining	100m ²

Note: Areas measured are inclusive of external walls

PARKING SUMMARY

90 cars @ 2500 wide (includes 2 x PWD & 6 short term parking)

OCCUPANCY SUMMARY

AREA51
AREA51 BRIEF: 900PAX (STAFF INCLUDED)
NCC CLASS 9B

RACQUET CLUB
RACQUET CLUB BRIEF: 300PAX (STAFF INCLUDED)
NCC CLASS 9B

COPYRIGHT:
REPRODUCTION OF WHOLE OR PART OF THIS DOCUMENT
CONSTITUTES AN INFRINGEMENT OF COPYRIGHT. THE
INFORMATION, IDEAS AND CONCEPTS CONTAINED IN THIS
DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF
THIS DOCUMENT IS PROHIBITED FROM DISCLOSING SUCH
INFORMATION IDEAS AND CONCEPTS TO ANY PERSON
WITHOUT THE PRIOR WRITTEN CONSENT OF THE
BRISBANE AIRPORT CORPORATION PTY. LTD.

DRN	AMENDMENTS	DATE	REV
JB	PRELIMINARY WIP ISSUE	25.07.2025	1
DC	WIP TENANCY PLAN	15.08.2025	2
JB	WIP TENANCY PLAN	21.08.2025	3
JB	WIP CONCEPT	22.08.2025	4
JB	QUANTITY SURVEYOR ISSUE	29.08.2025	5
JB	30% DD ISSUE	12.09.2025	6

TAG LEGEND	
COL	COLUMN REFER STR. ENG.
CONC01	CONCRETE SLAB
CONC02	CONCRETE SLAB - EXTERNAL HARDSTAND
DANPALON	DANPALON SINGLE GLAZED TRANSLUCENT CLADDING - REFER TO SECTION J REPORT
DP	DOWNPIPE
FC CLAD	PREFINISHED FC SHEET CLADDING - REFER TO SECTION J REPORT
FH	DOUBLE PILLAR FIRE HYDRANT REFER HYD. ENG.
GLAZING	POWDERCOATED ALUMINIUM FRAMED COMMERCIAL GLAZING
PRE_CONC	PRECAST CONCRETE DADO WALLS
SCREEN	POWDERCOATED ALUMINIUM BATTEN SCREENING

Archipelago

Archipelago
Level 3, 189 George Street, Brisbane QLD 4000
T +617 3236 4806 www.archipelago.com.au
© ARCHIPELAGO ARCHITECTS PTY. LTD. All Rights Reserved
This work is copyright and cannot be reproduced or copied by any means without written permission of Archipelago Architects Pty Ltd. Any
license, express or implied, to use this document for any purpose
whatsoever is restricted to the terms of the agreement between Archipelago Architects P
y Ltd and the instructing party.

SKYGATE PLAY

TENANCY PLAN

Drawn JB	Checked DC
Design Coordinated N/A	Compliance Checked N/A
Authorised For Issue DC	Construction Checked N/A

	Brisbane Airport						Brisbane Airport Corporation Pty Ltd 11 The Circuit Brisbane Airport QLD 4008 PO Box 61 Hamilton QLD 4007 Australia	Scale 1 : 500
							Telephone : 61 7 3406 3000 Facsimile : 61 7 3406 3111 Email : info@bne.com.au www.brisbaneairport.com.au	Size A1
							ABN 54 076 870 650	Revision 6
Project No.	Originator	Volume	Level	Type	Discipline	Number		
Drawing No.	25021	ARC	XX	01	DR	AR	000200	