


LEGEND

- XX.XX----- PROPOSED SURFACE CONTOURS
- XX.XX----- EXISTING SURFACE CONTOURS
- EXISTING PROPERTY BOUNDARY
- W --- EXISTING WATER MAIN
- R --- EXISTING RECYCLED WATER
- S --- EXISTING SEWER PIPE
- RM --- EXISTING SEWER PIPE RISING MAIN
- E-UG --- EXISTING ELECTRICITY (UNDERGROUND)
- SWD --- EXISTING STORMWATER DRAINAGE PIPE CL
- WORKS BOUNDARY

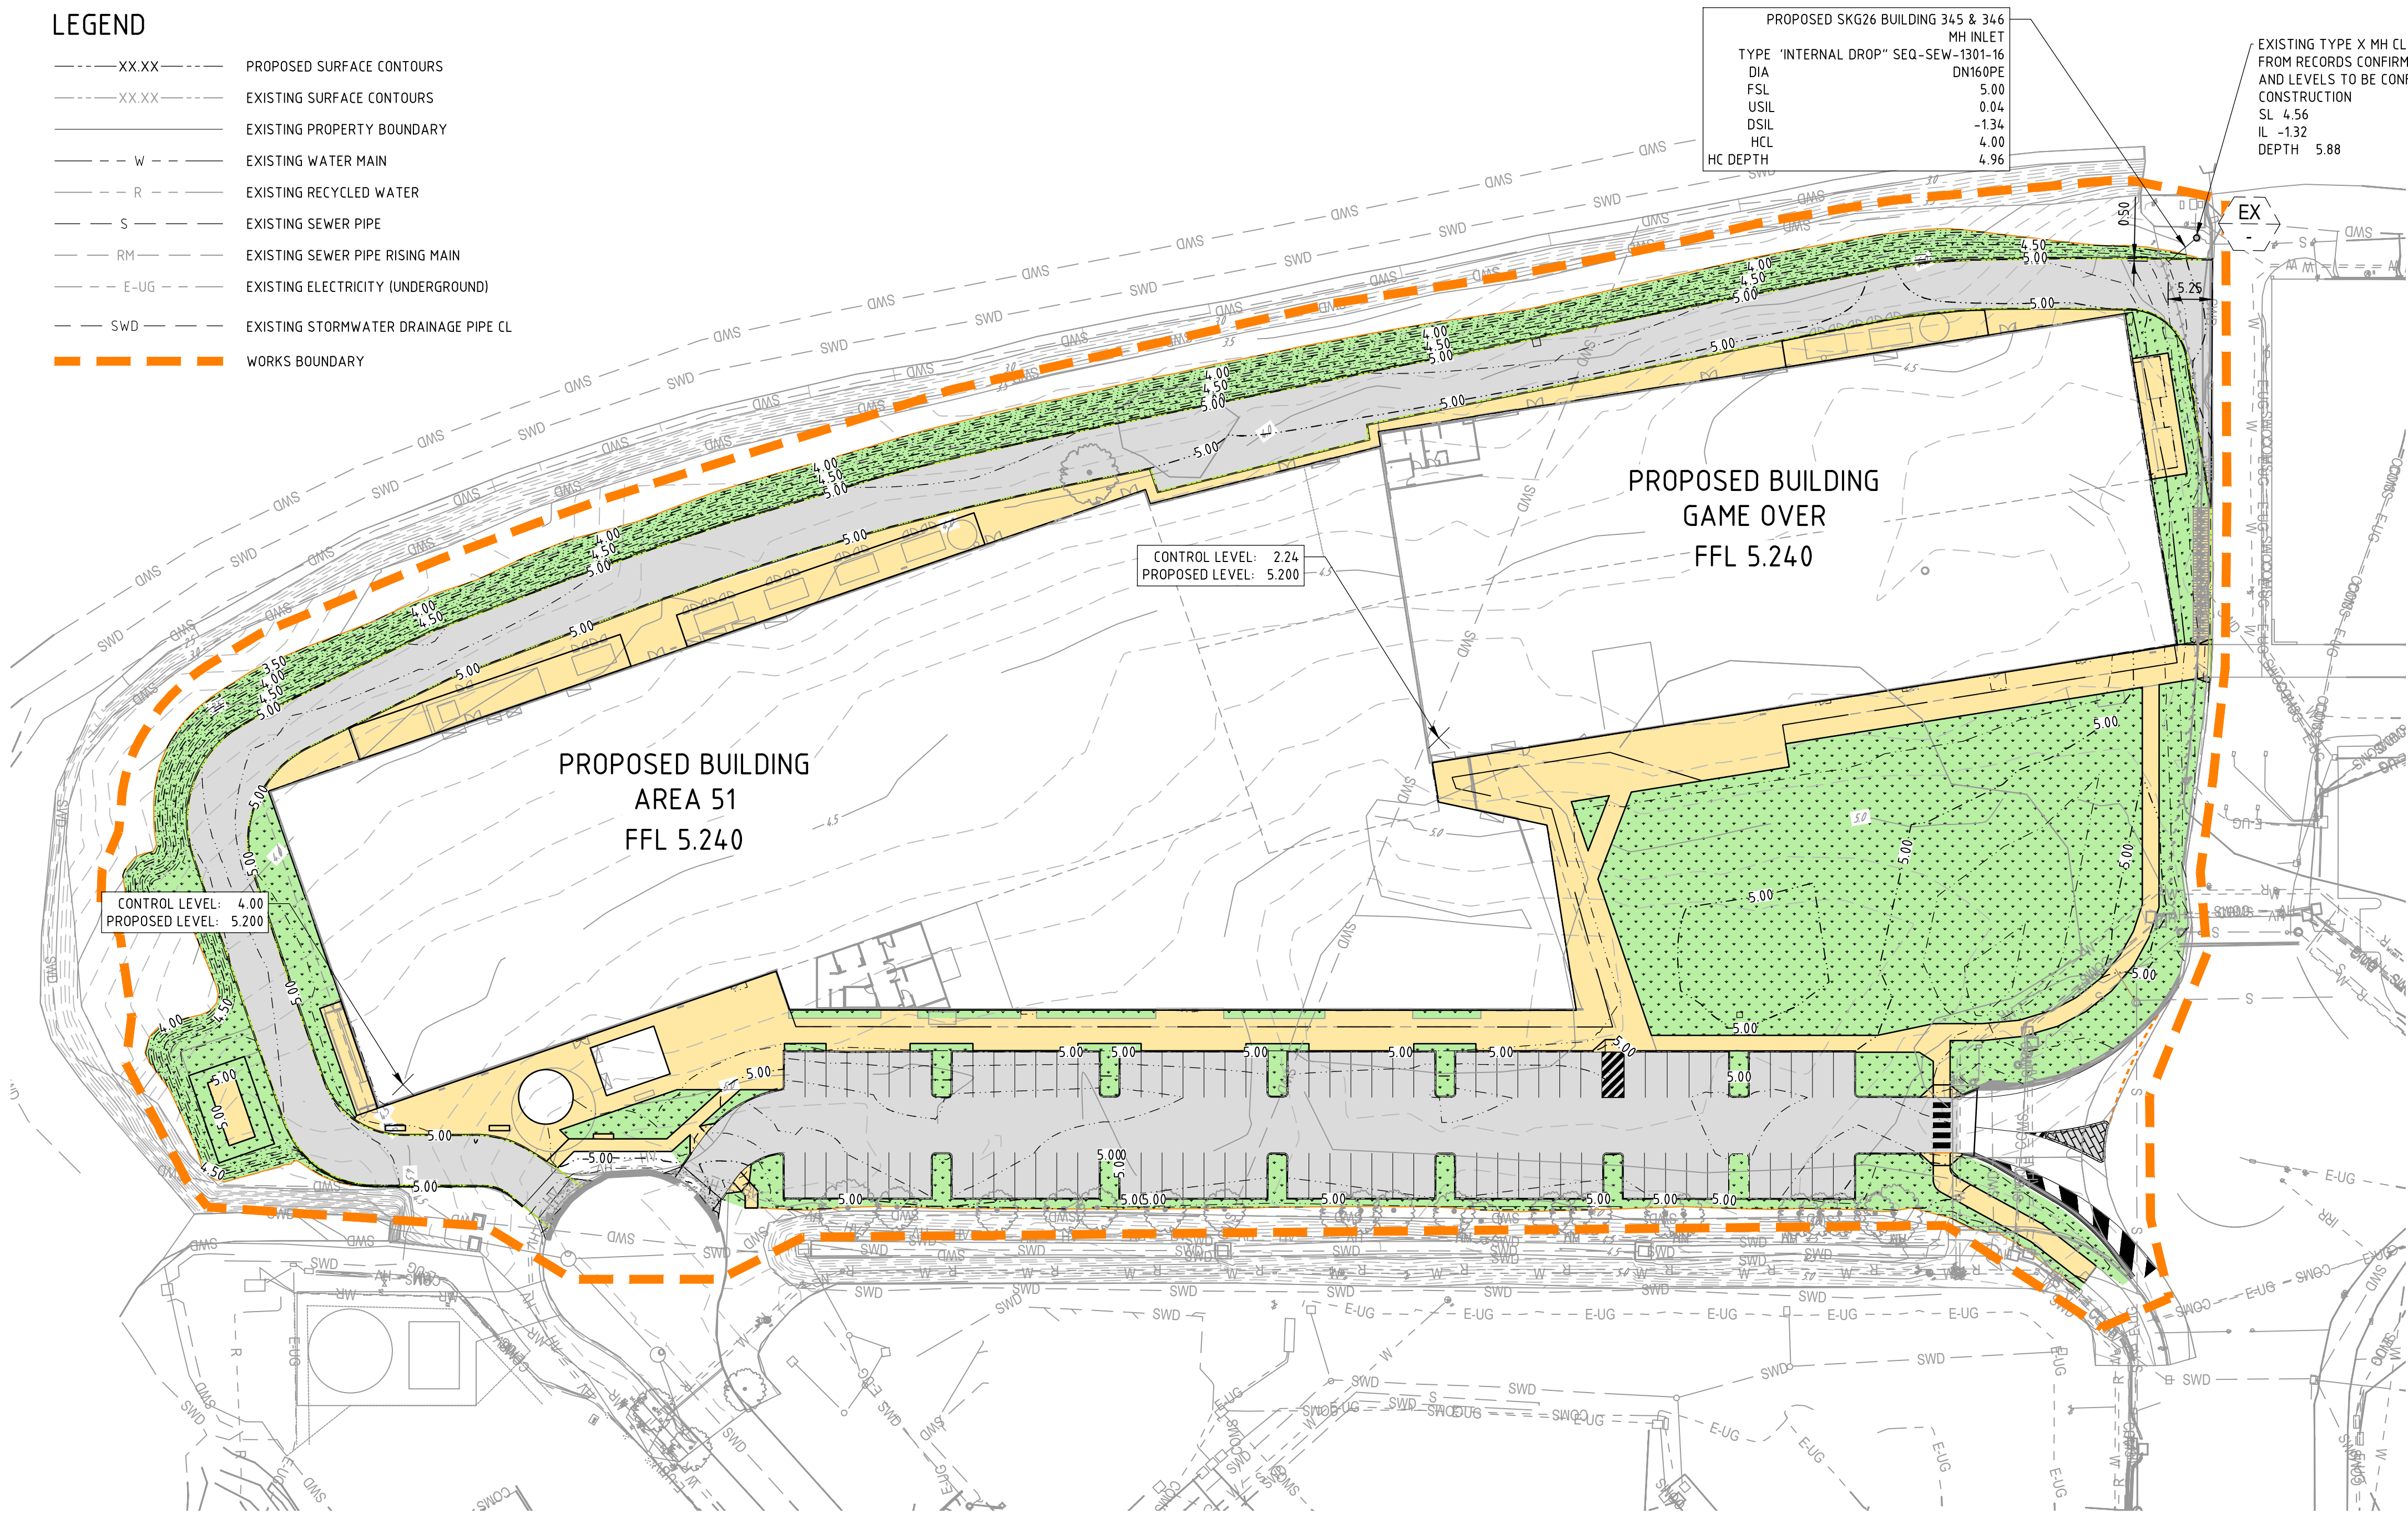

NOTE: SURVEY REQUIRED FOR EXISTING SEWER MAIN AND STRUCTURE AT PROPOSED CONNECTION LOCATION. LEVELS TO BE PROVIDED TO ENGINEER TO CONFIRM PROPOSED CONNECTION DETAILS PRIOR TO CONSTRUCTION.

LAYOUT PLAN  
SCALE 1:500

**WARNING**  
UNDERGROUND SERVICES  
UNDERGROUND SERVICES EXIST IN THIS AREA. UNDERGROUND SERVICE LOCATIONS AND DEPTHS TO BE CONFIRMED PRIOR TO COMMENCEMENT OF CONSTRUCTION WORKS.

ALL WATER AND SEWER CONSTRUCTION SHALL COMPLY WITH THE REQUIREMENTS OF THE QUEENSLAND WORK AND SAFETY ACT 2011. CONTACT THE DIVISION OF WORKPLACE HEALTH AND SAFETY FOR INFORMATION. PH 1300 362 128.

ALL LIVE WORKS TO BE UNDERTAKEN BY THE CONTRACTOR IN ACCORDANCE WITH A VALID NETWORK ACCESS PERMIT UNDER THE SUPERVISION OF URBAN UTILITIES, AT THE DEVELOPER'S EXPENSE.

ALL ENVIRONMENT PROTECTION MEASURES SHALL BE IMPLEMENTED PRIOR TO ANY CONSTRUCTION WORK, INCLUDING CLEARING, COMMENCING.

NOTES

- ALL WORK & MATERIALS SHALL BE IN ACCORDANCE WITH CURRENT SOUTH EAST QUEENSLAND SEWERAGE CODE SPECIFICATIONS & STANDARDS.
- UNLESS SPECIFIED OTHERWISE ALL MATERIALS & WORK SHALL COMPLY WITH THE RELEVANT AUSTRALIAN STANDARDS.
- THE CONSTRUCTION OF THE SEWERAGE WORK SHOWN ON THIS DRAWING SHALL BE SUPERVISED BY AN ENGINEER WHO HAS RPEQ REGISTRATION. SEWERAGE WORKS NOT COMPLYING WITH THIS REQUIREMENT WILL NOT BE PERMITTED TO CONNECT INTO URBAN UTILITIES SEWERAGE SYSTEM.
- ALL WORK ASSOCIATED WITH LIVE SEWERS OR MAINTENANCE HOLES SHALL BE CARRIED OUT BY THE CONTRACTOR AT THE DEVELOPER'S COST.
- ALL PIPES & MATERIALS SHALL COMPLY WITH THE REQUIREMENTS OF THE "ACCEPTED PRODUCTS & MATERIALS" LIST.
- EACH ALLOTMENT SHALL BE SERVED BY A DN110 PE PROPERTY CONNECTION. FOR ALLOTMENTS OTHER THAN SINGLE RESIDENTIAL, A DN160 PE PROPERTY CONNECTION SHALL BE PROVIDED.
- PROPERTY CONNECTIONS SHALL BE LOCATED ON A 1.2m OFFSET FROM PROPERTY BOUNDARY UNLESS NOTED OTHERWISE.
- PROPERTY CONNECTION BRANCHES SHALL EXTEND INTO THE PROPERTY A MINIMUM OF 300MM & A MAXIMUM OF 750MM.
- WHERE PIPES ARE LAID IN FILL, THE FILLING SHALL BE CARRIED OUT IN LAYERS NOT EXCEEDING 300MM (LOOSE) IN DEPTH & SHALL BE COMPACTED UNTIL THE COMPACTION IS NOT LESS THAN 95% OF THE MATERIALS MAXIMUM COMPACTION WHEN TESTED IN ACCORDANCE WITH A.S. 1289 (MODIFIED COMPACTION). TESTING SHALL BE CARRIED OUT AFTER EACH ALTERNATE LAYER. IN ALL SUCH CASES APPROVAL OF CONSTRUCTED SEWERS WILL NOT BE ISSUED BY URBAN UTILITIES UNLESS CERTIFICATES ARE PRODUCED CERTIFYING THAT THE REQUIRED COMPACTION HAS BEEN ACHIEVED.
- WHERE SEWERS HAVE A GRADE OF 1 IN 20 OR STEEPER,BULKHEADS SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE SEQ SEWER CODE
- THE CONTRACTOR SHALL VERIFY THE LOCATION & DEPTH OF EXISTING SERVICES WITH RELEVANT AUTHORITIES BEFORE COMMENCING WORKS.
- SEWERS SHALL BE DISUSED /ABANDONED IN ACCORDANCE WITH PROCEDURES SET OUT IN THE SEQ SEWER CODE.
- BENCH MARK & LEVELS TO AHD.
- EXISTING ALLOTMENTS REQUIRING A PROPERTY CONNECTION FROM EXISTING SEWERS SHALL BE PROVIDED BY URBAN UTILITIES AT THE DEVELOPER'S COST.
- DETECTABLE MARKER TAPE SHALL BE PROVIDED EITHER ABOVE THE EMBEDMENT ZONE OR 1000mm BELOW THE F.S.L., WHICHEVER IS CLOSEST TO F.S.L.
- CONSTRUCT EMBEDMENT AND TRENCHFILL TO SEQ-SEW1200-2, 1201-1 TO 1205-1 (TYPE 4 SUPPORT UNLESS GEOTECHNICAL INVESTIGATIONS DEMONSTRATE THAT TYPE 3 SUPPORT IS ADEQUATE) AND BCC STANDARDS FOR ROAD CROSSING.
- CONSTRUCT BULKHEADS AND TRENCH STOPS TO SEQ-SEW-1206-1 AND TRENCH DRAINS TO SEQ-SEW-1207-1.
- CONSTRUCT MHS TO SEQ-SEW-1301-1, 1301-2 AND -3 (TYPE G), 1301-4 AND -5 (TYPE F), 1301-6, -8, -10, -11 (TYPE X) 1304-1, 1305-1, 1307-4 (STUB CUT-IN), 1313-1 (CONNECTION) AND 1502-1 (INSERT MS).
- INSTALL MH/MS TYPE B COVERS TO SEQ-SEW-1308-2 TO 1308-7.
- INSTALL MH/MS TYPE D COVERS TO SEQ-SEW-1308-8 TO 1308-11.
- CONSTRUCT PROPERTY CONNECTIONS TO SEQ-SEW-1106-1 TO 1106-6.
- ALL WATER AND SEWER CONSTRUCTION SHALL COMPLY WITH THE REQUIREMENTS OF THE QUEENSLAND WORK HEALTH AND SAFETY ACT 2011. CONTACT THE DIVISION OF WORKPLACE HEALTH AND SAFETY FOR INFORMATION. PH 1300 362 128.
- ALL SEWERS AND MAINTENANCE STRUCTURES SHALL BE INSPECTED BY CCTV. THE FIRST CCTV INSPECTION SHALL BE MADE PRIOR TO COMMISSIONING AFTER ALL BACKFILLING OPERATIONS HAVE BEEN SATISFACTORILY COMPLETED AND ALL JUNCTIONS HAVE BEEN INSTALLED. A SECOND CCTV INSPECTION IS REQUIRED PRIOR TO, BUT NOT MORE THAN TWO WEEKS BEFORE, THE ON-SITE INSPECTION FOR "OFF MAINTENANCE" CERTIFICATION. CCTV EQUIPMENT IN ACCORDANCE WITH SECTION 218 OF THE SEQ SEWER CODE AND THE WSAA CONDUIT INSPECTION REPORTING CODE OF AUSTRALIA WSA 05 AND THE RESULTS SUBMITTED TO QUEENSLAND URBAN UTILITIES FOR COMPLIANCE CHECKING.

VEGETATION PROTECTION

- TREES LOCATED ALONG THE FOOTPATH SHALL BE, TRANSPLANTED PRIOR TO CONSTRUCTION, OR REPLACED IF DESTROYED.
- WHEN WORKING WITHIN 4M OF TREES, RUBBER OR HARDWOOD GIRDLES SHALL BE CONSTRUCTED WITH 18M BATTENS CLOSELY SPACED & ARRANGED VERTICALLY FROM GROUND LEVEL. GIRDLES SHALL BE STRAPPED TO TREES PRIOR TO CONSTRUCTION & REMAIN UNTIL COMPLETION.
- TREE ROOTS SHALL BE TUNNELLED UNDER, RATHER THAN SEVERED. IF ROOTS ARE SEVERED THE DAMAGED AREA SHALL BE TREATED WITH A SUITABLE FUNGICIDE. CONTACT RELEVANT COUNCIL ARBORIST FOR FURTHER ADVICE.
- ANY TREE LOPPING REQUIRED SHOULD BE UNDERTAKEN BY AN APPROVED ARBORIST.

SOIL

- TOPSOIL & SUBSOIL SHALL BE STOCKPILED SEPARATELY.
- CARE SHALL BE TAKEN TO PREVENT SEDIMENT FROM ENTERING THE STORMWATER SYSTEM. THIS MAY INVOLVE PLACING APPROPRIATE SEDIMENT CONTROLS AROUND STOCKPILES.

CREEK CROSSINGS

- SILTATION CONTROL MEASURES SHALL BE PLACED DOWNSTREAM OF ANY EXCAVATION WORK.
- APPROPRIATE SEDIMENT CONTROLS SHALL BE USED TO PREVENT SEDIMENT FROM ENTERING THE CREEK.
- NO SOIL SHALL BE STOCKPILED WITHIN 5M OF THE CREEK.

REHABILITATION

- PREDISTURBANCE SOIL PROFILES & COMPACTION LEVELS SHALL BE REINSTATED.
- PREDISTURBANCE VEGETATION PATTERNS SHALL BE RESTORED.

SAFETY

- THE DESIGN & CONSTRUCTION OF THE WORKS SHALL COMPLY WITH ALL QUEENSLAND LEGISLATION.

FOR APPROVAL

