

# Brisbane Airport Agreement to Sublease – Building Lease

## Annexure B

### BAC's Works

(refer to clause 1.2(16) of the Agreement)

*Note: Plans attached in this Annexure B identify the Premises as Area 51, Tenant 1, Building 346 comprising an Estimated Lettable Area of 7,115m<sup>2</sup>*

#### PROJECT OVERVIEW

**Site Location:** SK26, SKYGATE, BRISBANE AIRPORT

The Building Brief must be read in conjunction with the appropriate and relevant Brisbane Airport Corporation (BAC) guidelines and requirements. Specifications nominated within this document must be read in conjunction with the architectural concept plans included as Attachment of this document.

BAC is providing a basic tenancy shell and standard services based on an open plan layout.

The tenant is responsible for the fit out of the tenancy which shall comply with the Agreement to Lease. The Tenant must liaise with the Tenancy Coordinator on all tenancy fit out matters and the Tenancy Coordinator will provide direction on the procedures that must be followed.

The brief has been put together on the following assumptions:

- 1 single new building structure (warehouse structure) including 2 x open plan tenancies separated by a central wall defining the 2 x tenancies.

| Item                                    |                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Lease Area</b>                       | Estimated lettable area of the Premises is <b>7,115m<sup>2</sup></b> , subject to survey using the appropriate method of measurement adopted by the Property Council of Australia.                                                                                                                                             |
| <b>Tenant Permitted Use</b>             | Operation of an indoor kids activity centre including birthday parties, fitness and dance classes, indoor rock climbing, soft play, indoor sports, trampolining, kids parkour and obstacle courses. A limited number of Food & Beverage outlets, office and administration functions trading as Area 51.                       |
| <b>Tenant Early Access Requirements</b> | The Tenant shall be granted access by way of a licence agreement for integrated fit-out works. The access period will be determined in consultation with the builder once appointed. Access will be provided at no cost during this period. Early Access will be provided at least six (6) weeks prior to Practical Completion |

#### MAIN BUILDING

BAC is providing a basic tenancy shell and standard services based on an open plan layout of the tenancy as described in the Lease Proposal.

The tenant is responsible for the fit out of the tenancy which shall comply with the Agreement to Lease. The Tenant must liaise with the Tenancy Coordinator on all tenancy fit out matters and the Tenancy Coordinator will provide direction on the procedures that must be followed.

# Brisbane Airport Agreement to Sublease – Building Lease

| Item                                     | <b>Landlord Works / Base Build</b><br><b>The following works will be undertaken as BAC's works at BAC cost</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>External Walls and Cladding</b>       | <ul style="list-style-type: none"> <li>• Coloured (standard Colorbond colours) steel sheeting complete with all necessary head and sill flashings and fixings, above paint finished concrete dado wall construction</li> <li>• External concrete walls to be a mixture of a painted compressed fibre cement, Colorbond metal or painted precast concrete to suit architectural design intent - To be confirmed.</li> <li>• Sun shading &amp; windows to comply with Section J of the NCC.</li> <li>• All walls and windows to be designed to comply with the requirements stipulated by the acoustic engineer</li> </ul>                                                                                                                                                          |
| <b>Shopfront / Main Entry Door</b>       | <ul style="list-style-type: none"> <li>• All walls and windows to be designed to comply with the requirements stipulated by the acoustic engineer. No Recessed entry mat included</li> <li>• In line with the concept plans, glazed automatic sliding doors to front entry with finish to be powder coated aluminium frame or clear anodised</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Internal Floor Slabs &amp; Finish</b> | <ul style="list-style-type: none"> <li>• The concrete slab to the warehouse shall be designed for a 7.5kPa design live load capacity with burnished finish.</li> <li>• Floor level tolerances to adhere to the NCC &amp; relevant AS for the stipulated building type.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Roof</b>                              | <ul style="list-style-type: none"> <li>• Colorbond metal deck roof sheeting with concealed fixings laid over foil backed fibreglass blanket insulation and safety mesh</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Ceiling</b>                           | <ul style="list-style-type: none"> <li>• Springing height of 9.7m.</li> <li>• Front area ~6m Max.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Intertenancy Wall</b>                 | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Structural Steel</b>                  | <ul style="list-style-type: none"> <li>• Phosphate primer on power wire brush finish to steelwork</li> <li>• External steelwork to be Hot Dipped Galvanised.</li> <li>• Springing height clear to knee of portal frame is 9.7m</li> <li>• Internal Column Layout - cost effective.</li> <li>• Roof design live load for the general area will be 0.25kPa (the heavy plants up to 1.3t must be on the steel frame beams), and 0.5kPa for the snow world area due to many additional plants on the roof and under the ceiling, assuming plant deck can be used to redistribute the roof plant loading.</li> <li>• Secondary steel provision - cold-formed roof purlins, wall girts, ceiling structural C sections.</li> <li>• Structural steel yield stress min. 350MPa.</li> </ul> |
| <b>External Doors</b>                    | <ul style="list-style-type: none"> <li>• External exit doors sized to comply with BCA requirements.</li> <li>• Location of exit doors in accordance with BCA egress requirements</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

# Brisbane Airport Agreement to Sublease – Building Lease

|                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Loading Docks</b>       | <ul style="list-style-type: none"> <li>• On-grade loading dock/s</li> <li>• Automatic powder coated roller shutter doors as per locations shown on Concept Plans.</li> <li>• Bollard protection to all openings (2 x external and 2 x internal)</li> <li>• Bollards to be 219mm steel, painted and filled with concrete</li> <li>• Bollards shall also be provided to all down pipes, electrical switchboards, where exposed to trafficable areas, warehouse exit doors externally</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Electrical Services</b> | <ul style="list-style-type: none"> <li>• Electrical load limitations are 1,400 Amp</li> <li>• Minimum supply of 110 - 130 W /m<sup>3</sup>, 3 - phase power.</li> <li>• Main switchboard installed</li> <li>• Base building power distribution per the Concept Plans (Qty).</li> <li>• Exit and Emergency Lights shall comply with the requirements of the BCA and relevant Australian Standards to an open plan layout</li> <li>• Must comply with AS/NZS</li> <li>• 1 No. 3 phase DGPO adjacent to Distribution Board/s</li> <li>• 1 x 10amp DGPO every 30 l/m of perimeter wall</li> <li>• 100amp 3 phase GPO to kitchen (on a perimeter wall or in a underground conduit to a floor box depending on kitchen location).</li> <li>• Mechanical Services Switchboard</li> <li>• Lighting to provide 320 LUX to 1m above the finished floor level</li> </ul>                                                                                                                        |
| <b>Mechanical Services</b> | <ul style="list-style-type: none"> <li>• Structural provisions and discharge point only for base build mechanical and hydraulic services (plant spaces, risers, penetrations)</li> <li>• Must comply with AS for future ventilation systems</li> <li>• Central plant equipment installed</li> <li>• Main trunk lines and risers</li> <li>• Basic air distribution system</li> <li>• HVAC systems sized to meet tenant's operational cooling loads and achieve 21-24 degree internal temperature range.</li> <li>• Ductwork, air diffusers, and return air grilles</li> <li>• Toilet exhaust systems with appropriate discharge points</li> <li>• MSSB and associated cabling</li> <li>• All slab scanning and structural penetrations to be completed by the landlord</li> <li>• Landlord to provide the following air conditioning and mechanical ventilation capacity as minimum base build cooling load: 120 W/m<sup>2</sup> Kitchen exhaust and make up air: 2000 L/s</li> </ul> |
| <b>Plumbing Services</b>   | <ul style="list-style-type: none"> <li>• Main water supply points</li> <li>• Basic stormwater system</li> <li>• Compliant with AS/NZS</li> <li>• No internal reticulation</li> <li>• Hose taps installed to perimeter of building in accordance with BAC guidelines for cleaning and maintenance.</li> <li>• Trade waste connection point with floor waste</li> <li>• Sanitary drainage connection point</li> <li>• Individual water meters</li> <li>• Minimum 5,000 L Grease trap to be installed in accordance with local water authority requirements</li> <li>• Water supply to outdoor plant area : 4.5L/s @ 2.5m/s</li> </ul>                                                                                                                                                                                                                                                                                                                                                  |

# Brisbane Airport Agreement to Sublease – Building Lease

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Fire Protection Services</b>             | <p>All work shall be carried out in accordance with the following codes, standards and regulations:</p> <ul style="list-style-type: none"> <li>• Australian Standards</li> <li>• BCA</li> <li>• Airport Rescue &amp; Fire Fighting (ARFF)</li> <li>• Fire Sprinkler shall be provided in accordance with the BCA.</li> <li>• Fire wall achieving an FRL 90/90/90 to provide fire separation to adjacent tenancy.</li> <li>• Fire detection and alarm, fire hydrant, fire hose reel and fire extinguishers shall be in accordance with BCA.</li> </ul> |
| <b>Security System &amp; Access Control</b> | Nil Provision                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Communication Services</b>               | <ul style="list-style-type: none"> <li>• Provision of internet and telephone service conduits and fibre lead-in to boundary of tenancy.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>BMS Systems</b>                          | <ul style="list-style-type: none"> <li>• BAC Approved Building Management System (BMS) integration</li> <li>• Core monitoring systems</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Other Special Services</b>               | Nil Provision                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Solar</b>                                | Nil Provision                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Internal Fit out</b>                     | <ul style="list-style-type: none"> <li>• Internal walls to be insulated to extent required to achieve 21-24 degree internal temperature.</li> <li>• Perimeter walls (internal) to be lined with fire rated plasterboard (gyprock).</li> </ul>                                                                                                                                                                                                                                                                                                         |

## AMENITIES

BAC is providing a basic tenancy shell and standard services based on an open plan layout of the tenancy as described in the Lease Proposal.

The tenant is responsible for the fit out of the tenancy which shall comply with the Agreement to Lease. The Tenant must liaise with the Tenancy Coordinator on all tenancy fit out matters and the Tenancy Coordinator will provide direction on the procedures that must be followed.

| <b>Item</b>                                        | <p><b>Landlord Works / Base Build - Cold Shell</b></p> <p><b>The following works will be undertaken as BAC's works at BAC cost</b></p>                     |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>QTY of Amenities</b>                            | <ul style="list-style-type: none"> <li>• To meet BAC and Legislation for Class 9b building for exclusive use of tenancy. Mothers room included.</li> </ul> |
| <b>End of Trip facilities (shower and lockers)</b> | <ul style="list-style-type: none"> <li>• DDA bathroom (incl. shower) to comply with NCC requirements.</li> </ul>                                           |
| <b>Internal Floor Finish</b>                       | <ul style="list-style-type: none"> <li>• Vitrified Tile</li> </ul>                                                                                         |

# Brisbane Airport Agreement to Sublease – Building Lease

|                                 |                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Ceiling type and finish</b>  | <ul style="list-style-type: none"> <li>• Flush set plasterboard ceiling, with paint finish</li> </ul>                                                                                                                                                                                                                                                                                        |
| <b>Wall type and finish</b>     | <ul style="list-style-type: none"> <li>• Painted Fibre Cement, 200mm high tiled skirting, 2100mm high tiled walls to showers, 1000mm high tiled behind urinals and tiled behind the vanities/splashback as shown on the architectural drawings.</li> </ul>                                                                                                                                   |
| <b>Joinery</b>                  | <ul style="list-style-type: none"> <li>• Laminated vanity units with under bench storage, and synthetic stone (or other approved equivalent) benchtops.</li> </ul>                                                                                                                                                                                                                           |
| <b>Fixtures &amp; Fittings</b>  | <ul style="list-style-type: none"> <li>• Sanitaryware and fittings as per the BAC standard schedule.</li> </ul>                                                                                                                                                                                                                                                                              |
| <b>Toilet Partitions</b>        | <ul style="list-style-type: none"> <li>• Toilet partitions to be high-compact laminate (or other approved equivalent). Frameless mirrors with concealed fixings over vanities.</li> </ul>                                                                                                                                                                                                    |
| <b>Electrical Services</b>      | <ul style="list-style-type: none"> <li>• LED auto lighting</li> <li>• All lux levels to be in accordance with the relevant Australian Standards and BCA</li> <li>• Exit and Emergency lights shall comply with the requirements of the BCA and relevant Australian Standards</li> <li>• 2 x DGPOs to each amenity room</li> </ul>                                                            |
| <b>Mechanical Services</b>      | <ul style="list-style-type: none"> <li>• Toilets/amenities/change rooms will be mechanically ventilated in accordance with the relevant Australian Standards.</li> </ul>                                                                                                                                                                                                                     |
| <b>Plumbing Services</b>        | <ul style="list-style-type: none"> <li>• All work to be carried out in accordance with the relevant Australian Standard</li> <li>• Sanitaryware to be provided in accordance with “Brisbane Airport Corporation Sanitaryware Guidelines – Industrial Facilities”</li> <li>• Complete core bathrooms</li> <li>• Main water reticulation</li> <li>• Hot water system infrastructure</li> </ul> |
| <b>Fire Protection Services</b> | <p>All work shall be carried out in accordance with the following codes, standards and regulations:</p> <ul style="list-style-type: none"> <li>• Australian Standards</li> <li>• BCA</li> <li>• Airport Rescue &amp; Fire Fighting (ARFF)</li> </ul> <p>Fire Sprinklers(if required) shall be provided in accordance with the BCA.</p>                                                       |

## EXTERNAL WORKS

BAC is providing a basic tenancy shell and standard services based on an open plan layout of the tenancy as described in the Lease Proposal.

The tenant is responsible for the fit out of the tenancy which shall comply with the Agreement to Lease. The Tenant must liaise with the Tenancy Coordinator on all tenancy fit out matters and the Tenancy Coordinator will provide direction on the procedures that must be followed.

# Brisbane Airport Agreement to Sublease – Building Lease

| Item                       | <b>Landlord Works / Base Build - Cold Shell</b><br><b>The following works will be undertaken as BAC's works at BAC cost</b>                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Car Parking</b>         | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Bike storage</b>        | <ul style="list-style-type: none"> <li>• Bike storage to comply with BAC Planning Guidelines</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Building Signage</b>    | <ul style="list-style-type: none"> <li>• Provision for the main building sign is provided. (power and structural provision) to suit the signage nominated in the BAC Signage Manual</li> </ul>                                                                                                                                                                                                                                                                                                             |
| <b>Pylon Signage</b>       | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Landscape</b>           | <ul style="list-style-type: none"> <li>• All Landscaping works shall be undertaken in accordance with the relevant BAC Guidelines</li> <li>• Soft landscaping shall be provided to the areas indicated on the concept plans</li> <li>• Plants will be a selected range of Australian native, groundcover, shrubs and non-deciduous trees</li> <li>• The defect liability period for the landscaping improvements is 3 months. Following this, BAC takes responsibility of maintaining landscape</li> </ul> |
| <b>Waste</b>               | <ul style="list-style-type: none"> <li>• Provision and waste management to cold shell design</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Line Marking</b>        | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Fencing &amp; Gates</b> | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Pavement</b>            | <ul style="list-style-type: none"> <li>• Concrete apron service lane to rear of building only appropriate for rigid vehicle up to 12.5m in length</li> </ul>                                                                                                                                                                                                                                                                                                                                               |

## GENERAL

BAC is providing a basic tenancy shell and standard services based on an open plan layout of the tenancy as described in the Lease Proposal.

The tenant is responsible for the fit out of the tenancy which shall comply with the Agreement to Lease. The Tenant must liaise with the Tenancy Coordinator on all tenancy fit out matters and the Tenancy Coordinator will provide direction on the procedures that must be followed.

| Item                   | <b>Landlord Works / Base Build - Cold Shell</b><br><b>The following works will be undertaken as BAC's works at BAC cost</b>                                |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Temporary Works</b> | <ul style="list-style-type: none"> <li>• BAC's Contractor is responsible for all temporary works and services during construction of cold shell</li> </ul> |


# Brisbane Airport Agreement to Sublease – Building Lease

|                                                                    |                                                                                                                                                                                                                |
|--------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Defects Liability and Maintenance</b>                           | <ul style="list-style-type: none"> <li>• The defect liability period for the building improvements is 12 months</li> <li>• The defect liability period for the landscaping improvements is 3 months</li> </ul> |
| <b>Dangerous Goods</b>                                             | Nil provision                                                                                                                                                                                                  |
| <b>Livening of Services</b>                                        | <ul style="list-style-type: none"> <li>• Connection to all mains</li> </ul>                                                                                                                                    |
| <b>Fees and charges for authorities, approvals and inspections</b> | <ul style="list-style-type: none"> <li>• BAC's Contractor is responsible for all fees, charges, authorities, approvals and inspections</li> </ul>                                                              |



# Brisbane Airport Agreement to Sublease – Building Lease

PROJECT NO: 25021 - SKG26  
SKYGATE PLAY  
BUILDING NO: 345 & 346

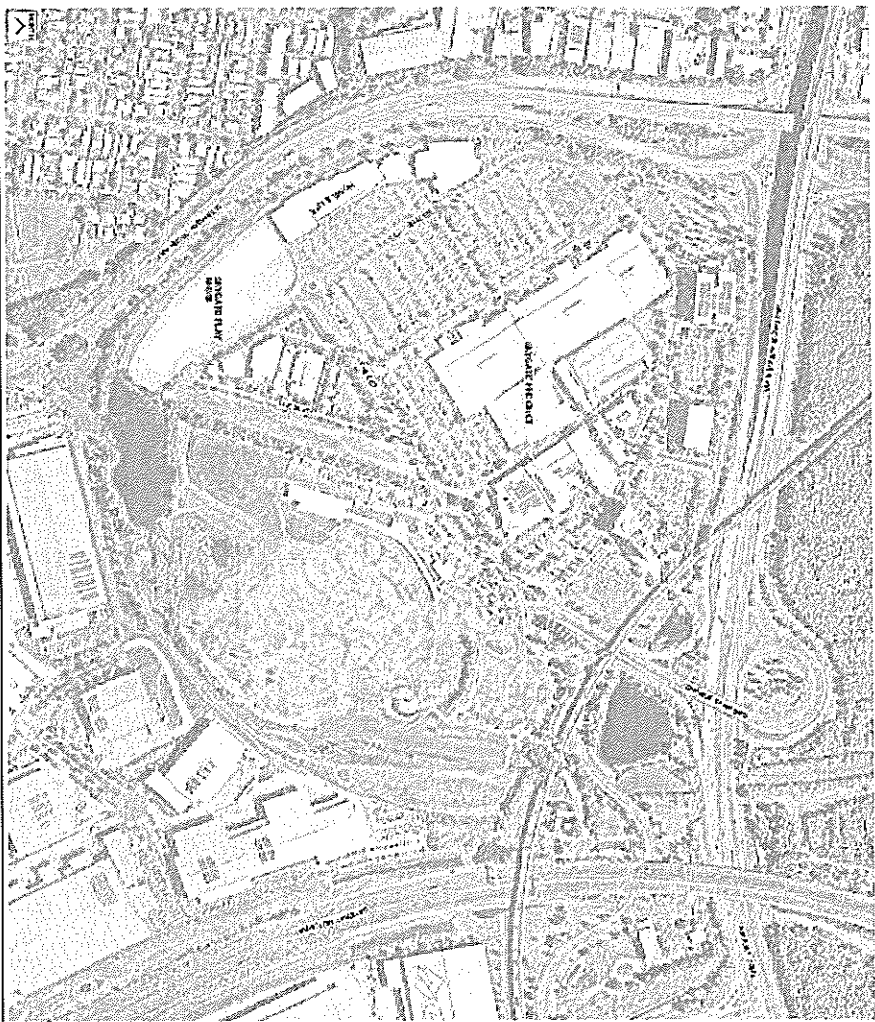



| NO. | DESCRIPTION  | UNIT |
|-----|--------------|------|
| 1   | SKYGATE PLAY | 1    |
| 2   | SKYGATE PLAY | 2    |
| 3   | SKYGATE PLAY | 3    |
| 4   | SKYGATE PLAY | 4    |
| 5   | SKYGATE PLAY | 5    |
| 6   | SKYGATE PLAY | 6    |
| 7   | SKYGATE PLAY | 7    |
| 8   | SKYGATE PLAY | 8    |
| 9   | SKYGATE PLAY | 9    |
| 10  | SKYGATE PLAY | 10   |
| 11  | SKYGATE PLAY | 11   |
| 12  | SKYGATE PLAY | 12   |
| 13  | SKYGATE PLAY | 13   |
| 14  | SKYGATE PLAY | 14   |
| 15  | SKYGATE PLAY | 15   |
| 16  | SKYGATE PLAY | 16   |
| 17  | SKYGATE PLAY | 17   |
| 18  | SKYGATE PLAY | 18   |
| 19  | SKYGATE PLAY | 19   |
| 20  | SKYGATE PLAY | 20   |
| 21  | SKYGATE PLAY | 21   |
| 22  | SKYGATE PLAY | 22   |
| 23  | SKYGATE PLAY | 23   |
| 24  | SKYGATE PLAY | 24   |
| 25  | SKYGATE PLAY | 25   |
| 26  | SKYGATE PLAY | 26   |
| 27  | SKYGATE PLAY | 27   |
| 28  | SKYGATE PLAY | 28   |
| 29  | SKYGATE PLAY | 29   |
| 30  | SKYGATE PLAY | 30   |
| 31  | SKYGATE PLAY | 31   |
| 32  | SKYGATE PLAY | 32   |
| 33  | SKYGATE PLAY | 33   |
| 34  | SKYGATE PLAY | 34   |
| 35  | SKYGATE PLAY | 35   |
| 36  | SKYGATE PLAY | 36   |
| 37  | SKYGATE PLAY | 37   |
| 38  | SKYGATE PLAY | 38   |
| 39  | SKYGATE PLAY | 39   |
| 40  | SKYGATE PLAY | 40   |
| 41  | SKYGATE PLAY | 41   |
| 42  | SKYGATE PLAY | 42   |
| 43  | SKYGATE PLAY | 43   |
| 44  | SKYGATE PLAY | 44   |
| 45  | SKYGATE PLAY | 45   |
| 46  | SKYGATE PLAY | 46   |
| 47  | SKYGATE PLAY | 47   |
| 48  | SKYGATE PLAY | 48   |
| 49  | SKYGATE PLAY | 49   |
| 50  | SKYGATE PLAY | 50   |
| 51  | SKYGATE PLAY | 51   |
| 52  | SKYGATE PLAY | 52   |
| 53  | SKYGATE PLAY | 53   |
| 54  | SKYGATE PLAY | 54   |
| 55  | SKYGATE PLAY | 55   |
| 56  | SKYGATE PLAY | 56   |
| 57  | SKYGATE PLAY | 57   |
| 58  | SKYGATE PLAY | 58   |
| 59  | SKYGATE PLAY | 59   |
| 60  | SKYGATE PLAY | 60   |
| 61  | SKYGATE PLAY | 61   |
| 62  | SKYGATE PLAY | 62   |
| 63  | SKYGATE PLAY | 63   |
| 64  | SKYGATE PLAY | 64   |
| 65  | SKYGATE PLAY | 65   |
| 66  | SKYGATE PLAY | 66   |
| 67  | SKYGATE PLAY | 67   |
| 68  | SKYGATE PLAY | 68   |
| 69  | SKYGATE PLAY | 69   |
| 70  | SKYGATE PLAY | 70   |
| 71  | SKYGATE PLAY | 71   |
| 72  | SKYGATE PLAY | 72   |
| 73  | SKYGATE PLAY | 73   |
| 74  | SKYGATE PLAY | 74   |
| 75  | SKYGATE PLAY | 75   |
| 76  | SKYGATE PLAY | 76   |
| 77  | SKYGATE PLAY | 77   |
| 78  | SKYGATE PLAY | 78   |
| 79  | SKYGATE PLAY | 79   |
| 80  | SKYGATE PLAY | 80   |
| 81  | SKYGATE PLAY | 81   |
| 82  | SKYGATE PLAY | 82   |
| 83  | SKYGATE PLAY | 83   |
| 84  | SKYGATE PLAY | 84   |
| 85  | SKYGATE PLAY | 85   |
| 86  | SKYGATE PLAY | 86   |
| 87  | SKYGATE PLAY | 87   |
| 88  | SKYGATE PLAY | 88   |
| 89  | SKYGATE PLAY | 89   |
| 90  | SKYGATE PLAY | 90   |
| 91  | SKYGATE PLAY | 91   |
| 92  | SKYGATE PLAY | 92   |
| 93  | SKYGATE PLAY | 93   |
| 94  | SKYGATE PLAY | 94   |
| 95  | SKYGATE PLAY | 95   |
| 96  | SKYGATE PLAY | 96   |
| 97  | SKYGATE PLAY | 97   |
| 98  | SKYGATE PLAY | 98   |
| 99  | SKYGATE PLAY | 99   |
| 100 | SKYGATE PLAY | 100  |

|                           |  |
|---------------------------|--|
| <b>Archipelago</b>        |  |
| SKYGATE PLAY              |  |
| BUILDING NO: 345 & 346    |  |
| COMB SHEET                |  |
| DATE: 10/10/2018          |  |
| BY: [Signature]           |  |
| CHECKED BY: [Signature]   |  |
| APPROVED BY: [Signature]  |  |
| PROJECT NO: 25021 - SKG26 |  |
| BUILDING NO: 345 & 346    |  |
| SKYGATE PLAY              |  |
| DATE: 10/10/2018          |  |
| BY: [Signature]           |  |
| CHECKED BY: [Signature]   |  |
| APPROVED BY: [Signature]  |  |




# Brisbane Airport Agreement to Sublease – Building Lease

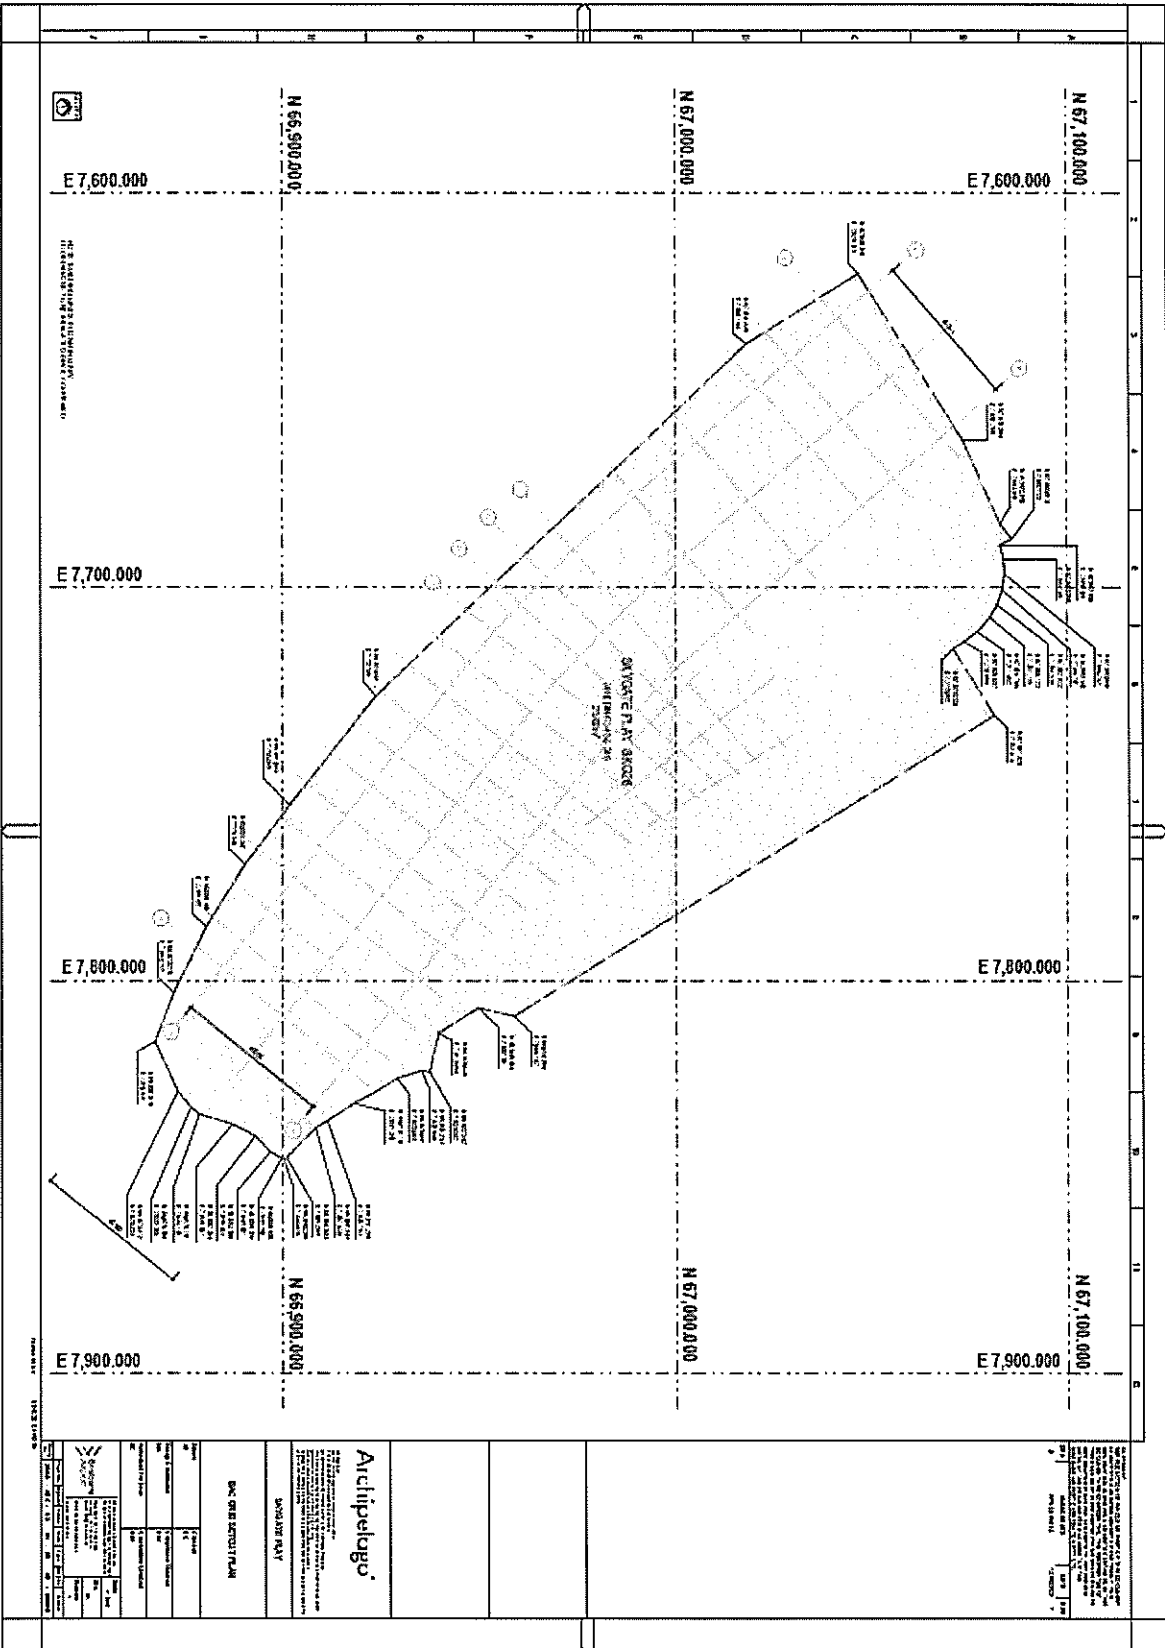


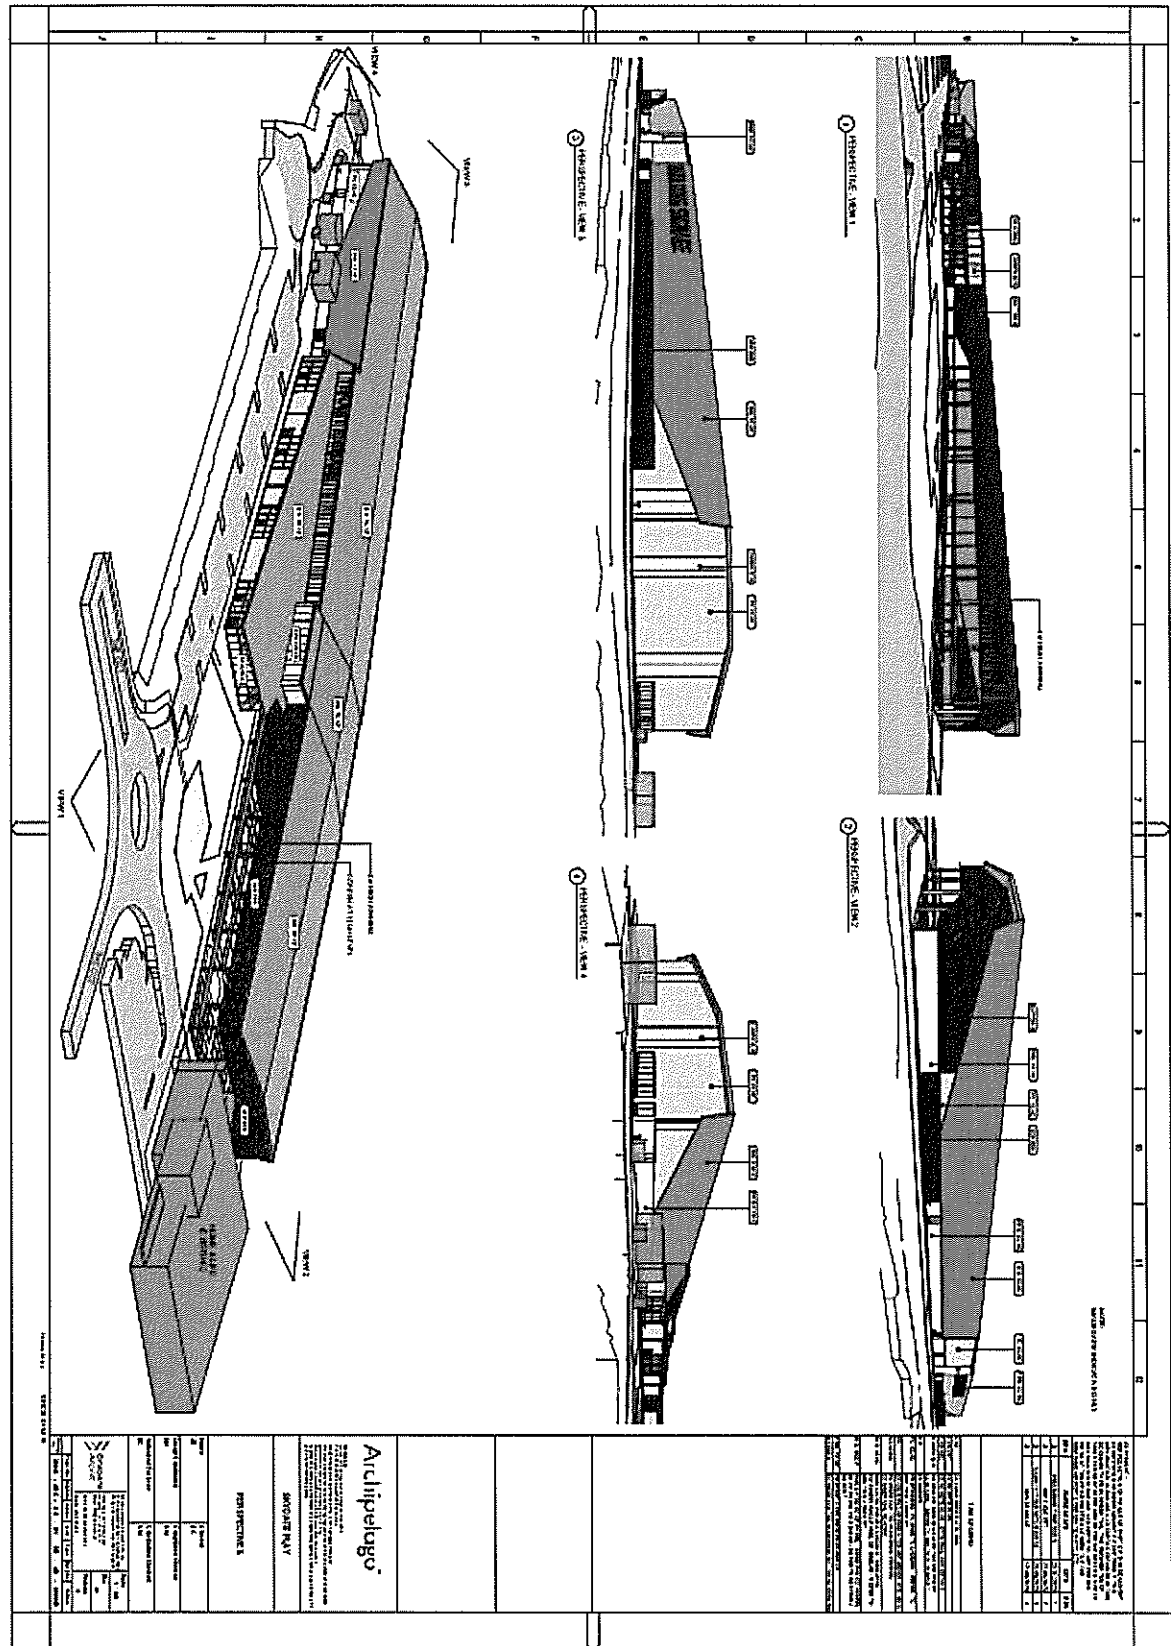

# Brisbane Airport Agreement to Sublease – Building Lease

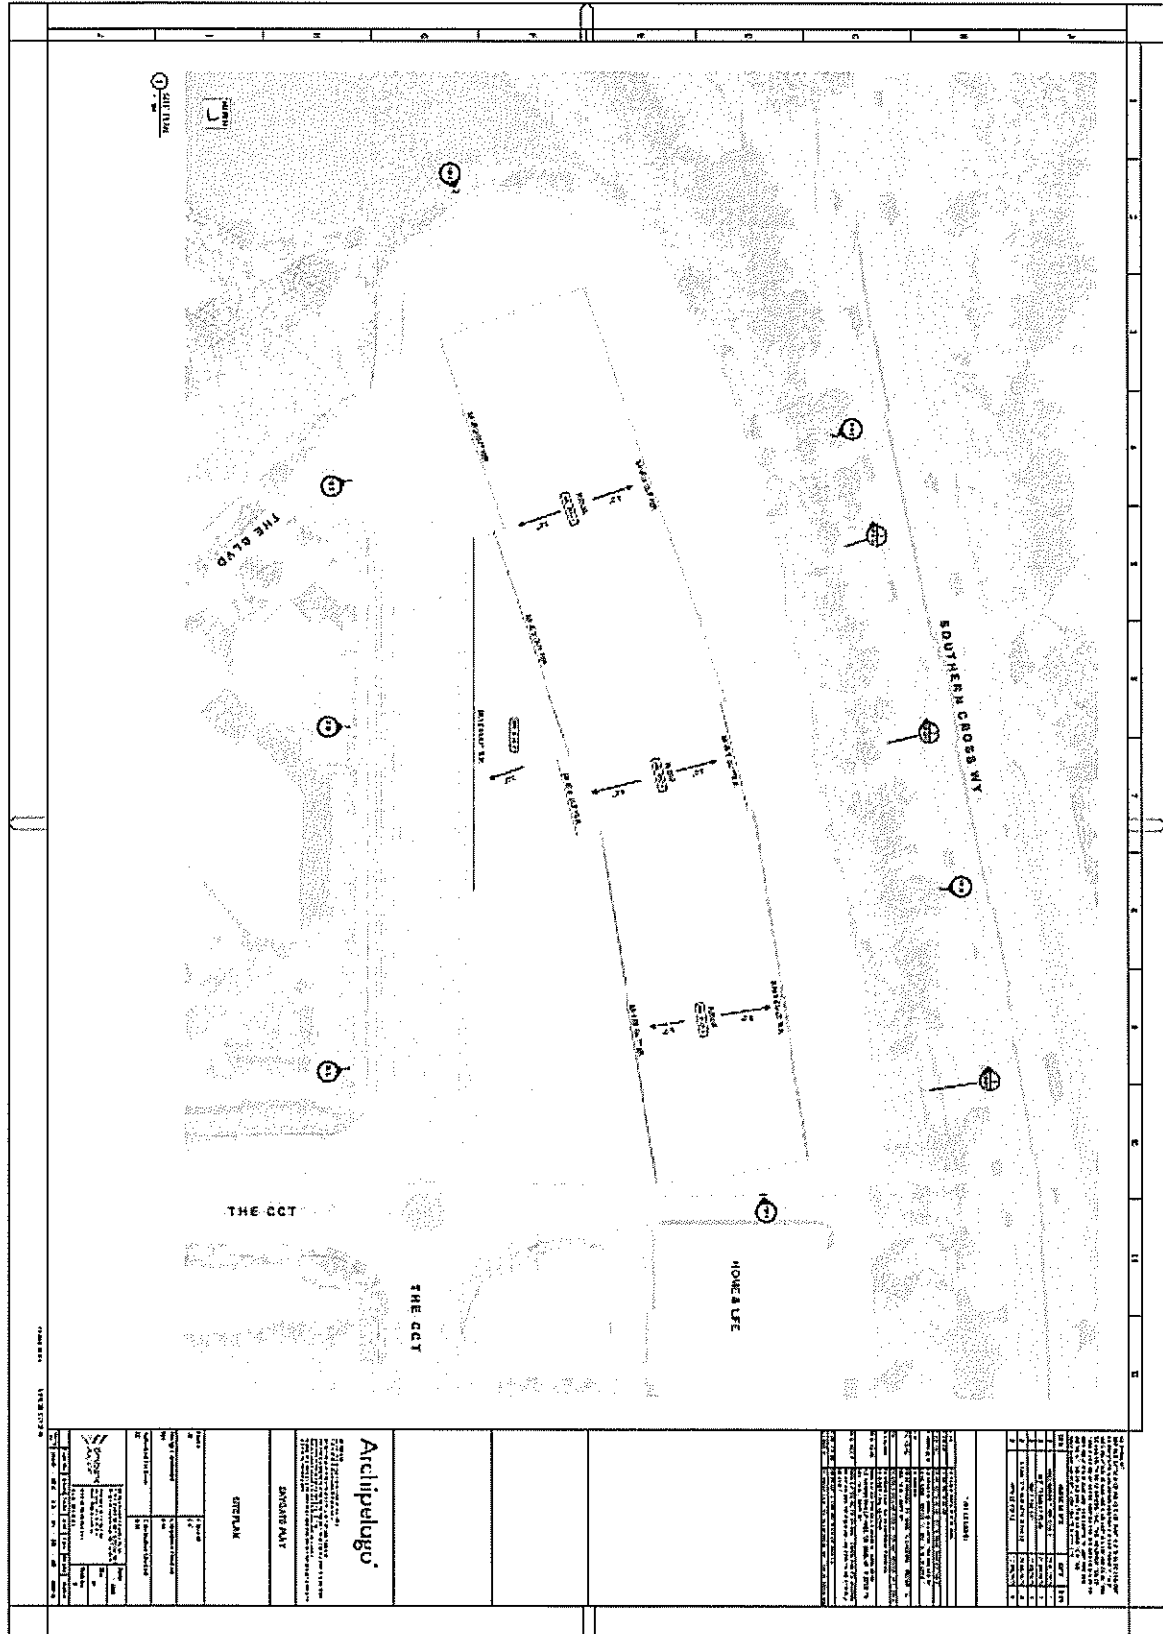


# Brisbane Airport Agreement to Sublease – Building Lease

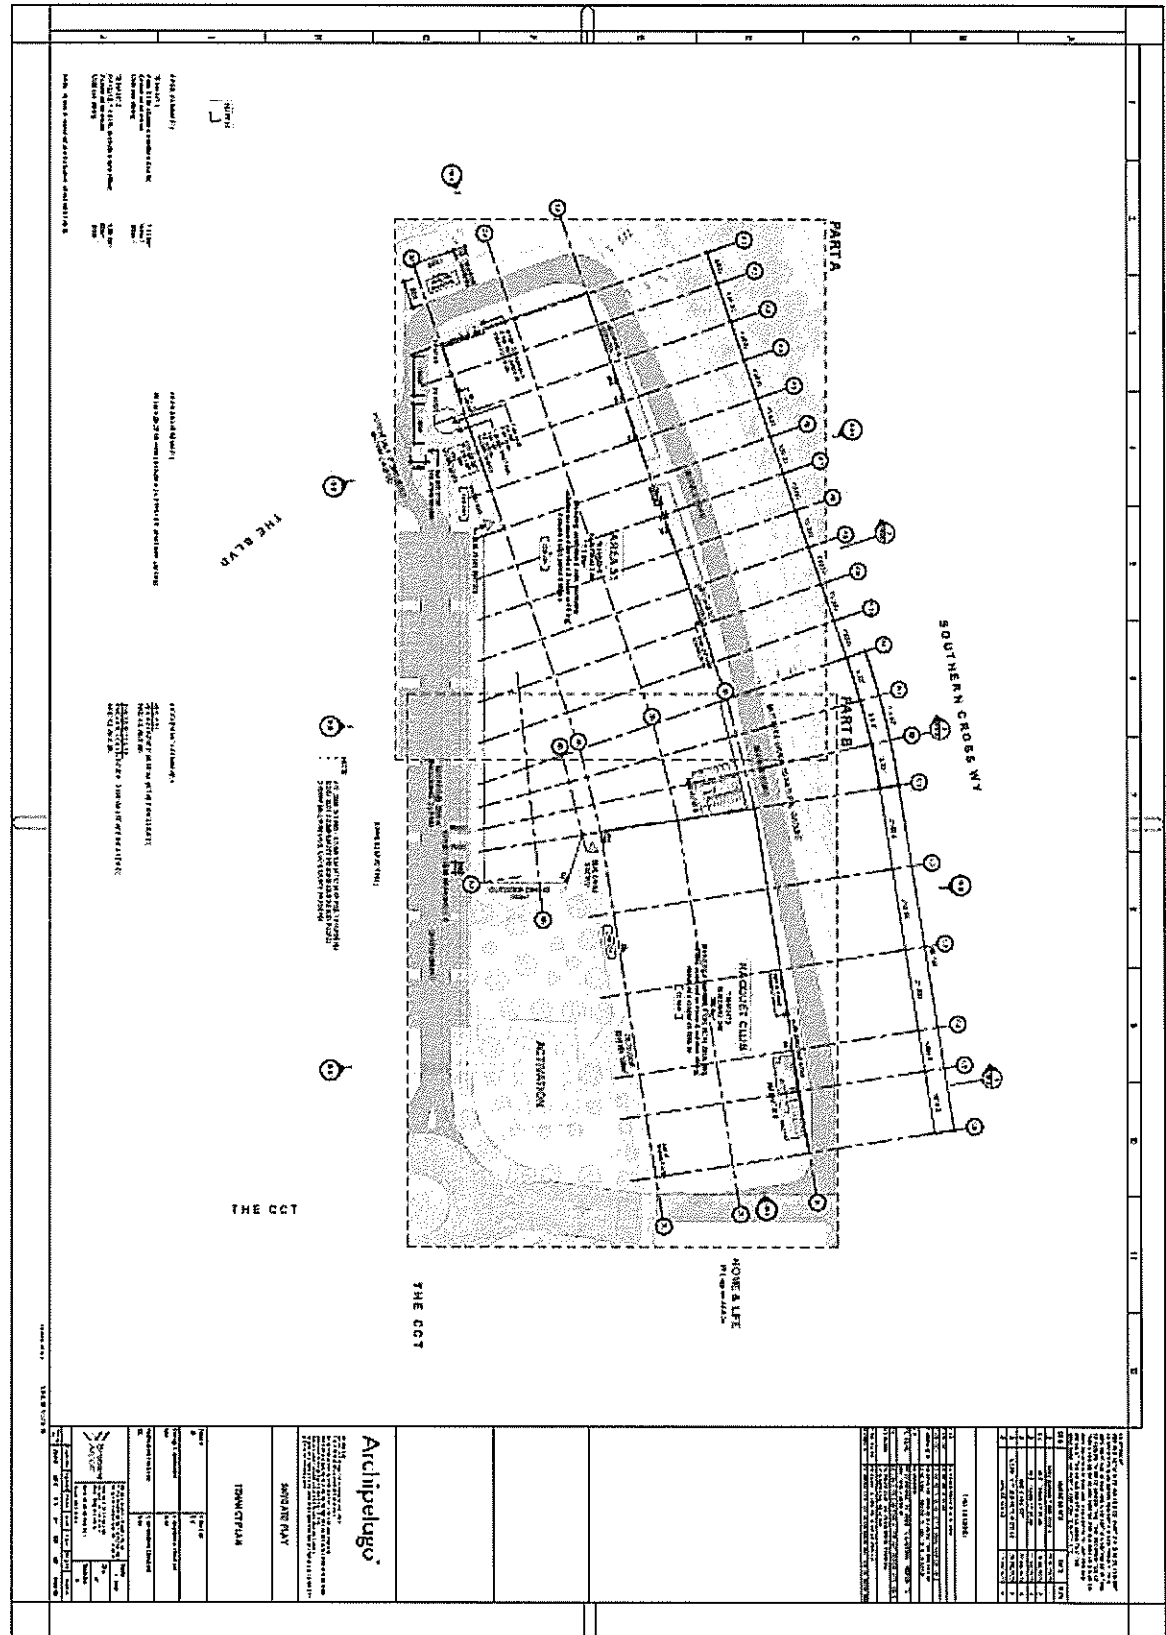


[illegible]

# Brisbane Airport Agreement to Sublease – Building Lease

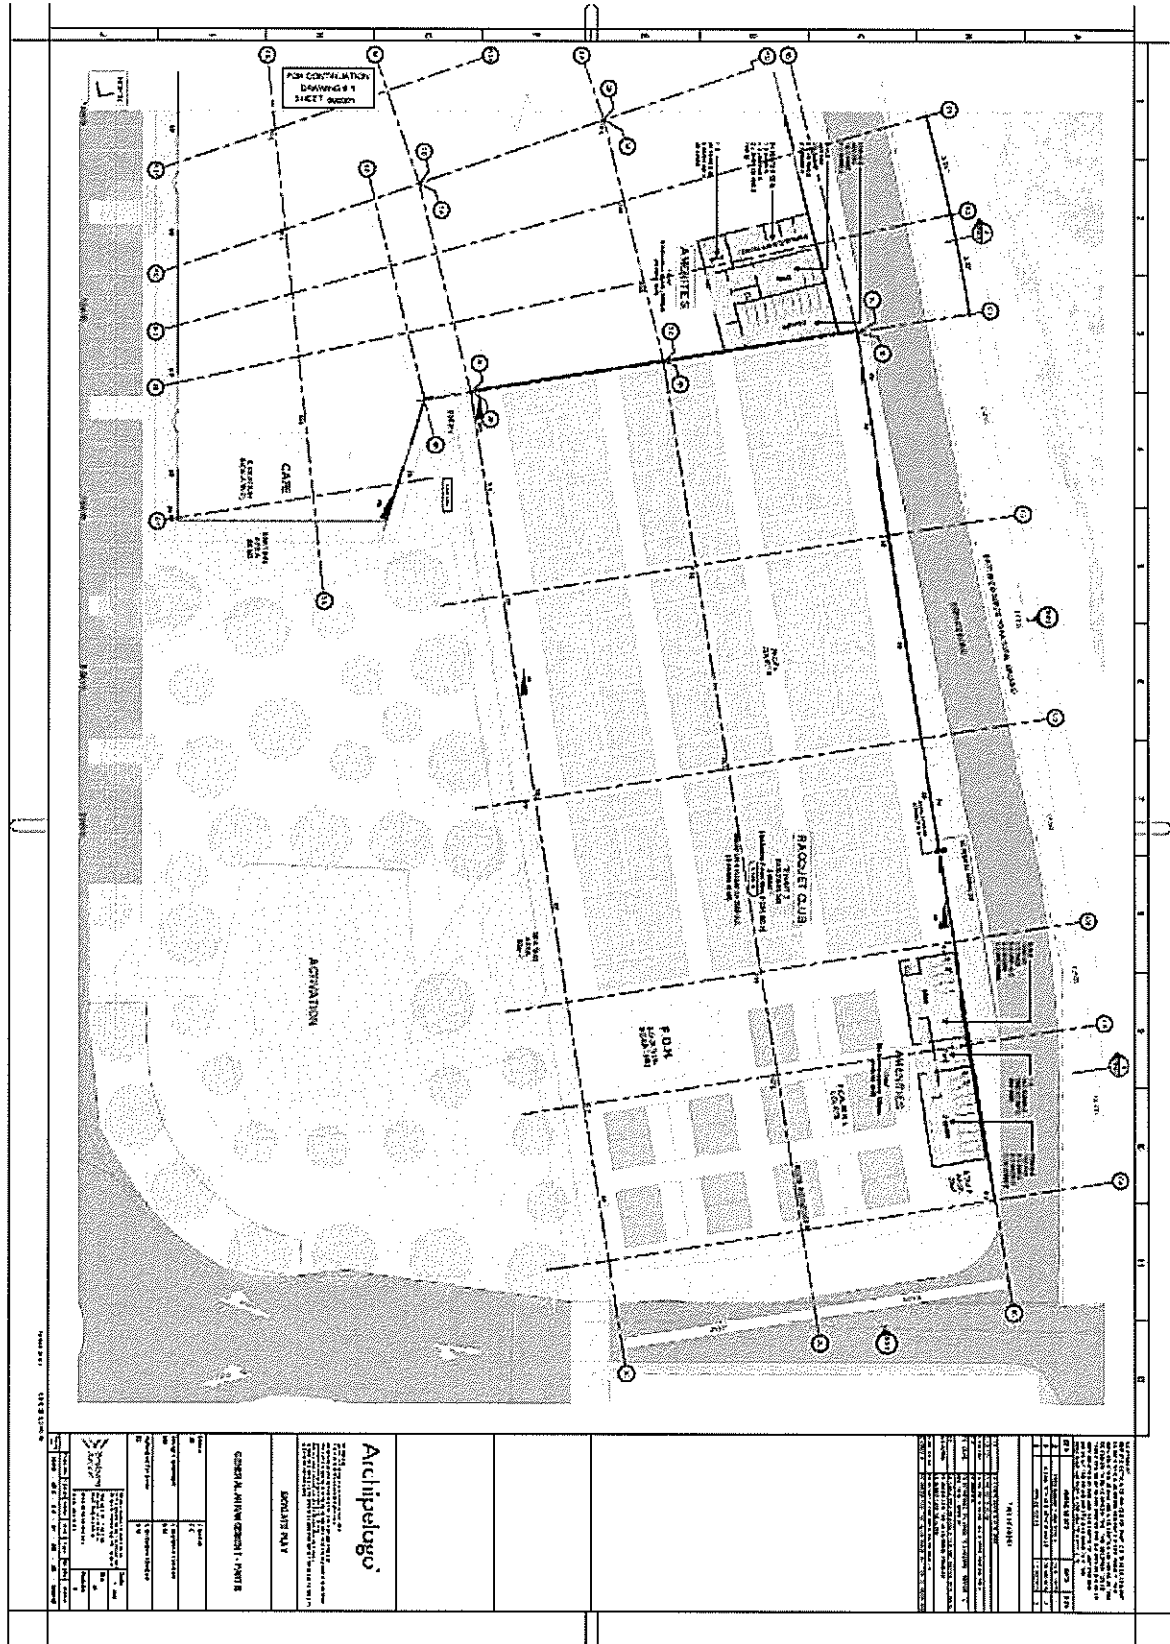


# Brisbane Airport Agreement to Sublease – Building Lease

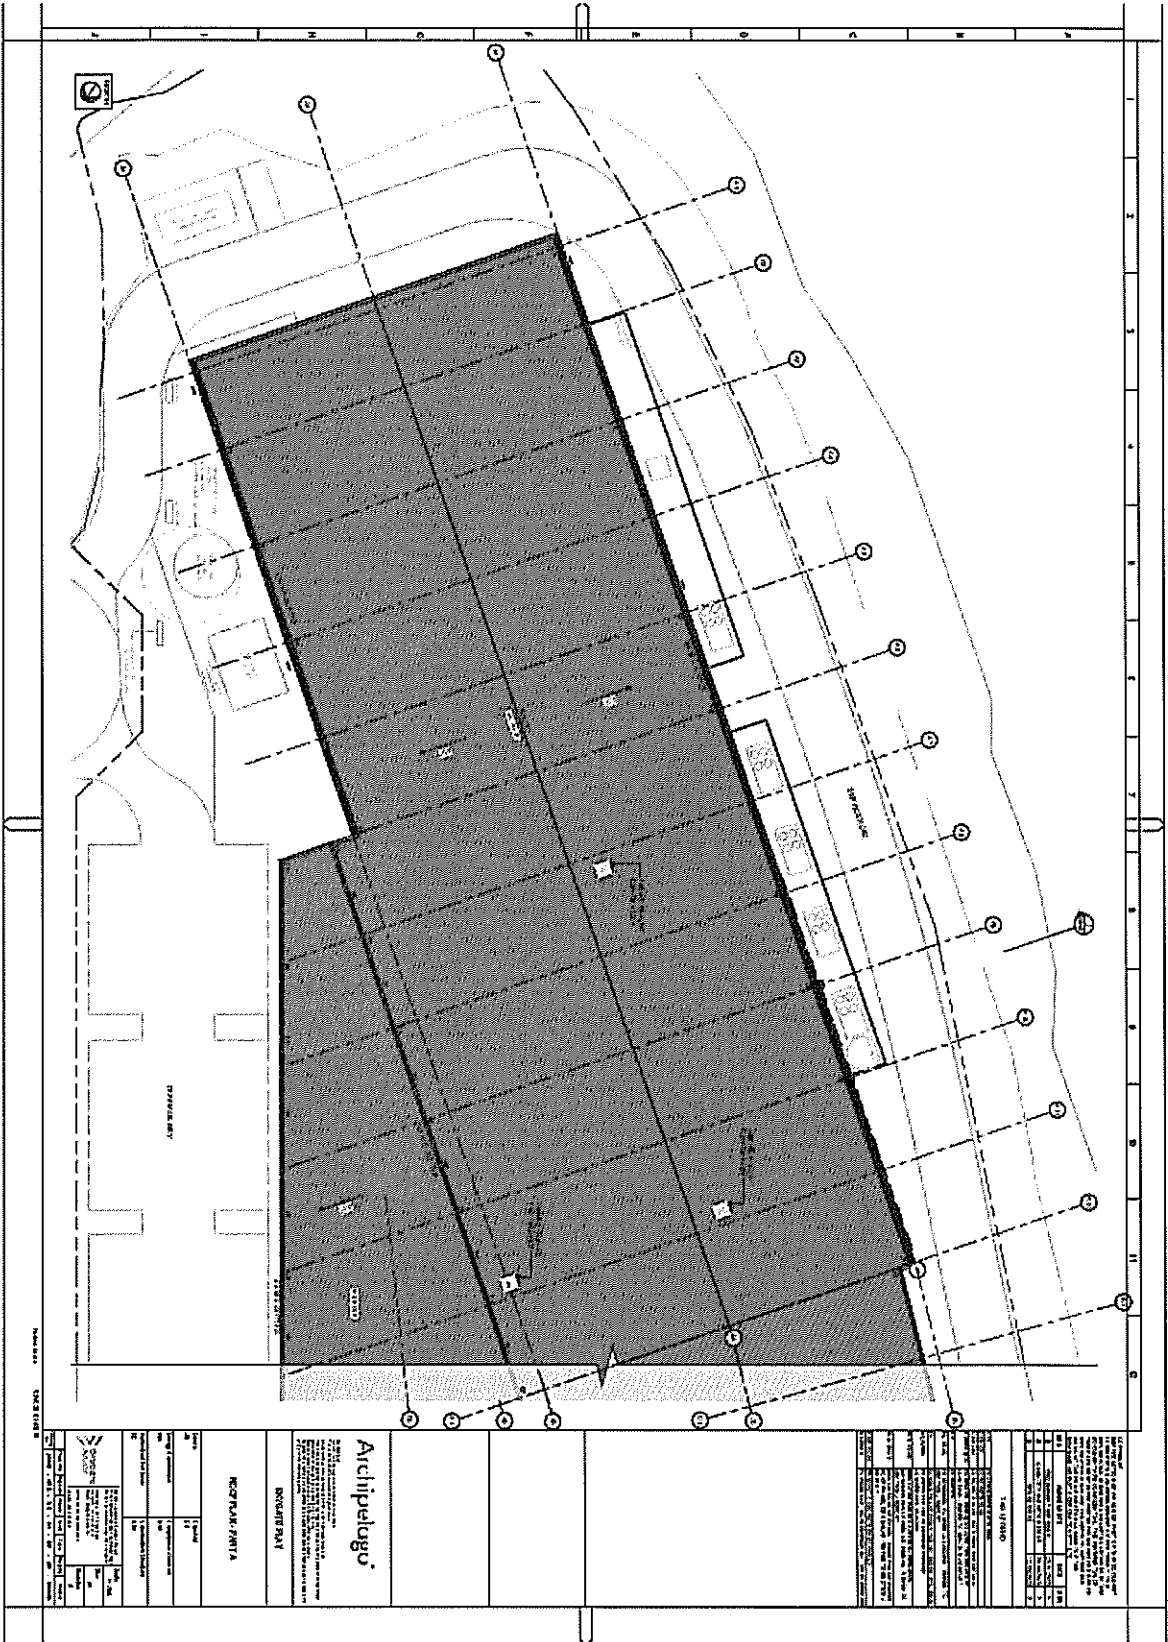



# Brisbane Airport Agreement to Sublease – Building Lease

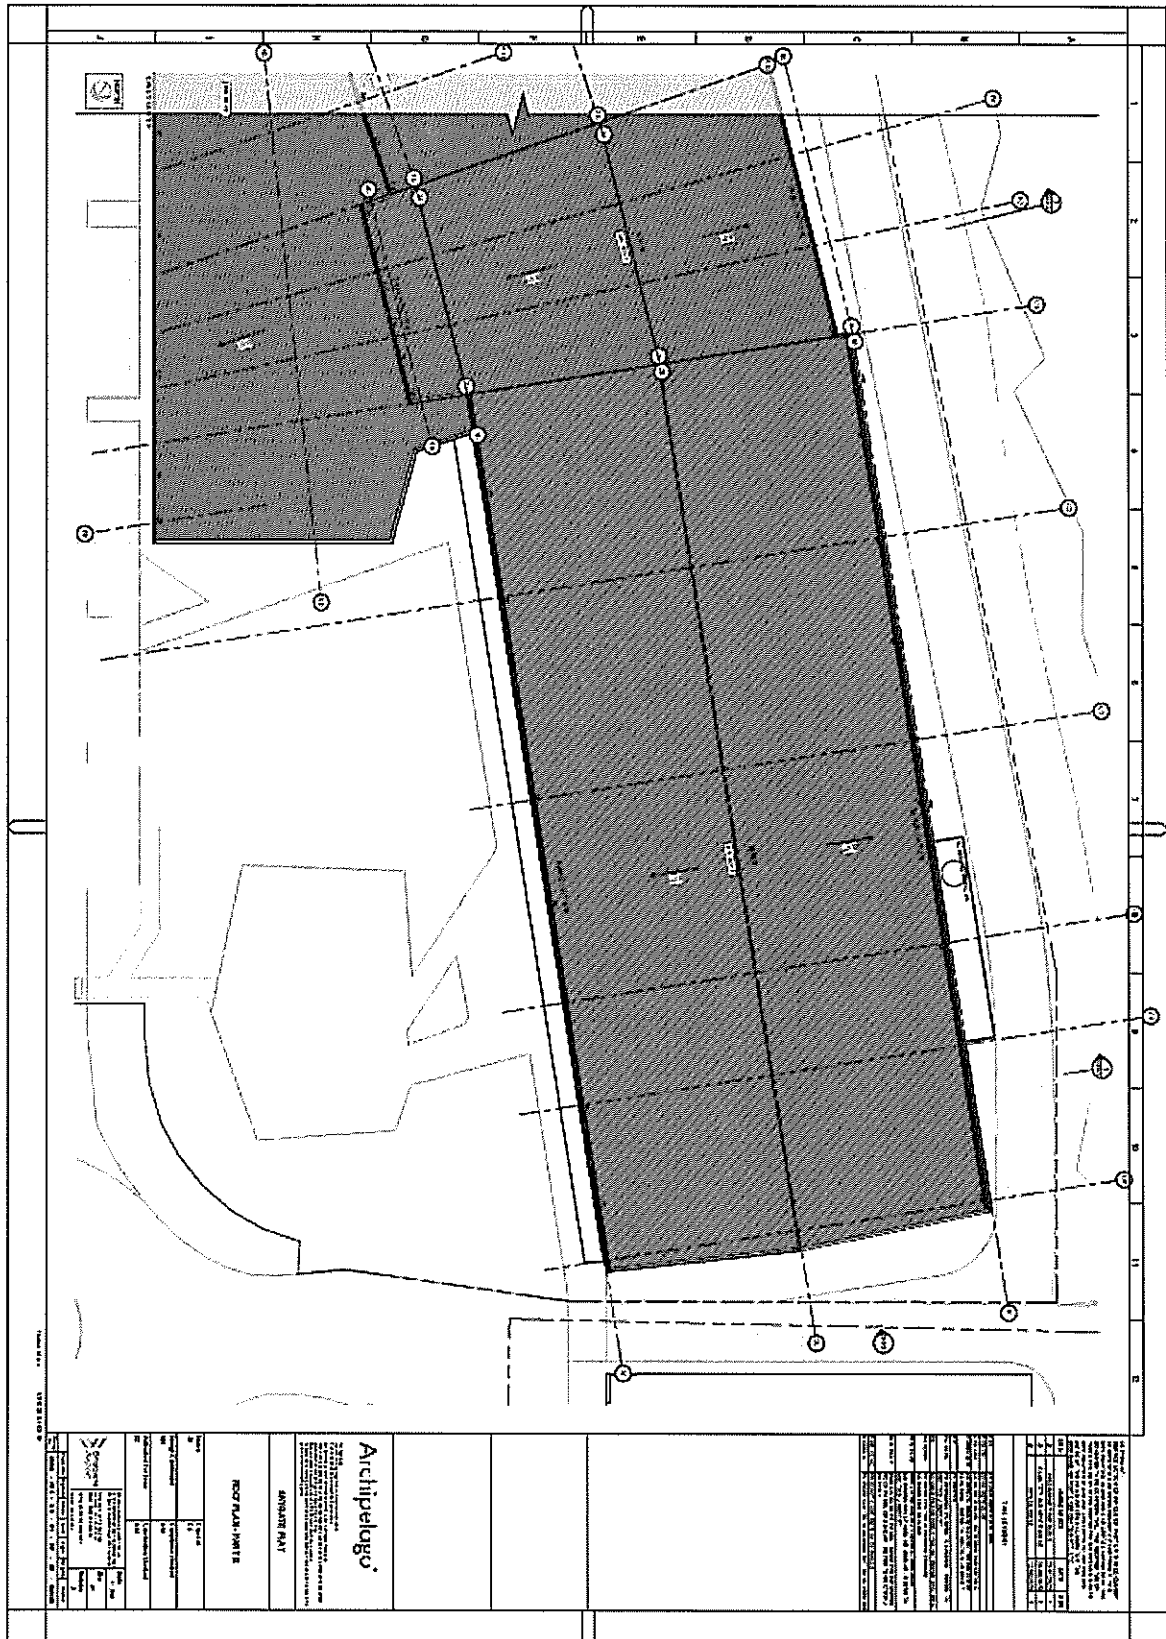


[illegible]

The figure consists of two main architectural drawings: a floor plan and a section view.

**Floor Plan:** This drawing shows the layout of the Archipelago building. It is a long, narrow structure with several rooms and corridors. The rooms are labeled with numbers and names, such as "Room 101", "Room 102", "Room 103", "Room 104", "Room 105", "Room 106", "Room 107", "Room 108", "Room 109", "Room 110", "Room 111", "Room 112", "Room 113", "Room 114", "Room 115", "Room 116", "Room 117", "Room 118", "Room 119", "Room 120", "Room 121", "Room 122", "Room 123", "Room 124", "Room 125", "Room 126", "Room 127", "Room 128", "Room 129", "Room 130", "Room 131", "Room 132", "Room 133", "Room 134", "Room 135", "Room 136", "Room 137", "Room 138", "Room 139", "Room 140", "Room 141", "Room 142", "Room 143", "Room 144", "Room 145", "Room 146", "Room 147", "Room 148", "Room 149", "Room 150", "Room 151", "Room 152", "Room 153", "Room 154", "Room 155", "Room 156", "Room 157", "Room 158", "Room 159", "Room 160", "Room 161", "Room 162", "Room 163", "Room 164", "Room 165", "Room 166", "Room 167", "Room 168", "Room 169", "Room 170", "Room 171", "Room 172", "Room 173", "Room 174", "Room 175", "Room 176", "Room 177", "Room 178", "Room 179", "Room 180", "Room 181", "Room 182", "Room 183", "Room 184", "Room 185", "Room 186", "Room 187", "Room 188", "Room 189", "Room 190", "Room 191", "Room 192", "Room 193", "Room 194", "Room 195", "Room 196", "Room 197", "Room 198", "Room 199", "Room 200".

**Section View:** This drawing shows the building's profile, including the roof, walls, and floor. It is labeled with dimensions and structural details. The section view shows the building's profile with various levels and structural details. The section view shows the building's profile with various levels and structural details.

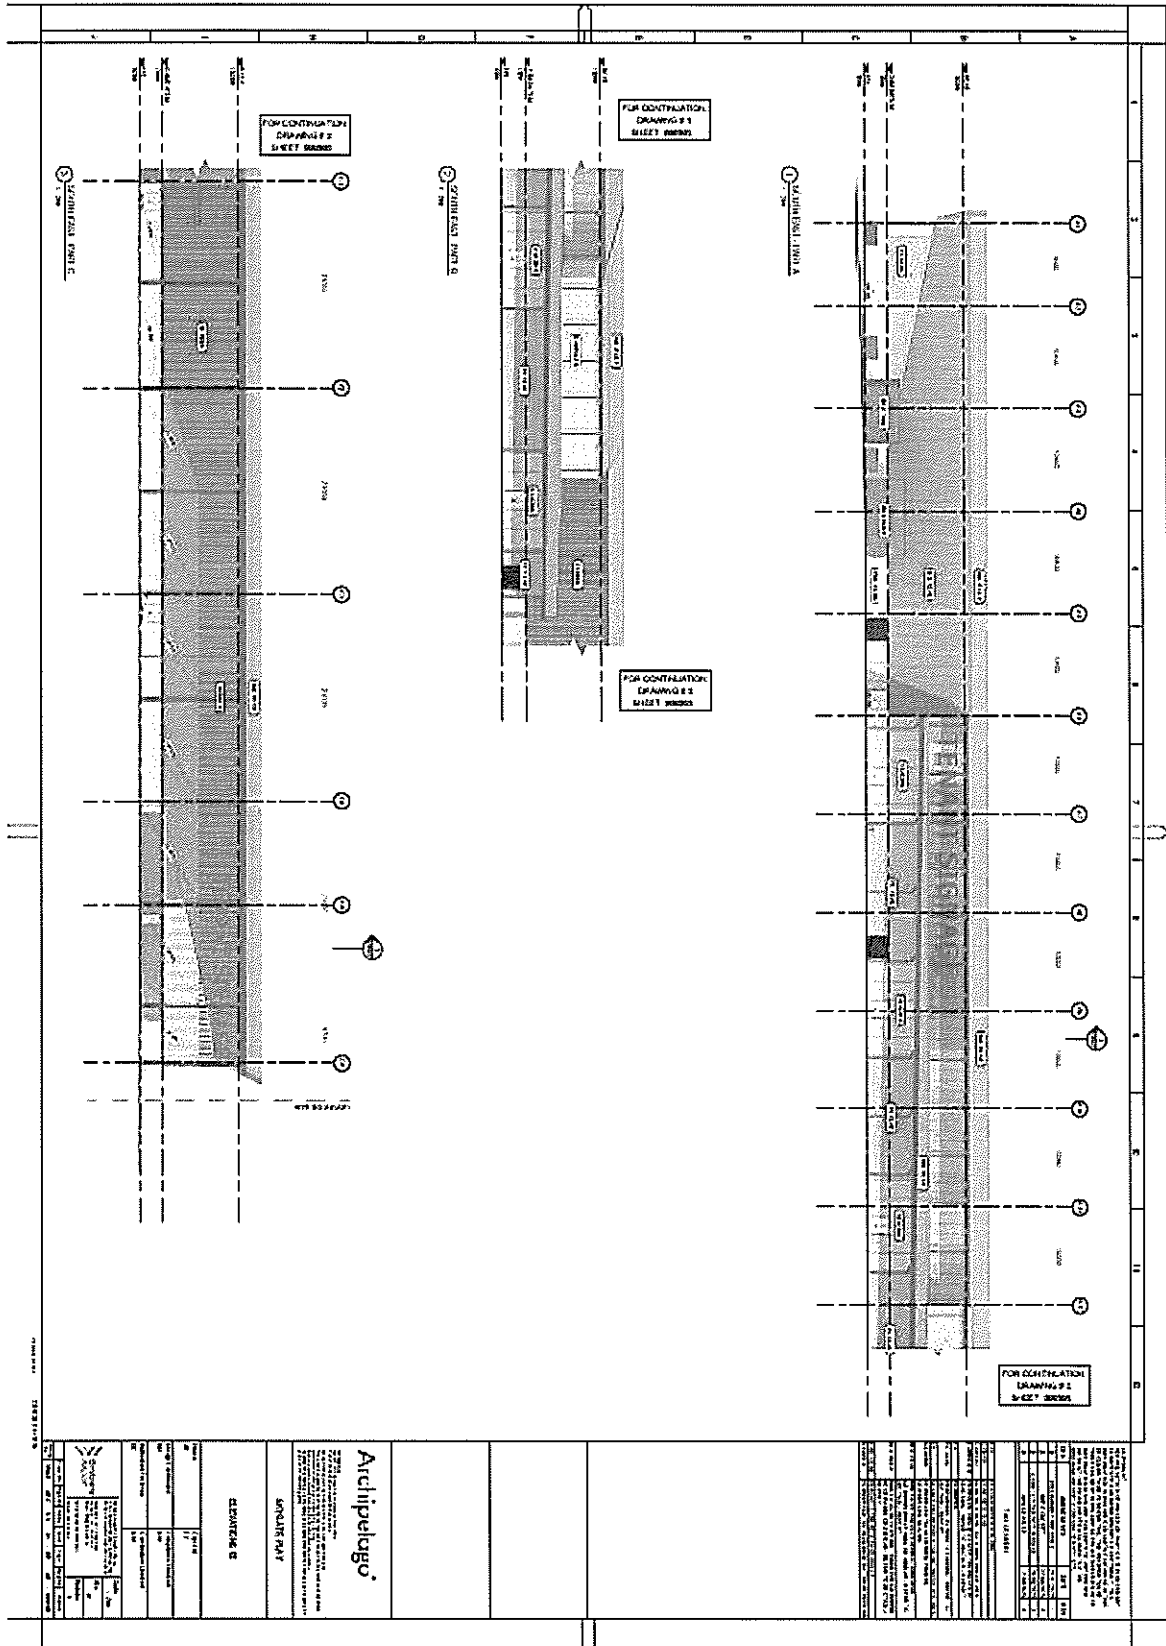

Archipelago

Architect

Engineer

Site Plan

Cross Section

Perspective View

AREA 1

AREA 2

AREA 3

ARCHITECT

ENGINEER


# Brisbane Airport Agreement to Sublease – Building Lease

## Annexure C

### Plan

(refer to clause 1.2(39) of the Agreement)

**Note:** Plan attached in this Annexure C identifies the Premises as Area 51, Tenant 1, Building 346 comprising an Estimated Lettable Area of 7,115m<sup>2</sup>

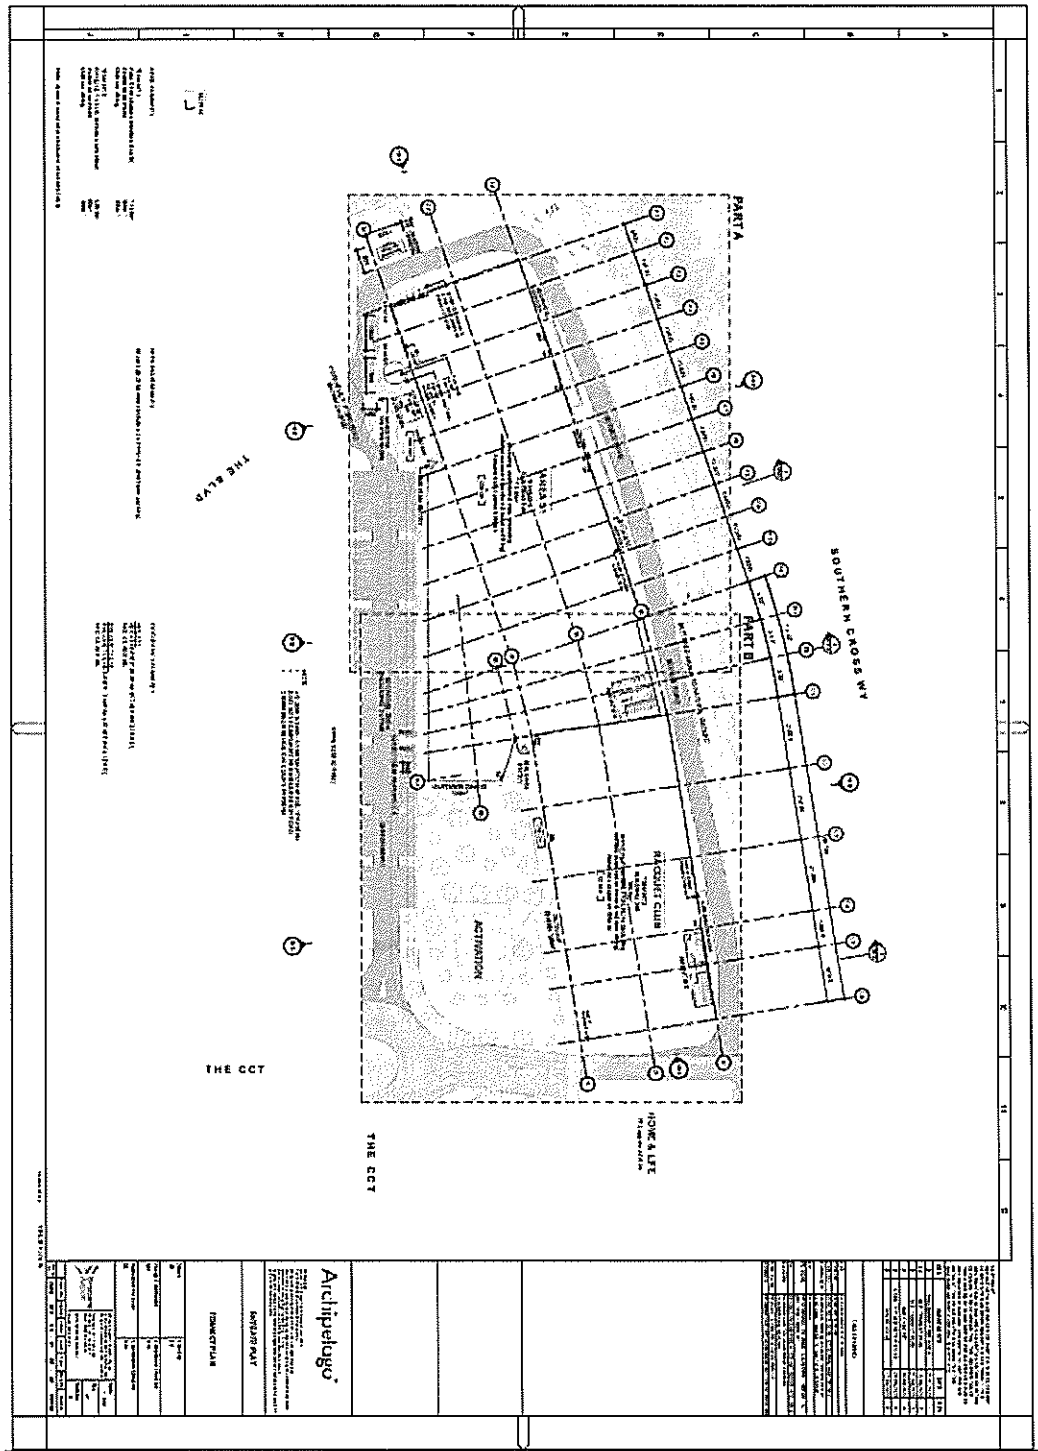

# **Brisbane Airport Agreement to Sublease – Building Lease**

## **Annexure D**

### **Liquidated Damages**

\$8,000 plus GST for each day of delay.