

Brisbane Airport Agreement to Sublease

Annexure A

BAC's Works

(refer to clause **Error! Reference source not found.** of the Agreement)

MAIN BUILDING

BAC is providing a basic tenancy shell and standard services based on an open plan layout of the tenancy as described below and which shall comply with the Agreement. The tenant is responsible for the fit out of the tenancy which shall comply with the Agreement. The Tenant must liaise with the Tenancy Coordinator on all tenancy fit out matters and the Tenancy Coordinator will provide direction on the procedures that must be followed.

Item	Landlord Works / Base Build The following works will be undertaken as BAC's works at BAC cost all inclusions are limited to the base build only
External Walls and Cladding	• Coloured (standard Colorbond colours) steel sheeting complete with all necessary head and sill flashings and fixings, above paint finished concrete dado wall construction • External walls to be a mixture of a painted compressed fibre cement, Colorbond metal, danpalon or similar or painted precast concrete to suit architectural design intent - To be confirmed. • Sun shading & windows to comply with Section J of the NCC. • All walls and windows to be designed to comply with the requirements stipulated by the acoustic engineer
Shopfront / Main Entry Door	• All walls and windows to be designed to comply with the requirements stipulated by the acoustic engineer. No recessed entry mat included • In line with the concept plans, glazed automatic sliding doors to front entry with finish to be powder coated aluminium frame or clear anodised
Internal Floor Slabs & Finish	• The concrete slab to the warehouse shall be designed for a 7.5kPA design live load capacity with burnished finish. • Floor level tolerances to adhere to the NCC & relevant AS for the stipulated building type.
Roof	• Colorbond metal roof sheeting with concealed fixings laid over foil backed fibreglass blanket insulation and safety mesh
Ceiling	• Springing height of 9.7m to underside of structure. Services below.
Intertenancy Wall	Intertenancy wall (between Game Over and Area 51) to be designed to comply with the requirements stipulated by the acoustic engineer

Brisbane Airport Agreement to Sublease

Structural Steel	• Phosphate primer on power wire brush finish to steelwork • External steelwork to be Hot Dipped Galvanised. • Springing height clear to knee of portal frame is 9.7m • Internal Column Layout - cost effective. • Secondary steel provision - cold-formed roof purlins, wall girts, ceiling structural C sections. • Structural steel yield stress min. 350MPa.
External Doors	• External exit doors sized to comply with BCA requirements. • Location of exit doors in accordance with BCA egress requirements
Loading Docks	• On-grade loading dock • 2 x automatic powder coated roller shutter door, 3m high x 5m width • Bollard protection to all openings (2 x external and 2 x internal) • Bollards to be 219mm steel, painted and filled with concrete • Bollards shall also be provided to all down pipes, electrical switchboards, where exposed to trafficable areas, warehouse exit doors externally
Electrical Services	• Electrical load limitations are 450 Amp • Minimum supply of 110 - 130 W /m3, 3 - phase power. • Main switchboard installed • Base building power distribution per the Concept Plans (Qty). • Exit and Emergency Lights shall comply with the requirements of the BCA and relevant Australian Standards to an open plan layout • Must comply with AS/NZS • 1 No. 3 phase DGPO adjacent to Distribution Board/s • 1 x 10amp DGPO every 30 l/m of perimeter wall • Distribution Board to kitchen area. • Mechanical Services Switchboard • Lighting to front of house not more than 320 LUX, Gaming Area not more than 160 LUX, Amenities not more than 80 LUX, PWD not more than 200 LUX and Outdoor Area not more than 80 LUX to 1m above the finished floor level
Mechanical Services	• Structural provisions and discharge point only for base build mechanical and hydraulic services (plant spaces, risers, penetrations) • Must comply with AS for future ventilation systems • Central plant equipment installed • Main trunk lines and risers • Basic air distribution system • HVAC systems sized to meet 500 PAX. • Ductwork, air diffusers, and return air grilles • Toilet exhaust systems with appropriate discharge points • MSSB and associated cabling • Structural penetrations to be completed by the landlord • Landlord to provide the following air conditioning and mechanical ventilation capacity as minimum base build cooling load: 120 W/m2 Kitchen exhaust and make up air: 2000 L/s

Brisbane Airport Agreement to Sublease

Plumbing Services	• Main water supply points • Basic stormwater system • Compliant with AS/NZS • No internal reticulation, plumbing provided to base building amenities only • Hose taps installed to perimeter of building in accordance with BAC guidelines for cleaning and maintenance. • Trade waste connection point with floor waste provided to café area • Sanitary drainage connection point • Individual water meters per tenancy • Minimum 5,000 L Grease trap to be installed in accordance with local water authority requirements
Fire Protection Services	All work shall be carried out in accordance with the following codes, standards and regulations: • Australian Standards • BCA • Airport Rescue & Fire Fighting (ARFF) • Fire Sprinkler shall be provided in accordance with the BCA and relevant Australian Standards.. • Fire wall achieving an FRL 90/90/90 to provide fire separation to adjacent tenancy. • Fire detection and alarm, fire hydrant, fire hose reel and fire extinguishers shall be in accordance with BCA with provision limited to the base build only. * Thermal or fire detectors or sprinklers as required by the applicable Authorities/official requirements.
Security System & Access Control	Nil Provision
Communication Services	• Provision of internet and telephone service conduits and fibre lead-in to boundary of tenancy.
BMS Systems	• BAC Approved Building Management System (BMS) integration • Core monitoring systems
Other Special Services	Nil Provision
Solar	Nil Provision
Internal Fit out	• Internal walls (including intertenancy wall) to be insulated to extent required to achieve 21-24 degree internal temperature (to all non go-karting areas).

AMENITIES

BAC is providing a basic tenancy shell and standard services based on an open plan layout of the tenancy as described below and which shall comply with the Agreement.

Brisbane Airport Agreement to Sublease

The tenant is responsible for the fit out of the tenancy which shall comply with the Agreement to Lease. The Tenant must liaise with the Tenancy Coordinator on all tenancy fit out matters and the Tenancy Coordinator will provide direction on the procedures that must be followed.

Item	Landlord Works / Base Build - Cold Shell The following works will be undertaken as BAC's works at BAC cost all inclusions are limited to the base build only
QTY of Amenities	• To meet BAC and Legislation for Class 9b building for exclusive use of tenancy.
End of Trip facilities (shower and lockers)	• DDA bathroom to comply with NCC requirements. • Separate shower and lockers as/if required by BAC standards
Internal Floor Finish	• Vitrified Tile
Ceiling type and finish	• Flush set plasterboard ceiling, with paint finish
Wall type and finish	• Painted Fibre Cement, 200mm high tiled skirting, 2100mm high tiled walls to showers, 1000mm high tiled behind urinals and tiled behind the vanities/splashback as shown on the architectural drawings. Note: Some heights may vary due to fixing locations.
Joinery	• Dolphin Avero all-in-one vanity units to vanities, except for PWDs.
Fixtures & Fittings	• Sanitaryware and fittings as per the BAC standard schedule.
Toilet Partitions	• Toilet partitions to be high-compact laminate (or other approved equivalent). Frameless mirrors with concealed fixings over vanities.
Electrical Services	• LED auto lighting • All lux levels to be in accordance with the relevant Australian Standards and BCA • Exit and Emergency lights shall comply with the requirements of the BCA and relevant Australian Standards • 2 x DGPOs to each amenity room
Mechanical Services	• Toilets/amenities/change rooms will be mechanically ventilated in accordance with the relevant Australian Standards.
Plumbing Services	• All work to be carried out in accordance with the relevant Australian Standard • Sanitaryware to be provided in accordance with "Brisbane Airport Corporation Sanitaryware Guidelines – Industrial Facilities" • Complete core bathrooms • Main water reticulation • Hot water system infrastructure

Brisbane Airport Agreement to Sublease

Fire Protection Services

All work shall be carried out in accordance with the following codes, standards and regulations:

- Australian Standards
- BCA
- Airport Rescue & Fire Fighting (ARFF)

Fire Sprinklers (if required) shall be provided in accordance with the BCA.

- Thermal or Fire Detectors (if required)

EXTERNAL WORKS

BAC is providing a basic tenancy shell and standard services based on an open plan layout of the tenancy as described below and which shall comply with the Agreement.

The tenant is responsible for the fit out of the tenancy which shall comply with the Agreement to Lease. The Tenant must liaise with the Tenancy Coordinator on all tenancy fit out matters and the Tenancy Coordinator will provide direction on the procedures that must be followed.

Item	Landlord Works / Base Build - Cold Shell The following works will be undertaken as BAC's works at BAC cost all inclusions are limited to the base build only
Car Parking	N/A
Bike storage	• Bike storage to comply with BAC Planning Guidelines
Building Signage	• Provision for the main building sign is provided. (power and structural provision) to suit the signage nominated in the BAC Signage Manual
Pylon Signage	N/A
Landscape	• All Landscaping works shall be undertaken in accordance with the relevant BAC Guidelines • Soft landscaping shall be provided to the areas indicated on the concept plans • Plants will be a selected range of Australian native, groundcover, shrubs and non-deciduous trees • The defect liability period for the landscaping improvements is 3 months. Following this, BAC takes responsibility of maintaining landscape.
Waste	• Provision and waste management to cold shell design
Line Marking	N/A
Fencing & Gates	N/A
Pavement	• Concrete apron service lane to rear of building only appropriate for rigid vehicle up to 12.5m in length

GENERAL

Brisbane Airport Agreement to Sublease

BAC is providing a basic tenancy shell and standard services based on an open plan layout of the tenancy as described below and which shall comply with the Agreement.


The tenant is responsible for the fit out of the tenancy which shall comply with the Agreement. The Tenant must liaise with the Tenancy Coordinator on all tenancy fit out matters and the Tenancy Coordinator will provide direction on the procedures that must be followed.

Item	Landlord Works / Base Build - Cold Shell The following works will be undertaken as BAC's works at BAC cost all inclusions are limited to the base build only
Temporary Works	• BAC's Contractor is responsible for all temporary works and services during construction of cold shell
Defects Liability and Maintenance	• The defect liability period for the building improvements is 12 months • The defect liability period for the landscaping improvements is 3 months
Dangerous Goods	Nil provision
Livening of Services	• Connection to all mains
Fees and charges for authorities, approvals and inspections	• BAC's Contractor is responsible for all fees, charges, authorities, approvals and inspections
Disability	• BAC's Contractor responsible for an must ensure that all works (whether to the Main Building, Amenities or External works) must comply with all disability discrimination legislation involving structural and non-structural work

Brisbane Airport Agreement to Sublease

Plan

Note: This plan is subject to ongoing review between BAC and Game Over.

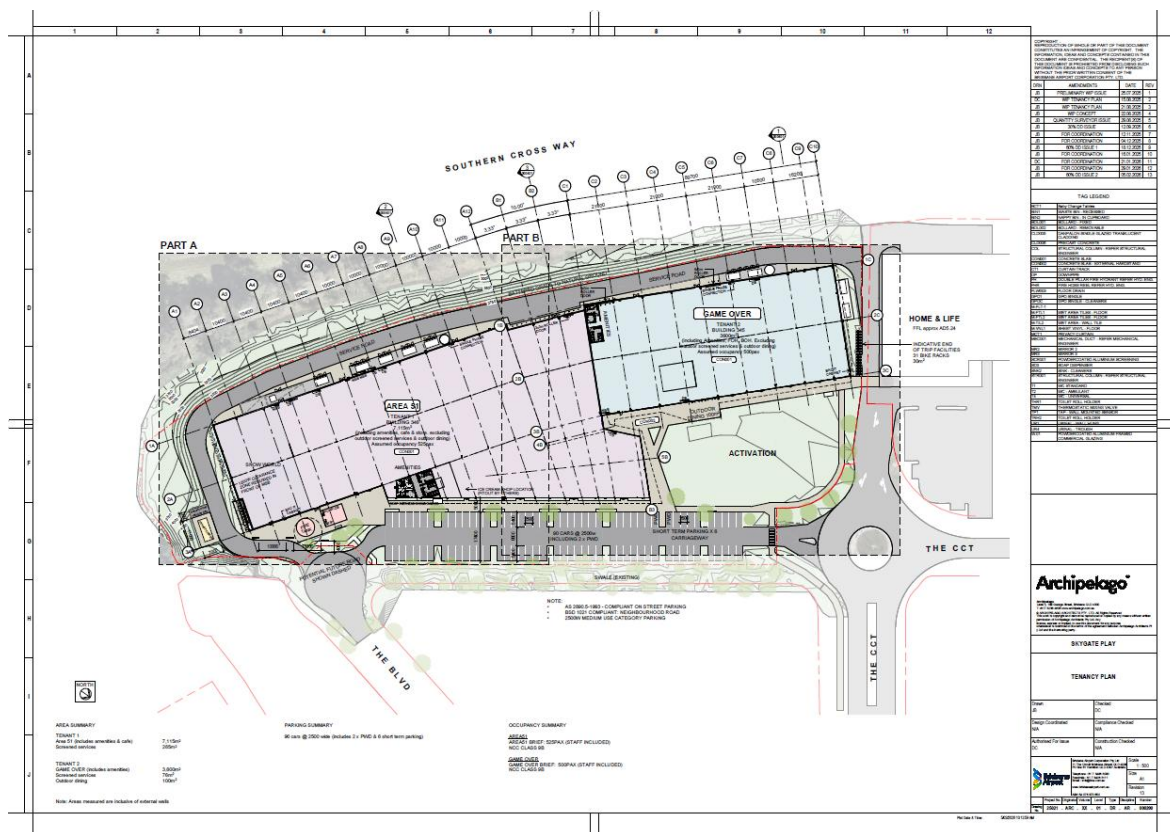

Archipelago

SKATE PLAZA

PERSPECTIVES

VIEW 1

VIEW 2

VIEW 3

VIEW 4

STORAGE PANELS OVER CLADDING

30' HIGH AWNING

CLADDING

HOME & LIFE (EXISTING)

THE COX

VIEW 1

VIEW 2

VIEW 3

VIEW 4

Archipelago

SKATE PLAZA

PERSPECTIVES

VIEW 1

VIEW 2

VIEW 3

VIEW 4

STORAGE PANELS OVER CLADDING

30' HIGH AWNING

CLADDING

HOME & LIFE (EXISTING)

THE COX

VIEW 1

VIEW 2

VIEW 3

VIEW 4

Brisbane Airport Agreement to Sublease

Annexure C

Indicative Drawings (if any)