

SEDIMENT CONTROL

1. OPTIMUM BENEFIT MUST BE MADE OF EVERY OPPORTUNITY TO TRAP SEDIMENT WITHIN THE WORK SITE, & AS CLOSE AS PRACTICABLE TO ITS SOURCE.
2. SEDIMENT TRAPS MUST BE INSTALLED & OPERATED TO BOTH COLLECT & RETAIN SEDIMENT.
3. THE POTENTIAL SAFETY RISK OF A PROPOSED SEDIMENT TRAP TO SITE WORKERS & THE PUBLIC MUST BE GIVEN APPROPRIATE CONSIDERATION, ESPECIALLY THOSE DEVICES LOCATED WITHIN PUBLICLY ACCESSIBLE AREAS.
4. ALL REASONABLE & PRACTICABLE MEASURES MUST BE TAKEN TO PREVENT, OR AT LEAST MINIMISE, THE RELEASE OF SEDIMENT FROM THE SITE.
5. SUITABLE ALL-WEATHER MAINTENANCE ACCESS MUST BE PROVIDED TO ALL SEDIMENT CONTROL DEVICES.

SEDIMENT FENCE

1. SEDIMENT FENCE TO BE INSTALLED ALONG A LINE OF CONSTANT GROUND ELEVATION WHEREVER PRACTICAL.
2. BOTH ENDS OF THE SEDIMENT FENCE TO EXTEND UP THE SLOPE AT LEAST 1m.
3. SUPPORT POST TO BE SPACED A MAXIMUM 2m UNLESS THE FENCE IS SUPPORTED BY A TOP WIRE OR MESH BACKING, IN WHICH CASE 3m MAXIMUM SPACING.
4. FENCE 'RETURNS' SHALL BE INSTALLED AT MAXIMUM 20m SPACING IF FENCE IS INSTALLED ALONG THE CONTOUR, OTHERWISE 5 TO 10m MAXIMUM SPACING DEPENDING ON SLOPE.
5. MINIMUM 4 STAPLES OR TIE WIRES PER STAKE.

MATERIALS:

1. **FABRIC:** POLYPROPYLENE, POLYAMIDE, NYLON, POLYESTER, OR POLYETHYLENE WOVEN OR NON-WOVEN FABRIC, AT LEAST 700mm IN WIDTH & A MINIMUM UNIT WEIGHT OF 140GSM. ALL FABRICS TO CONTAIN ULTRAVIOLET INHIBITORS & STABILISERS TO PROVIDE A MINIMUM OF 6 MONTHS OF USEABLE CONSTRUCTION LIFE (ULTRAVIOLET STABILITY EXCEEDING 70%).
2. **FABRIC REINFORCEMENTS:** WIRE OR STEEL MESH MINIMUM 14-GAUGE WITH A MAXIMUM MESH SPACING OF 200mm.
3. **SUPPORT POSTS/STAKES:** 1500mm² (MIN.) HARDWOOD, 2500mm² (MIN.) SOFTWOOD, OR 15kg/m (MIN.) STEEL STAR PICKETS SUITABLE FOR ATTACHING FABRIC.

INSTALLATION OF A SPILL-THROUGH WEIR:

1. LOCATE THE SPILL-THROUGH WEIR SUCH THAT THE WEIR CREST WILL BE LOWER THAN THE GROUND LEVEL AT EACH END OF THE FENCE.
2. ENSURE THE CREST OF THE SPILL-THROUGH WEIR IS AT LEAST 300mm ABOVE THE GROUND ELEVATION.
3. SECURELY TIE A HORIZONTAL CROSS MEMBER (WEIR) TO THE SUPPORT POSTS/STAKES EACH SIDE OF THE WEIR. CUT THE FABRIC DOWN THE SIDE OF EACH POST & FOLD THE FABRIC OVER THE CROSS MEMBER & APPROPRIATELY SECURE THE FABRIC.
4. INSTALL A SUITABLE SPLASH PAD &/OR CHUTE IMMEDIATELY DOWN-SLOPE OF THE SPILL-THROUGH WEIR TO CONTROL SOIL EROSION & APPROPRIATELY DISCHARGE THE CONCENTRATED FLOW PASSING OVER THE WEIR.

INSTALLATION FABRIC DROP INLET PROTECTION:

1. ENSURE THAT THE INSTALLATION OF THE SEDIMENT TRAP WILL NOT CAUSE UNDESIRABLE SAFETY OR FLOODING ISSUES.
2. WHERE POSSIBLE, EXCAVATE A 200x200mm TRENCH AROUND THE INLET STRUCTURE.
3. SPACE STAKES EVENLY AROUND THE PERIMETER OF THE STORMWATER INLET AT A MAXIMUM 1m SPACING & SECURELY DRIVE THEM INTO THE GROUND.
4. WHERE NECESSARY, INSTALL A HORIZONTAL SPILL-THROUGH WEIR TO LIMIT THE MAXIMUM HEIGHT WATER PONDING AROUND THE STRUCTURE.
5. ENSURE THE MAXIMUM POND HEIGHT WILL NOT CAUSE A SAFETY HAZARD, INCLUDING UNDESIRABLE FLOODING OF AN ADJACENT PROPERTY OR ROADWAY. WHEREVER PRACTICAL, THE SPILL-THROUGH WEIR SHOULD BE AT LEAST 300mm ABOVE GROUND LEVEL.
6. IF A SPILL THROUGH WEIR IS NOT INSTALLED, THEN FRAME THE TOP OF THE STAKES WITH HORIZONTAL CROSS MEMBERS.
7. CUT FABRIC FROM A CONTINUOUS ROLL TO ELIMINATE JOINTS.
8. PLACE THE BOTTOM 300mm OF FABRIC IN THE EXCAVATED TRENCH
9. SECURELY FASTEN THE FABRIC TO THE STAKES & CROSS MEMBERS AT THE FABRIC JOINT, OVERLAP THE FABRIC TO THE NEXT STAKE.
10. BACKFILL THE TRENCH WITH AT LEAST 200mm OF AGGREGATE OR COMPACTED SOIL. IF A TRENCH CANNOT BE EXCAVATED, LAY THE BOTTOM 300mm OF FABRIC EVENLY ON THE GROUND SURFACE & COVER WITH A 300mm LAYER OF AGGREGATE, NOT EARTH OR SOIL.
11. WHERE REQUIRED, INSTALL A FLOW CONTROL BUND TO MAINTAIN THE SPECIFIED POOL DEPTH & CONTROL THE MOVEMENT OF WATER.
12. TAKE ALL NECESSARY MEASURES TO MINIMISE THE SAFETY RISK CAUSED BY THE STRUCTURE & TO PREVENT UNSAFE ENTRY INTO THE STORMWATER INLET.

SEDIMENT BASIN

1. REMOVE ALL VEGETATION & TOPSOIL FROM UNDER THE DAM WALL & FROM WITHIN THE STORAGE AREA.
2. PREPARE THE SITE UNDER THE EMBANKMENT BY RIPPING AT LEAST 100mm TO HELP BOND COMPACTED FILL TO THE EXISTING SUBSTRATE.
3. FOR EARTH EMBANKMENT MATERIAL TYPE & COMPACTION REFER TO DTMR SPECIFICATION MRTS04 SECTION 2.6 – WATER RETAINING EMBANKMENT.
4. CONSTRUCT EMERGENCY SPILLWAY.
5. INSTALL MARKER POST SHOWING MAXIMUM STORAGE & SETTLING ZONE VOLUMES.
6. AS-CONSTRUCTED PLANS MUST BE PREPARED FOR ALL CONSTRUCTED SEDIMENT BASINS & ASSOCIATED EMERGENCY SPILLWAYS. SUCH PLANS MUST APPROPRIATELY VERIFY THE BASIN'S DIMENSIONS, LEVELS & VOLUMES, & MUST BE SUBMITTED TO THE RELEVANT REGULATORY AUTHORITY WITHIN 14 CALENDAR DAYS OF THE CONSTRUCTION OF EACH BASIN.
7. BASINS SHOULD BE APPROPRIATELY FENCED & MARKED BY WARNING SIGNS IF UNSUPERVISED PUBLIC ACCESS IS LIKELY & PUBLIC SAFETY IS AT RISK.

SITE MONITORING & MAINTENANCE

1. ALL DRAINAGE, EROSION & SEDIMENT CONTROL MEASURES MUST BE INSPECTED:
 - (i) AT LEAST DAILY (WHEN WORK IS OCCURRING ON-SITE);
 - (ii) AT LEAST WEEKLY (WHEN WORK IS NOT OCCURRING ON-SITE);
 - (iii) WITHIN 24 HOURS OF EXPECTED RAINFALL; &
 - (iv) WITHIN 18 HOURS OF A RAINFALL EVENT OF SUFFICIENT INTENSITY & DURATION TO CAUSE RUNOFF ON-SITE).
2. INSPECTION SHALL BE CONDUCTED IN LINE WITH THE FOLLOWING AS A MINIMUM:
 - i) RECORD TYPE OF DEVICE/CONTROL MEASURE BEING INSPECTED & ITS LOCATION;
 - ii) RECORD THE CONDITION OF EACH DEVICE/CONTROL MEASURE BEING INSPECTED;
 - iii) RECORD MAINTENANCE REQUIREMENTS FOR DEVICE/CONTROL MEASURE BEING INSPECTED;
 - iv) RECORD SEDIMENT VOLUMES REMOVED FROM DEVICE/CONTROL MEASURE BEING INSPECTED;
 - v) RECORD DETAILS OF SEDIMENT BASIN TREATMENT, FLOCCULANT DOSAGE & CLEANOUTS;
 - vi) RECORD SEDIMENT DISPOSAL PROCEDURES & LOCATION;
2. ALL DRAINAGE, EROSION & SEDIMENT CONTROL MEASURES MUST BE MAINTAINED IN PROPER WORKING ORDER AT ALL TIMES DURING THEIR OPERATIONAL LIVES.
4. SEDIMENT CONTROL DEVICES MUST BE DE-SILTED & MADE FULLY OPERATIONAL AS SOON AS REASONABLE & PRACTICABLE AFTER A SEDIMENT-PRODUCING EVENT, WHETHER NATURAL OR ARTIFICIAL, IF THE DEVICE'S SEDIMENT RETENTION CAPACITY FALLS BELOW 75% OF ITS DESIGN RETENTION CAPACITY. DE-SILT SEDIMENT TRAP IF THE SEDIMENT LEVEL EXCEEDS 1/3 OF THE CREST HEIGHT.
5. MATERIALS, WHETHER LIQUID OR SOLID, REMOVED FROM SEDIMENT CONTROL DEVICES DURING MAINTENANCE OR DECOMMISSIONING, MUST BE DISPOSED OF IN A MANNER THAT DOES NOT CAUSE ONGOING SOIL EROSION OR ENVIRONMENTAL HARM.
7. ALL WATER QUALITY DATA, INCLUDING DATES OF RAINFALL, DATES OF TESTING, TESTING RESULTS & DATES OF WATER RELEASE, MUST BE KEPT IN AN ON-SITE REGISTER. THE REGISTER IS TO BE MAINTAINED UP TO DATE FOR THE DURATION OF THE APPROVED WORKS & BE AVAILABLE ON-SITE FOR INSPECTION BY THE RELEVANT REGULATORY AUTHORITY ON REQUEST.
8. AT NOMINATED INSTREAM WATER MONITORING SITES, A MINIMUM OF 3 WATER SAMPLES MUST BE TAKEN & ANALYSED, & THE AVERAGE RESULT USED TO DETERMINE QUALITY.
9. ALL ENVIRONMENTALLY RELEVANT INCIDENTS MUST BE RECORDED IN A FIELD LOG THAT MUST REMAIN ACCESSIBLE TO ALL RELEVANT REGULATORY AUTHORITIES.
10. WASHING/FLUSHING OF SEALED ROADWAYS MUST ONLY OCCUR WHERE SWEEPING HAS FAILED TO REMOVE SUFFICIENT SEDIMENT & THERE IS A COMPELLING NEED TO REMOVE THE REMAINING SEDIMENT (E.G. FOR SAFETY REASONS). IN SUCH CIRCUMSTANCES, ALL REASONABLE & PRACTICABLE SEDIMENT CONTROL MEASURES MUST BE USED TO PREVENT, OR AT LEAST MINIMISE, THE RELEASE OF SEDIMENT INTO RECEIVING WATERS. ONLY THOSE MEASURES THAT WILL NOT CAUSE SAFETY & PROPERTY FLOODING ISSUES SHALL BE EMPLOYED. SEDIMENT REMOVED FROM ROADWAYS MUST BE DISPOSED OF IN

A LAWFUL MANNER THAT DOES NOT CAUSE ONGOING SOIL EROSION OR ENVIRONMENTAL HARM.

11. ALL SEEDING, HYDROSEEDING & TURFING REQUIRES REGULAR WATERING UNTIL EFFECTIVE COVER IS ESTABLISHED & PLANTS ARE GROWING VIGOROUSLY. WATERING SHOULD DEPEND ON WEATHER & SOIL CONDITIONS. WATERING SHOULD START IMMEDIATELY AFTER PLANTING & SHOULD COMPLY WITH THE FOLLOWING AS A MINIMUM:
 - i) WEEK 1 3 WATERINGS PER WEEK
 - ii) WEEK 2-6 2 WATERINGS PER WEEK
 - iii) WEEK 7-12 1 WATERING PER WEEK
11. MAINTENANCE MOWING OF ALL ROAD SHOULDERS, TABLE DRAINS, BATTERS & OTHER SURFACES LIKELY TO EXPERIENCE ACCELERATED SOIL EROSION MUST AIM TO LEAVE THE GRASS LENGTH NO SHORTER THAN 50mm WHERE REASONABLE & PRACTICABLE.
12. MAINTENANCE MOWING MUST BE DONE IN A MANNER THAT WILL NOT DAMAGE THE PROFILE OF FORMED, SOFT EDGES, SUCH AS THE CREST OF EARTH EMBANKMENTS.

SEDIMENT BASIN

1. CONSTRUCTED SEDIMENT BASINS MUST BE MAINTAINED & FULLY OPERATIONAL THROUGHOUT THE CONSTRUCTION PERIOD & UNTIL EACH BASIN'S CATCHMENT AREA ACHIEVES 80% GROUND COVER ON ALL SOIL SURFACES.
2. SETTLED SEDIMENT MUST BE REMOVED FROM SEDIMENT BASINS WHEN THE VOLUME OF THE SEDIMENT EXCEEDS THE DESIGNATED SEDIMENT STORAGE VOLUME, OR THE DESIGN MAXIMUM SEDIMENT STORAGE ELEVATION.
3. SEDIMENT BASIN WATER QUALITY SAMPLES MUST BE TAKEN AT A DEPTH NO GREATER THAN 200mm ABOVE THE LEVEL OF SETTLED SEDIMENT BY A SUITABLY QUALIFIED PERSON. WATER TESTING TO BE UNDERTAKEN USING EITHER A HANDHELD PH/TURBIDITY METER OR SAMPLES COLLECTED FOR LABORATORY TESTING PRIOR TO BASIN DEWATERING. ALL LABORATORY TESTING TO BE UNDERTAKEN BY A NATA ACCREDITED LABORATORY.
4. ALL WATER PUMPED FROM THE SEDIMENT BASIN SHALL BE TESTED FOR ENVIRONMENTAL COMPLIANCE AGAINST THE RELEASE CRITERIA IN THE TABLE BELOW (AS A MINIMUM), UNLESS ALTERNATIVE (MORE STRINGENT) STANDARDS ARE SPECIFIED BY THE LOCAL AUTHORITY PRIOR TO RELEASE.

PARAMETER	RELEASE CRITERIA
SUSPENDED SOLIDS	50mg/l MAX
pH	WITHIN RANGE 6.5-8.5
VISUAL AMENITY	NO VISUAL PLUME


5. THE SEDIMENT BASIN SHALL BE TREATED BY FLOCCULATION AFTER ALL RAINFALL EVENTS (> 5mm) USING GYPSUM OR ALUM. MANUAL DOSAGE OF BASIN SHALL BE UNDERTAKEN USING A MINIMUM RATE OF 32kg/100m³ FOR GYPSUM & 15-8kg/100m³ FOR ALUM. HIGHER DOSAGE MAY BE REQUIRED DEPENDING ON SOIL TYPE & APPLICATION TECHNIQUE. ALUM SHALL NOT BE USED WHERE THE CATCHMENT DISCHARGES DIRECTLY TO A WATERWAY.
6. THE CHOSEN FLOCCULANT SHALL BE SPREAD EVENLY OVER THE BASIN SURFACE AREA. THE BASIN WILL REQUIRE A PUMP SYSTEM TO SPRAY SLURRY OF FLOCCULANTS OVER SURFACE AT AN ANGLE OF 10°-20°.
7. THE TREATED BASIN SHALL BE DEWATERED WITH A PUMP SYSTEM WITH A FLOATING INLET TO ENSURE SETTLED SEDIMENT IS NOT ENTRAINED & DISCHARGED. BASIN DEWATERING SHALL OCCUR WITHIN 5 DAYS FROM CONCLUSION OF RAINFALL EVENT.

SITE REHABILITATION


1. ALL DISTURBED AREAS IDENTIFIED AS VERY LOW, LOW, MEDIUM, HIGH, OR EXTREME EROSION RISK MUST BE SUITABLY STABILISED WITHIN 60, 30, 20, 10 OR 5 DAYS RESPECTIVELY, OR PRIOR TO ANTICIPATED RAINFALL, WHICHEVER IS THE GREATER, FROM THE DAY THAT SOIL DISTURBANCES ON THE AREA HAVE BEEN FINALISED.
2. THE TYPE OF GROUND COVER APPLIED TO COMPLETED EARTHWORKS SHOULD BE COMPATIBLE WITH THE ANTICIPATED LONG-TERM LAND USE, ENVIRONMENTAL RISK, & SITE REHABILITATION MEASURES.
3. UNLESS OTHERWISE DIRECTED BY SUPERINTENDENT OR WHERE DIRECTED BY THE APPROVED REVEGETATION PLAN, TOPSOIL MUST BE PLACED AT A MINIMUM DEPTH OF 75mm ON SLOPES 4:1 (H:V) OR FLATTER, & 50mm ON SLOPES STEEPER THAN 4:1.
4. THE PH LEVEL (SOIL:WATER 1:5) OF TOPSOIL MUST BE ADEQUATE TO ENABLE ESTABLISHMENT & GROWTH OF THE SPECIFIED VEGETATION.
5. SOIL AMELIORANTS MUST BE ADDED TO THE SOIL IN ACCORDANCE WITH THE APPROVED LANDSCAPE/REVEGETATION PLANS &/OR SOIL ANALYSIS.
6. SOIL DENSITY/COMPACTION MUST BE ADJUSTED PRIOR TO SEEDING/PLANTING IN ACCORDANCE WITH THE RELEVANT SPECIFICATIONS, SOIL REPORT &/OR APPROPRIATE REFERENCE PLANS.
7. ALL UNSTABLE OR DISTURBED SOIL SURFACES MUST BE ADEQUATELY STABILISED AGAINST EROSION (MINIMUM 80%) PRIOR TO COMMENCEMENT OF USE, OR SURVEY PLAN ENDORSEMENT.
8. ALL TEMPORARY DRAINAGE, EROSION & SEDIMENT CONTROL MEASURES MUST BE REMOVED AFTER ACHIEVING A SATISFACTORY "OFF-MAINTENANCE INSPECTION" BY THE RELEVANT REGULATORY AUTHORITY.
9. DISPOSE OF ANY COLLECTED SEDIMENT OR FILL IN A LAWFUL MANNER THAT DOES NOT CAUSE ONGOING SOIL EROSION OR ENVIRONMENTAL HARM.
10. IMMEDIATELY PRIOR TO THE CONSTRUCTION OF THE PERMANENT STORMWATER TREATMENT DEVICE, APPROPRIATE FLOW BYPASS CONDITIONS MUST BE ESTABLISHED TO PREVENT SEDIMENT-LADEN WATER ENTERING THE DEVICE.
11. IMMEDIATELY FOLLOWING THE CONSTRUCTION OF THE FILTER MEDIA OF THE PERMANENT STORMWATER TREATMENT DEVICE, THE FILTER MEDIA MUST BE COVERED BY HEAVY-DUTY FILTER CLOTH (MINIMUM BIDUN A4.4 OR EQUIVALENT) & A MINIMUM 200mm LAYER OF EARTH OR SACRIFICIAL FILTER MEDIA. SUCH EARTH & FILTER CLOTH MUST NOT BE REMOVED FROM THE DEVICE UNTIL SUITABLE SURFACE CONDITIONS BEING ACHIEVED WITHIN THE BASIN'S CATCHMENT AREA.
12. IMMEDIATELY FOLLOWING THE CONSTRUCTION OF THE PERMANENT STORMWATER TREATMENT DEVICE AN APPROPRIATE TYPE 2 SEDIMENT TRAP MUST BE INSTALLED IN A MANNER TO PREVENT SEDIMENT INTRUSION INTO THE DEVICE.
13. THE MINIMUM SEDIMENT CONTROL STANDARD FOR THE PROTECTION OF THE PERMANENT STORMWATER TREATMENT DEVICE DURING THE CONSTRUCTION & MAINTENANCE PHASES IS A TYPE 2 SEDIMENT TRAP. (ALTERNATIVE TO ABOVE)
14. PLANT ESTABLISHMENT WITHIN THE PERMANENT STORMWATER TREATMENT DEVICE MUST BE DELAYED UNTIL SEDIMENT INTRUSION INTO THE DEVICE IS SUITABLY UNDER CONTROL.
15. UPON SUITABLE CONDITIONS BEING ACHIEVED WITHIN THE BASIN'S CATCHMENT AREA, THE OPERATIONAL FEATURES OF THE PERMANENT STORMWATER TREATMENT SYSTEM MUST BE MADE FULLY OPERATIONAL (I.E. MAINTENANCE &/OR RECONSTRUCTION AS REQUIRED).
16. THE PERMANENT STORMWATER TREATMENT FEATURES OF THE REHABILITATED BASIN MUST NOT BE MADE OPERATIONAL UNTIL ALL UP-SLOPE SITE STABILISATION MEASURES HAVE BEEN IMPLEMENTED & ARE APPROPRIATELY WORKING TO CONTROL SOIL EROSION & SEDIMENT RUNOFF IN ACCORDANCE WITH THE SPECIFIED EROSION & SEDIMENT CONTROL STANDARD. (ALTERNATIVE TO ABOVE).

WATER QUALITY OBJECTIVES


1. WATER DISCHARGED FROM THE SITE IS TO COMPLY WITH THE [STATE PLANNING POLICY, 2017 AND XXXX] TO ENSURE THAT NO DETRIMENTAL IMPACTS ON WATER QUALITY AND THE ENVIRONMENT OCCUR DURING THE CONSTRUCTION PHASE.
2. THE QUALITY OF DISCHARGE FROM THE SITE TO SATISFY THE FOLLOWING WATER QUALITY OBJECTIVES (WQOS):
 - i) 50MG/L OF TOTAL SUSPENDED SOLIDS (TSS) AS A MAXIMUM CONCENTRATION;
 - ii) TURBIDITY (NTU) VALUE LESS THAN 10% ABOVE BACKGROUND;
 - iii) PH VALUE MUST BE IN THE RANGE 6.5 TO 8.5 EXCEPT WHERE, AND TO THE EXTENT THAT THE NATURAL RECEIVING WATERS LIE OUTSIDE THIS RANGE.
 - iv) OILS AND GREASE - NO VISIBLE FILMS OR ODOUR.
 - v) LITTER - NO VISIBLE LITTER WASHED OR BLOWN FROM THE SITE.
3. IT IS RECOMMENDED THAT A SITE-SPECIFIC RELATIONSHIP BETWEEN TURBIDITY AND SUSPENDED SOLIDS IS DETERMINED TO ALLOW FOR TESTING PRIOR TO RELEASE USING A TURBIDITY TUBE OR CALIBRATED TURBIDITY METER. THIS HAS THE ADVANTAGE OF PROVIDING IMMEDIATE ASSESSMENT TO JUSTIFY A RELEASE RATHER THAN WAITING FOR LABORATORY RESULTS TO CONFIRM CONCENTRATION LEVELS AND COMPLIANCE. NOTE THAT POST-RELEASE TSS VALIDATION IS APPROPRIATE TO DEMONSTRATE THAT THE NTU/TSS CORRELATION IS BEING MAINTAINED.
4. BACKGROUND REFERS TO RECEIVING WATER QUALITY IMMEDIATELY UPSTREAM OF THE SITE LOCATION RELEASE POINT AT THE TIME OF THE RELEASE. WHERE THERE IS NO IMMEDIATE UPSTREAM RECEIVING WATER AT THE LOCATION AND TIME OF THE RELEASE, THEN THE TURBIDITY RELEASE LIMIT (NTU) WILL BE EQUAL TO THE RELEASE LIMIT FOR 50MG/L TOTAL SUSPENDED SOLIDS (TSS) BASED UPON THE ONSITE CORRELATION BETWEEN TSS AND NTU.

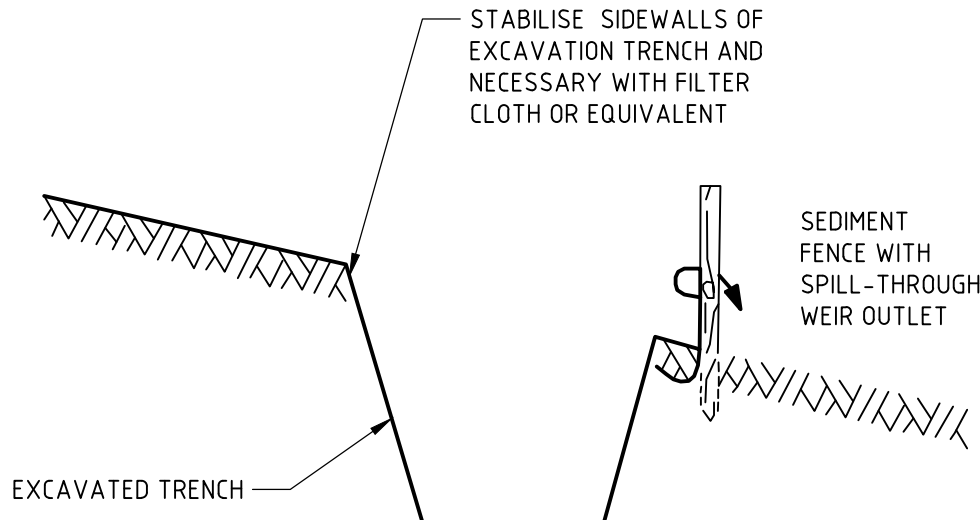


SEDIMENT TRENCH WITH SEDIMENT OUTLET STRUCTURE

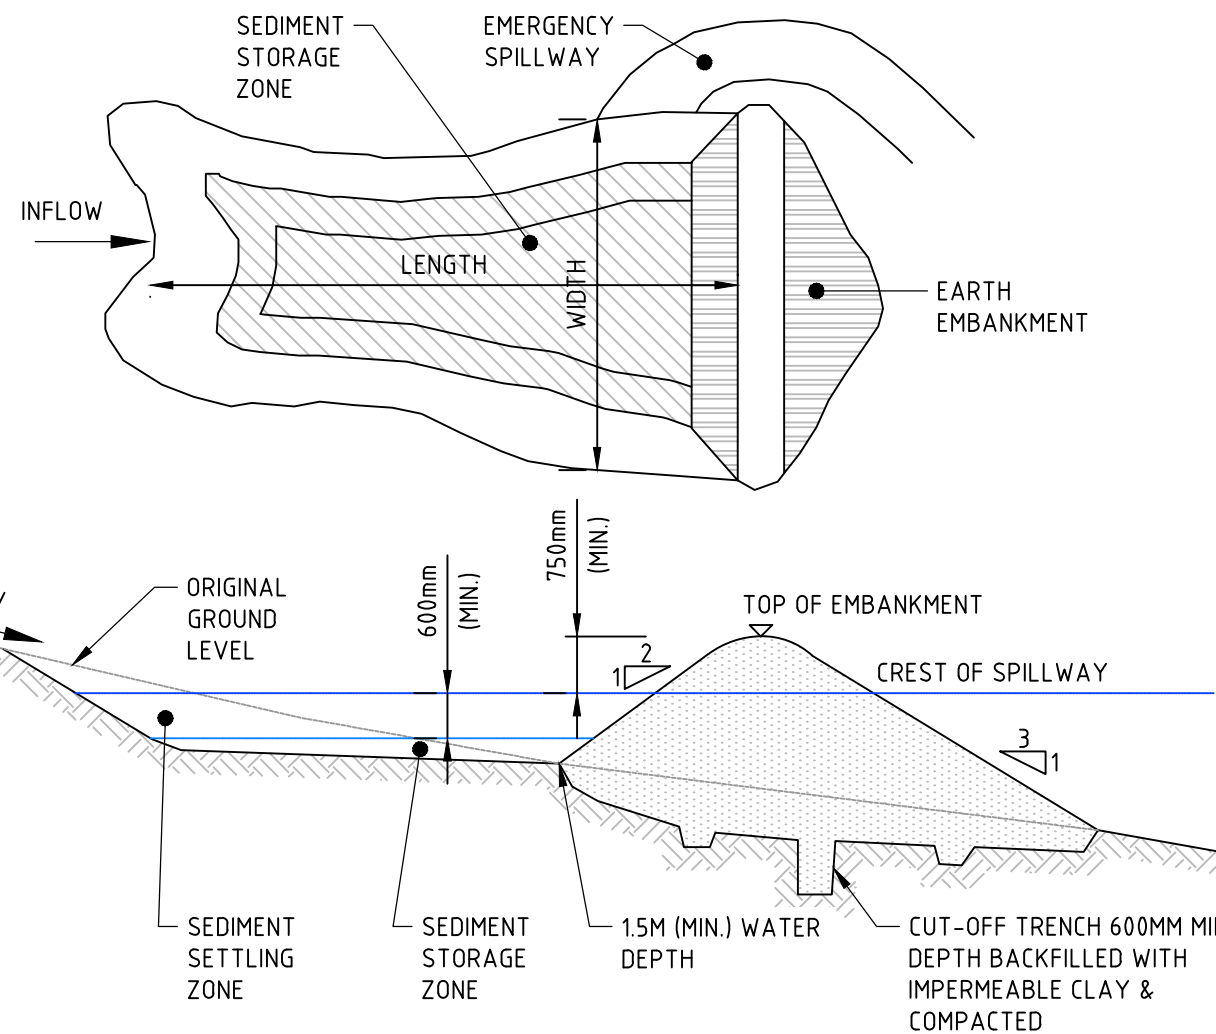

SEDIMENT BASIN

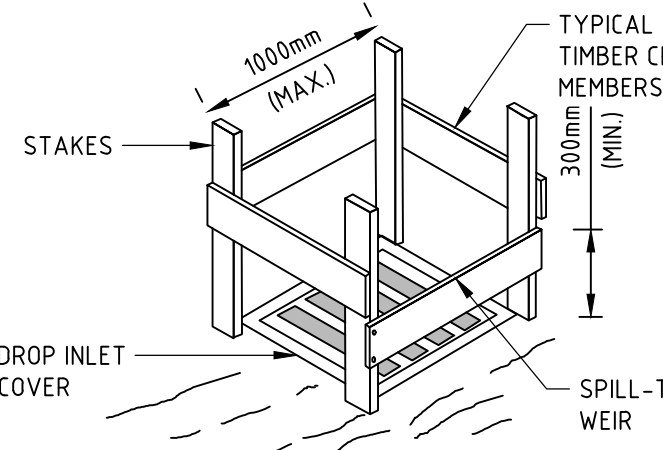


DETAILS OF SUPPORT FRAME WITH SPILL-THROUGH WEIR

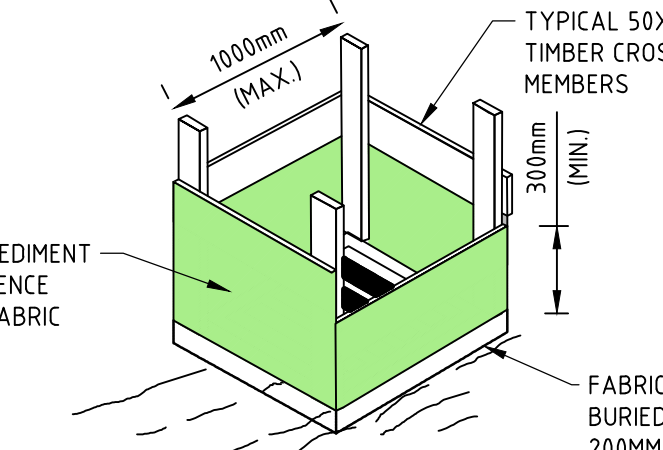


FABRIC DROP INLET PROTECTION WITH SPILL-THROUGH WEIR


FABRIC DROP INLET PROTECTION

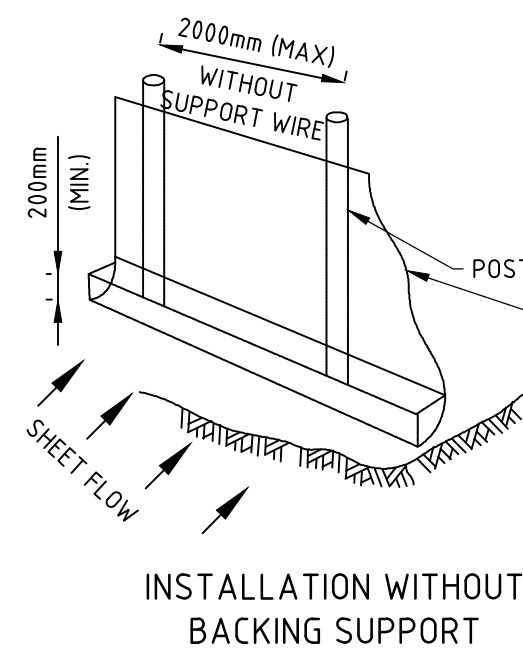


INSTALLATION WITHOUT BACKING SUPPORT

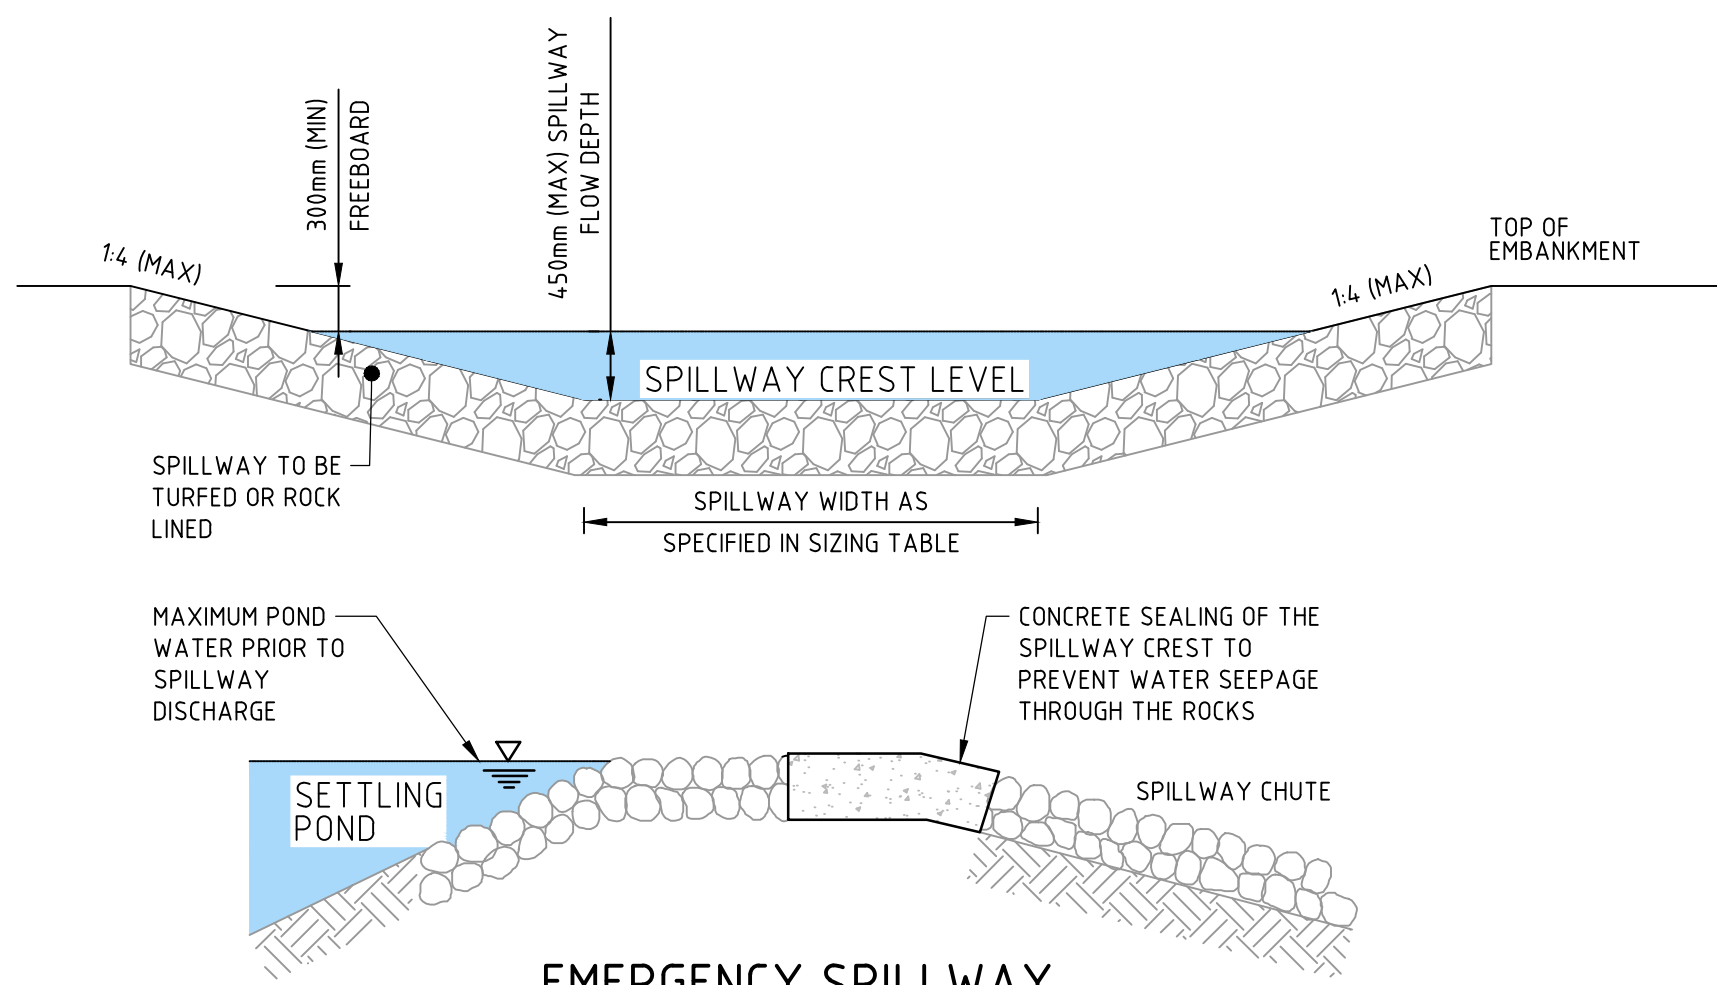


EMERGENCY SPILLWAY

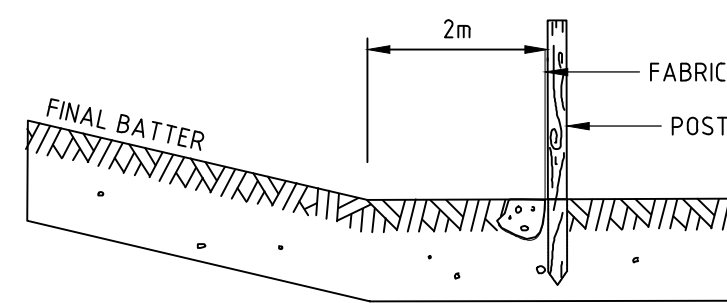


LOCATION OF FENCE RELATIVE TO BASE OF SLOPE

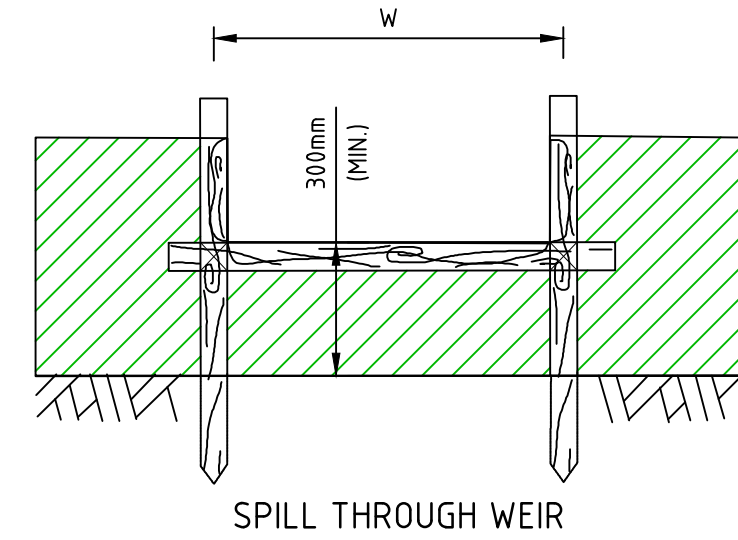


SPILL THROUGH WEIR

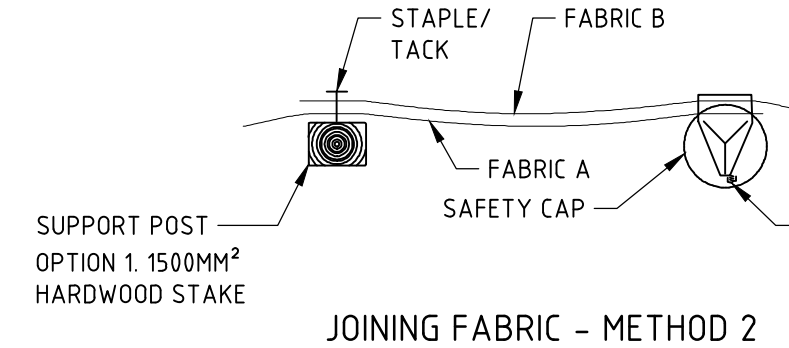


JOINING FABRIC - METHOD 2

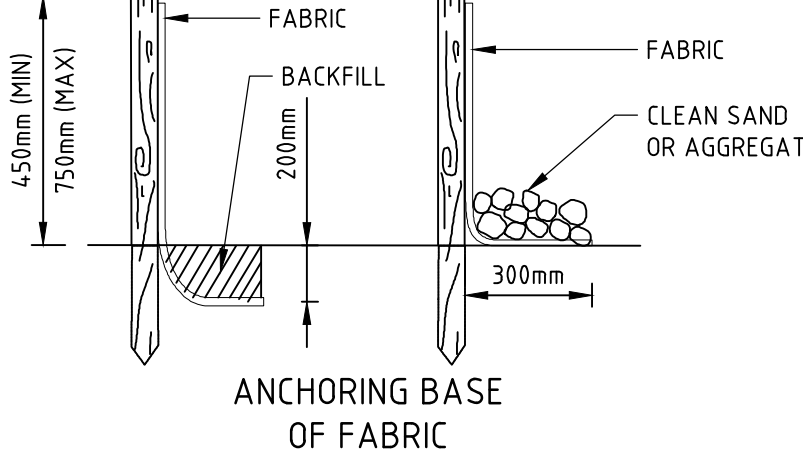

ANCHORING BASE OF FABRIC

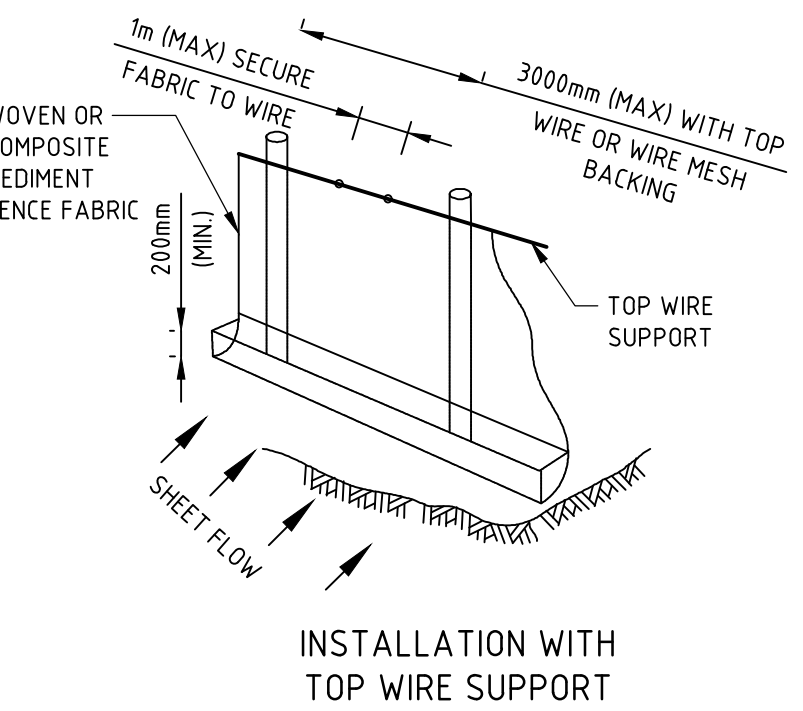


INSTALLATION WITH TOP WIRE SUPPORT



JOINING FABRIC - METHOD 1

FABRIC TO FOLD AROUND EACH STAKE ONE FULL TURN. STAKE B TO BE DRIVEN TIGHTLY AGAINST STAKE A. THE TOPS OF BOTH STAKES TO BE SECURED WITH WIRE.

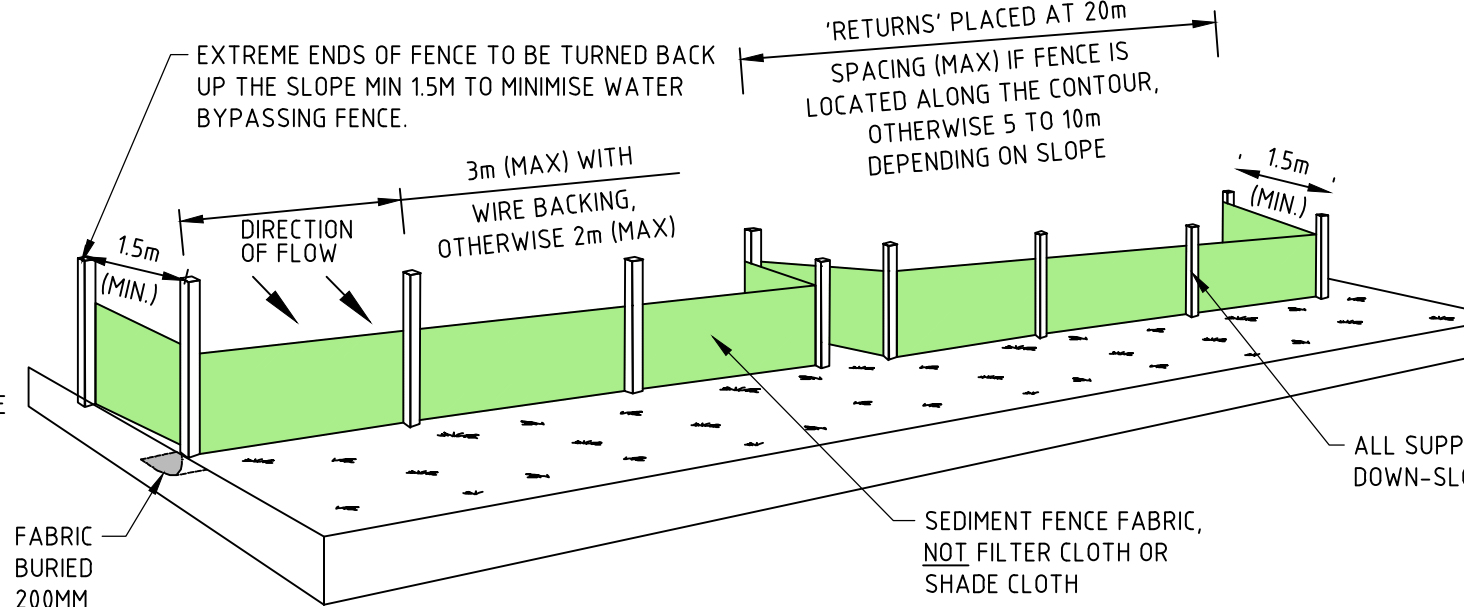

INSTALLATION OF SEDIMENT FENCE

SEDIMENT FENCE

NOT FOR CONSTRUCTION