GENERAL

1. EROSION AND SEDIMENT CONTROL MEASURES SHOWN ON THE DRAWINGS ARE MINIMUM REQUIREMENTS BASED ON THE UNDERSTOOD CONSTRUCTION SCOPE AND METHODOLOGY. IT IS THE CONTRACTORS RESPONSIBILITY AT ALL TIMES TO EMPLOY APPROPRIATE EROSION AND SEDIMENT CONTROL MEASURES BASED ON THE CONSTRUCTION METHODOLOGY, SEQUENCING OF WORKS AND LOCAL SITE CONDITIONS TO THE APPROVAL OF THE AUTHORISING AUTHORITY
2. IT IS THE CONTRACTORS RESPONSIBILITY TO ENSURE INSPECTION, MAINTENANCE & TESTING OF ALL DRAINAGE, EROSION & SEDIMENT CONTROL MEASURES ARE UNDERTAKEN ON SITE.
3. ALL DRAINAGE, EROSION & SEDIMENT CONTROL MEASURES MUST BE APPLIED & MAINTAINED IN ACCORDANCE WITH THE LATEST INTERNATIONAL EROSION CONTROL ASSOCIATION (IECA) AUSTRALASIA BEST PRACTICE EROSION & SEDIMENT CONTROL (BPESC) DOCUMENT.
4. REFER TO APPROVED PLANS FOR LOCATION, EXTENT, & CONSTRUCTION DETAILS. IF THERE ARE QUESTIONS OR PROBLEMS WITH THE LOCATION, EXTENT, OR METHOD OF INSTALLATION, CONTACT THE ENGINEER OR RESPONSIBLE ON-SITE OFFICER FOR ASSISTANCE.
5. ADDITIONAL EROSION & SEDIMENT CONTROL MEASURES MUST BE IMPLEMENTED & A REVISED EROSION & SEDIMENT CONTROL PLAN (ESCP) MUST BE SUBMITTED FOR APPROVAL IN THE EVENT THAT SITE CONDITIONS CHANGE SIGNIFICANTLY FROM THOSE CONSIDERED WITHIN THIS ESCP.
6. IN CIRCUMSTANCES WHERE IT IS CONSIDERED NECESSARY TO PREPARE AN AMENDED EROSION & SEDIMENT CONTROL PLAN (ESCP), & WHERE THE DELIVERY OF SUCH AN AMENDED ESCP IS NOT IMMINENT, THEN ALL NECESSARY NEW OR MODIFIED EROSION & SEDIMENT CONTROL WORKS MUST BE IN ACCORDANCE WITH THE LATEST VERSION OF THE IECA BPESC DOCUMENT. UPON APPROVAL OF THE AMENDED ESCP, ALL WORKS MUST BE IMPLEMENTED IN ACCORDANCE WITH THE AMENDED PLAN.
7. WHERE THERE IS A HIGH PROBABILITY THAT SERIOUS OR MATERIAL ENVIRONMENTAL HARM MAY OCCUR AS A RESULT OF SEDIMENT LEAVING THE SITE, APPROPRIATE ADDITIONAL EROSION & SEDIMENT CONTROL MEASURES MUST BE IMPLEMENTED SUCH THAT ALL REASONABLE & PRACTICABLE MEASURES ARE BEING TAKEN TO PREVENT OR MINIMISE SUCH HARM. ONLY THOSE WORKS NECESSARY TO MINIMISE OR PREVENT ENVIRONMENTAL HARM SHALL BE CONDUCTED ON-SITE PRIOR TO APPROVAL OF THE AMENDED EROSION & SEDIMENT CONTROL PLAN (ESCP).
8. AT ALL TIMES THE CONTRACTOR SHALL MONITOR THE PREVAILING WEATHER CONDITIONS & PROTECT ANY DOWNSTREAM CONSTRUCTION OR RECEIVING ENVIRONMENTS.
9. WORKS SHALL BE COMPLETED ON SITE GENERALLY IN ACCORDANCE WITH THE FOLLOWING SCHEDULE:
 (i) PRE CONSTRUCTION - CONSTRUCT SILT FENCES PRIOR TO PRE-START MEETING, WHICH WILL PROTECT EXISTING DOWNSTREAM PROPERTIES, PARKS OR ROAD RESERVES FROM SEDIMENTATION & EROSION.
 (ii) CLEARING & BULK EARTHWORKS - CONSTRUCT & MAINTAIN SILT FENCES WHICH CONTROL SEDIMENTATION & EROSION DURING CLEARING & BULK EARTHWORKS. ALL DISTURBED AREAS TO BE EITHER GRASS SEEDED OR TURFED, AS SPECIFIED, AS SOON AS POSSIBLE OR WITHIN 7 DAYS OF FINAL TRIMMING OF EARTHWORKS.
 (iii) MAINTENANCE PERIOD - CONSTRUCT & MAINTAIN SILT MANAGEMENT CONTROLS WHICH CONTROL SEDIMENTATION & EROSION PRIOR TO THE ESTABLISHMENT OF GRASS COVER & REHABILITATION. PROVIDE GRASS FILTER STRIPS IN LOCATIONS AS SHOWN ON EROSION & SEDIMENT CONTROL PLANS.
10. EROSION & SEDIMENT CONTROL PROTECTION MEASURES SHALL BE MAINTAINED BY THE CONTRACTOR THROUGHOUT THE CONTRACT.

RECOMMENDED IMPLEMENTATION SEQUENCE & STAGING

1 ALL EROSION & SEDIMENT CONTROL MEASURES SHALL BE INSTALLED & FUNCTIONAL PRIOR TO WORKS COMMENCING & IN THE FOLLOWING SEQUENCE:
 a. CONSTRUCT TEMPORARY STABILISED SITE ACCESS
 b. PROVIDE INLET PROTECTION TO STORMWATER INLETS & GULLIES ON ALL ROADS ADJOIN THE SITE.
 c. CONSTRUCT BARRIER FENCING AROUND RESTRICTED 'NO-GO' ZONES OF THE RETAINED VEGETATION & AREAS NOT TO BE DISTURBED & AREAS WHICH REMAIN UN-WORKED.
 d. INSTALL ALL TEMPORARY SEDIMENT FENCES
 e. CONSTRUCT DIVERSION BANKS AS NECESSARY (PARALLEL TO CONTOURS) TO DIVERT RUNOFF FROM DISTURBED AREAS INTO THE SEDIMENT PONDS/BASINS
 f. WORK AREAS TO BE DELINEATED BY BARRIER FENCING & DIVERSION CHANNEL UPSLOPE & SEDIMENT FENCING DOWNSLOPE.
 g. MAINTAIN EXISTING SEDIMENT PONDS/BASINS AS LONG AS PRACTICALLY POSSIBLE
 h. STABILISE ALL DISTURBED AREAS ASAP & PROGRESSIVELY AS WORKS ARE COMPLETED.
 i. TEMPORARY STABILISATION TO BE DONE USING MULCHING, HYDROMULCHING, HYDROSEEDING OR DIRECT SEEDING TO GIVE A 70% COVERAGE OF GROUND SURFACE WITHIN 14 DAYS OF WORKS COMPLETING (EVEN IF WORKS MAY CONTINUE LATER)

2 EROSION & SEDIMENT CONTROL PROTECTION MEASURES MAY NEED TO BE REVISED & UPDATED TO REFLECT THE SITE CONDITIONS & PROGRESSION OF THE WORKS, I.E. MEASURES INCLUDING SEDIMENT FENCES SHOULD BE MOVED & REINSTATED AS WORKS PROGRESS.

SITE MANAGEMENT

1. ALL OFFICE FACILITIES & OPERATIONAL ACTIVITIES MUST BE LOCATED SUCH THAT ANY LIQUID EFFLUENT (E.G. PROCESS WATER, WASH-DOWN WATER, EFFLUENT FROM EQUIPMENT CLEANING, OR PLANT WATERING), CAN BE TOTALLY CONTAINED & TREATED WITHIN THE SITE.
2. THE CONSTRUCTION SCHEDULE MUST AIM TO MINIMISE THE DURATION THAT ANY & ALL AREAS OF SOIL ARE EXPOSED TO THE EROSIVE EFFECTS OF WIND, RAIN & SURFACE WATER.
3. LAND-DISTURBING ACTIVITIES MUST BE UNDERTAKEN IN ACCORDANCE WITH THE ESCP & ASSOCIATED DEVELOPMENT CONDITIONS.
4. LAND-DISTURBING ACTIVITIES MUST BE UNDERTAKEN IN SUCH A MANNER THAT ALLOWS ALL REASONABLE & PRACTICABLE MEASURES TO BE UNDERTAKEN TO:
 (i) ALLOW STORMWATER TO PASS THROUGH THE SITE IN A CONTROLLED MANNER & AT NON-EROSIVE FLOW VELOCITIES UP TO THE SPECIFIED DESIGN STORM DISCHARGE;
 (ii) MINIMISE SOIL EROSION RESULTING FROM RAIN, WATER FLOW &/OR WIND;
 (iii) MINIMISE ADVERSE EFFECTS OF SEDIMENT RUNOFF, INCLUDING SAFETY ISSUES;
 (iv) PREVENT, OR AT LEAST MINIMISE, ENVIRONMENTAL HARM RESULTING FROM WORK-RELATED SOIL EROSION & SEDIMENT RUNOFF;
 (v) ENSURE THAT THE VALUE & USE OF LAND/PROPERTIES ADJACENT TO THE DEVELOPMENT (INCLUDING ROADS) ARE NOT DIMINISHED AS A RESULT OF THE ADOPTED EROSION & SEDIMENT CONTROL MEASURES.
5. ALL EROSION & SEDIMENT CONTROL MEASURES MUST CONFORM TO THE STANDARDS & SPECIFICATIONS CONTAINED IN:
 (i) THE DEVELOPMENT APPROVAL CONDITION ISSUED BY THE RELEVANT REGULATORY AUTHORITY; &
 (ii) THE APPROVED ESCP & SUPPORTING DOCUMENTATION; OR
 (iii) THE LATEST VERSION OF THE IECA BPESC DOCUMENT, IF THE STANDARDS & SPECIFICATIONS ARE NOT CONTAINED IN THE APPROVED ESCP.
6. ANY WORKS THAT MAY CAUSE SIGNIFICANT SOIL DISTURBANCE & ARE ANCILLARY TO ANY ACTIVITY FOR WHICH REGULATORY BODY APPROVAL IS REQUIRED, MUST NOT COMMENCE BEFORE THE ISSUE OF THAT APPROVAL.
7. ADDITIONAL &/OR ALTERNATIVE EROSION & SEDIMENT CONTROL MEASURES MUST BE IMPLEMENTED IN THE EVENT THAT SITE INSPECTIONS, THE SITE'S MONITORING & MAINTENANCE PROGRAM, OR THE REGULATORY AUTHORITY, IDENTIFIES THAT UNACCEPTABLE OFF-SITE SEDIMENTATION IS OCCURRING AS A RESULT OF THE WORK ACTIVITIES.
8. LAND-DISTURBING ACTIVITIES MUST NOT CAUSE UNNECESSARY SOIL DISTURBANCE IF AN ALTERNATIVE CONSTRUCTION PROCESS IS AVAILABLE THAT ACHIEVES THE SAME OR EQUIVALENT OUTCOMES AT AN EQUIVALENT COST.
9. SEDIMENT (INCLUDING CLAY, SILT, SAND, GRAVEL, SOIL, MUD, CEMENT & CERAMIC WASTE) DEPOSITED OFF THE SITE AS A DIRECT RESULT OF AN ON-SITE ACTIVITY, MUST BE COLLECTED & THE AREA APPROPRIATELY CLEANED/REHABILITATED AS SOON AS REASONABLE & PRACTICABLE, & IN A MANNER THAT GIVES APPROPRIATE CONSIDERATION TO THE SAFETY & ENVIRONMENTAL RISKS ASSOCIATED WITH THE SEDIMENT DEPOSITION.
10. WHEREVER REASONABLE & PRACTICABLE, BRICK, TILE & MASONRY CUTTING MUST BE CARRIED OUT ON A PERVIOUS SURFACE, SUCH AS GRASS, OR OPEN SOIL, OR IN SUCH A MANNER THAT ALL SEDIMENT-LADEN RUNOFF IS PREVENTED FROM DISCHARGING INTO A GUTTER, DRAIN, OR WATER BODY.
11. ADEQUATE WASTE COLLECTION BINS MUST BE PROVIDED ON-SITE & MAINTAINED SUCH THAT POTENTIAL & ACTUAL ENVIRONMENTAL HARM RESULTING FROM SUCH MATERIAL WASTE IS MINIMISED.
12. CONCRETE WASTE & CHEMICAL PRODUCTS, INCLUDING PETROLEUM & OIL-BASED PRODUCTS, MUST BE PREVENTED FROM ENTERING AN INTERNAL WATER BODY, OR AN EXTERNAL DRAIN, STORMWATER SYSTEM, OR WATER BODY.
13. ALL FLAMMABLE & COMBUSTIBLE LIQUIDS, INCLUDING ALL LIQUID CHEMICALS IF SUCH CHEMICALS COULD POTENTIALLY BE WASHED OR DISCHARGED FROM THE SITE, ARE STORED & HANDLED ON-SITE IN ACCORDANCE WITH RELEVANT STANDARDS SUCH AS AS1940 THE STORAGE & HANDLING OF FLAMMABLE & COMBUSTIBLE LIQUIDS.
14. TRENCHES NOT LOCATED WITHIN ROADWAYS MUST BE BACKFILLED, CAPPED WITH TOPSOIL, & COMPACTED TO A LEVEL AT LEAST 75mm ABOVE ADJOINING GROUND LEVEL & APPROPRIATELY STABILISED.
15. ALL STORMWATER, SEWER LINE & OTHER SERVICE TRENCHES, NOT LOCATED WITHIN ROADWAYS, MUST BE MULCHED & SEEDED, OR OTHERWISE APPROPRIATELY STABILISED WITHIN 7 DAYS AFTER BACKFILL.
16. NO MORE THAN 150m OF A STORMWATER, SEWER LINE OR OTHER SERVICE TRENCH MUST TO BE OPEN AT ANY ONE TIME.
17. SITE SPOIL MUST BE LAWFULLY DISPOSED OF IN A MANNER THAT DOES NOT RESULT IN ONGOING SOIL EROSION OR ENVIRONMENTAL HARM.
18. ALL FILL MATERIAL PLACED ON SITE MUST COMPRISE ONLY NATURAL EARTH & ROCK, & IS TO BE FREE OF CONTAMINANTS, BE FREE DRAINING, & BE COMPACTED IN LAYERS NOT EXCEEDING 300mm TO 95% STANDARD RELATIVE DRY DENSITY IN ACCORDANCE WITH AS1289.
19. FOOT & VEHICULAR TRAFFIC WILL BE RESTRICTED IN RECENTLY STABILISED AREAS INCLUDING THOSE HYDROSEEDED, TURFED OR GRASS SEEDED.
20. TEMPORARY SITE STABILISATION PROCEDURES MUST COMMENCE AT LEAST 30 DAYS PRIOR TO THE NOMINATED SITE SHUTDOWN DATE. AT LEAST 70% STABLE COVER OF ALL UNSTABLE &/OR DISTURBED SOIL SURFACES MUST BE ACHIEVED PRIOR TO SHUTDOWN. THE STABILISATION WORKS MUST NOT RELY UPON THE LONGEVITY OF NON-VEGETATED EROSION CONTROL BLANKETS, OR TEMPORARY SOIL BINDERS.
21. IF BIO-RETENTION FILTER MEDIA IS INSTALLED PRIOR TO 80% OF THE UPSTREAM CATCHMENT BEING FULLY DEVELOPED, THE FILTER MEDIA SHALL BE PROTECTED WITH A LAYER OF GEOFABRIC WITH TURF ON TOP.

LAND CLEARING

1. LAND CLEARING MUST BE DELAYED AS LONG AS PRACTICABLE & MUST BE UNDERTAKEN IN CONJUNCTION WITH DEVELOPMENT OF EACH STAGE OF WORKS, UNLESS OTHERWISE APPROVED BY SUPERINTENDENT.
2. ALL REASONABLE & PRACTICABLE EFFORTS MUST BE TAKEN TO DELAY THE REMOVAL OF, OR DISTURBANCE TO, EXISTING GROUND COVER (ORGANIC OR INORGANIC) PRIOR TO LAND-DISTURBING ACTIVITIES.
6. BULK TREE CLEARING MUST OCCUR IN A MANNER THAT MINIMISES DISTURBANCE TO EXISTING GROUND COVER (ORGANIC OR INORGANIC).
7. BULK TREE CLEARING & GRUBBING OF THE SITE MUST BE IMMEDIATELY FOLLOWED BY SPECIFIED TEMPORARY STABILISATION MEASURES (E.G. TEMPORARY GRASSING, OR MULCHING) PRIOR TO COMMENCEMENT OF EACH STAGE OF CONSTRUCTION WORKS.
8. DISTURBANCE TO NATURAL WATERCOURSES (INCLUDING BED & BANKS) & THEIR ASSOCIATED RIPARIAN ZONES MUST BE LIMITED TO THE MINIMUM PRACTICABLE.
9. NO LAND CLEARING SHALL BE UNDERTAKEN UNLESS PRECEDED BY THE INSTALLATION OF ADEQUATE DRAINAGE & SEDIMENT CONTROL MEASURES, UNLESS SUCH CLEARING IS REQUIRED FOR THE PURPOSE OF INSTALLING SUCH MEASURES, IN WHICH CASE, ONLY THE MINIMUM CLEARING REQUIRED TO INSTALL SUCH MEASURES SHALL OCCUR.
10. LAND CLEARING MUST BE LIMITED TO 5M FROM THE EDGE OF PROPOSED CONSTRUCTED WORKS, 2M OF ESSENTIAL CONSTRUCTION TRAFFIC ROUTES, & A TOTAL OF 10M WIDTH FOR CONSTRUCTION ACCESS, UNLESS OTHERWISE APPROVED BY SUPERINTENDENT.
11. PRIOR TO LAND CLEARING, AREAS OF PROTECTED VEGETATION, & SIGNIFICANT AREAS OF RETAINED VEGETATION MUST BE CLEARLY IDENTIFIED (E.G. WITH HIGH-VISIBILITY TAPE, OR LIGHT FENCING) FOR THE PURPOSES OF MINIMISING THE RISK OF UNNECESSARY LAND CLEARING.
12. ALL REASONABLE & PRACTICABLE MEASURES MUST BE TAKEN TO MINIMISE THE REMOVAL OF, OR DISTURBANCE TO, THOSE TREES, SHRUBS & GROUND COVERS (ORGANIC OR INORGANIC) THAT ARE INTENDED TO BE RETAINED.
13. ALL LAND CLEARING MUST BE IN ACCORDANCE WITH THE FEDERAL, STATE & LOCAL GOVERNMENT VEGETATION PROTECTION/PRESERVATION REQUIREMENTS &/OR POLICIES.
14. LAND CLEARING IS LIMITED TO THE MINIMUM PRACTICABLE DURING THOSE PERIODS WHEN SOIL EROSION DUE TO WIND, RAIN OR SURFACE WATER IS POSSIBLE.
15. LAND CLEARING MUST NOT EXTEND BEYOND THAT NECESSARY TO PROVIDE UP TO EIGHT (8) WEEKS OF SITE ACTIVITY DURING THOSE MONTHS WHEN THE ACTUAL OR AVERAGE RAINFALL IS LESS THAN 45mm, SIX (6) IF BETWEEN 45 & 100mm, FOUR (4) WEEKS IF BETWEEN 100 & 225mm, & TWO (2) WEEKS IF GREATER THAN 225mm.
16. NATIVE SITE VEGETATION REQUIRED & APPROVED FOR CLEARING SHOULD BE MULCHED & STOCKPILED FOR LATER USE IN LANDSCAPING, STABILISATION &/OR SITE REHABILITATION WORKS.

SITE ACCESS

1. PRIOR TO THE COMMENCEMENT OF SITE WORKS, THE LOCATION OF THE SITE ACCESS POINT(S) MUST BE VERIFIED WITH THE RELEVANT REGULATORY AUTHORITY.
2. SITE ACCESS MUST BE RESTRICTED TO THE MINIMUM PRACTICAL NUMBER OF LOCATIONS.
3. SITE EXIT POINTS MUST BE APPROPRIATELY MANAGED TO MINIMISE THE RISK OF SEDIMENT BEING TRACKED ONTO SEALED, PUBLIC ROADWAYS.
5. INSTALL SEDIMENT FENCING &/OR BARRIER FENCING TO CONFINE INGRESS TO & EGRESS FROM THE SITE TO STABILISED ACCESS POINTS ONLY.
4. STORMWATER RUNOFF FROM ACCESS ROADS & STABILISED ENTRY/EXIT POINTS MUST DRAIN TO AN APPROPRIATE SEDIMENT CONTROL DEVICE.

CONSTRUCTION EXIT - ROCK PAD

MATERIALS:

1. ROCK: WELL GRADED, HARD, ANGULAR, EROSION RESISTANT ROCK, NOMINAL DIAMETER OF 50 TO 75mm (SMALL DISTURBANCES) OR 100 TO 150mm (LARGE DISTURBANCES). ALL REASONABLE MEASURES MUST BE TAKEN TO OBTAIN ROCK OF NEAR UNIFORM SIZE.
2. FOOTPATH STABILISING AGGREGATE: 25 TO 50mm GRAVEL OR AGGREGATE.
3. GEOTEXTILE FABRIC: HEAVY-DUTY, NEEDLE -PUNCHED, NON-WOVEN FILTER CLOTH ('BIDIM' A24 OR EQUIVALENT).

INSTALLATION:

1. CLEAR THE LOCATION OF THE ROCK PAD, REMOVING STUMPS, ROOTS & OTHER VEGETATION TO PROVIDE A FIRM FOUNDATION SO THAT THE ROCK IS NOT PRESSED INTO SOFT GROUND. CLEAR SUFFICIENT WIDTH TO ALLOW PASSAGE OF LARGE VEHICLES, BUT CLEAR ONLY THAT NECESSARY FOR THE EXIT. DO NOT CLEAR ADJACENT AREAS UNTIL THE REQUIRED EROSION & SEDIMENT CONTROL DEVICES ARE IN PLACE.
2. IF THE EXPOSED SOIL IS SOFT, PLASTIC OR CLAYEY, PLACE A SUB-BASE OF CRUSHED ROCK OR A LAYER OF HEAVY-DUTY FILTER CLOTH TO PROVIDE A FIRM FOUNDATION.
3. PLACE THE ROCK PAD FORMING A MINIMUM 200mm THICK LAYER OF CLEAN, OPEN-VOID ROCK.
4. IF THE ASSOCIATED CONSTRUCTION SITE IS UP-SLOPE OF THE ROCKPAD, THUS CAUSING STORMWATER RUNOFF TO FLOW TOWARD THE ROCK PAD, THEN FORM A MINIMUM 300mm HIGH FLOW CONTROL BERM ACROSS THE ROCK PAD TO DIVERT SUCH RUNOFF TO A SUITABLE SEDIMENT TRAP.
5. THE LENGTH OF THE ROCK PAD SHOULD BE AT LEAST 15m WHERE PRACTICABLE, & AS WIDE AS THE FULL WIDTH OF THE ENTRY OR EXIT & AT LEAST 3m. THE ROCK PAD SHOULD COMMENCE AT THE EDGE OF THE OFF-SITE SEALED ROAD OR PAVEMENT.
6. FLARE THE END THE ROCK PAD WHERE IT MEETS THE PAVEMENT SO THAT THE WHEELS OF TURNING VEHICLES DO NOT TRAVEL OVER UNPROTECTED SOIL.
7. IF THE FOOTPATH IS OPEN TO PEDESTRIAN MOVEMENT, THEN COVER THE COARSE ROCK WITH FINE AGGREGATE OR GRAVEL, OR OTHERWISE TAKE WHATEVER MEASURES ARE NEEDED TO MAKE THE AREA SAFE.

SOIL & STOCKPILE MANAGEMENT

1. TOPSOIL SHALL BE STRIPPED & STOCKPILED FOR LATER USE ONSITE.
2. ALL REASONABLE & PRACTICABLE MEASURES MUST BE TAKEN TO OBTAIN THE MAXIMUM BENEFIT FROM EXISTING TOPSOIL, INCLUDING:
 (i) WHERE THE PROPOSED AREA OF SOIL DISTURBANCE DOES NOT EXCEED 2500m², & THE TOPSOIL DOES NOT CONTAIN UNDESIRABLE WEED SEED, THE TOP 100mm OF SOIL LOCATED WITHIN AREAS OF PROPOSED SOIL DISTURBANCE (INCLUDING STOCKPILE AREAS) MUST BE STRIPPED & STOCKPILED SEPARATELY FROM THE REMAINING SOIL.
 (ii) WHERE THE PROPOSED AREA OF SOIL DISTURBANCE EXCEEDS 2500m², & THE TOPSOIL DOES NOT CONTAIN UNDESIRABLE WEED SEED, THE TOP 50mm OF SOIL MUST BE STRIPPED & STOCKPILED SEPARATELY FROM THE REMAINING TOPSOIL, & SPREAD AS A FINAL SURFACE SOIL.
 (iii) IN AREAS WHERE THE TOPSOIL CONTAINS UNDESIRABLE WEED SEED, THE AFFECTED SOIL MUST BE SUITABLY BURIED OR REMOVED FROM THE SITE.
3. STOCKPILES OF ERODIBLE MATERIAL THAT HAS THE POTENTIAL TO CAUSE ENVIRONMENTAL HARM IF DISPLACED, MUST BE:
 (i) APPROPRIATELY PROTECTED FROM WIND, RAIN, CONCENTRATED SURFACE FLOW & EXCESSIVE UP-SLOPE STORMWATER SURFACE FLOWS.
 (ii) LOCATED AT LEAST 2M (PREFERABLY 5M) FROM ANY HAZARDOUS AREA, RETAINED VEGETATION, ROADS & CONCENTRATED WATER FLOW.
 (iii) LOCATED UP-SLOPE OF AN APPROPRIATE SEDIMENT CONTROL SYSTEM.
 (iv) PROVIDED WITH AN APPROPRIATE PROTECTIVE COVER (SYNTHETIC, MULCH OR VEGETATIVE) IF THE MATERIALS ARE LIKELY TO BE STOCKPILED FOR MORE THAN 28 DAYS.
 (v) PROVIDED WITH AN APPROPRIATE PROTECTIVE COVER (SYNTHETIC, MULCH OR VEGETATIVE) IF THE MATERIALS ARE LIKELY TO BE STOCKPILED FOR MORE THAN 10 DAYS DURING THOSE MONTHS THAT HAVE A HIGH EROSION RISK.
 (vi) PROVIDED WITH AN APPROPRIATE PROTECTIVE COVER (SYNTHETIC, MULCH OR VEGETATIVE) IF THE MATERIALS ARE LIKELY TO BE STOCKPILED FOR MORE THAN 5 DAYS DURING THOSE MONTHS THAT HAVE AN EXTREME EROSION RISK.
4. A SUITABLE FLOW DIVERSION SYSTEM MUST BE ESTABLISHED IMMEDIATELY UP-SLOPE OF A STOCKPILE OF ERODIBLE MATERIAL THAT HAS THE POTENTIAL TO CAUSE ENVIRONMENTAL HARM IF DISPLACED, IF THE UP-SLOPE CATCHMENT AREA DRAINING TO THE STOCKPILE EXCEEDS 1500m².


FILTER SOCKS-CONCENTRATED FLOW

MATERIALS:


1. SOCKS: MINIMUM Φ200mm SYNTHETIC OR BIODEGRADABLE TUBES MANUFACTURED FROM NON-WOVEN OR COMPOSITE FABRIC SUITABLE FOR THE "FILTRATION" OF COURSE SEDIMENT.
2. FILL MATERIALS: STRAW, CANE MULCH, COMPOSTED MATERIAL (AS4454), COARSE SAND, OR CLEAN AGGREGATE

INSTALLATION:

1. ENSURE THE SOCKS ARE PLACED INDIVIDUALLY OR COLLECTIVELY (AS A SINGLE SEDIMENT TRAP) SUCH THAT:
 (i) LEAKAGE AROUND OR UNDER THE SOCKS IS MINIMISED;
 (ii) ADJOINING SOCKS ARE TIGHTLY BUTTED OR OVERLAPPED AT LEAST 450mm.
 (iii) THE SURFACE AREA OF POTENTIAL WATER PONDING UP-SLOPE OF EACH SEDIMENT TRAP IS MAXIMISED.
 (iv) TO THE MAXIMUM DEGREE PRACTICAL, ALL SEDIMENT-LADEN WATER WILL PASS THROUGH THE FORMED POND BEFORE FLOWING OVER THE DOWN-SLOPE END OF THE SEDIMENT TRAP.

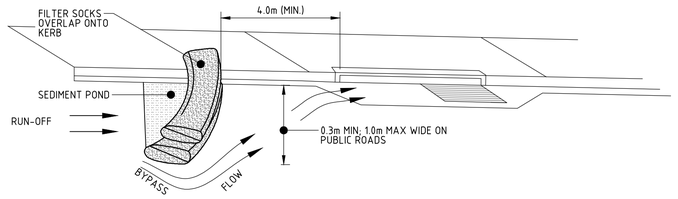


ON-GRADE KERB INLET SEDIMENT TRAP

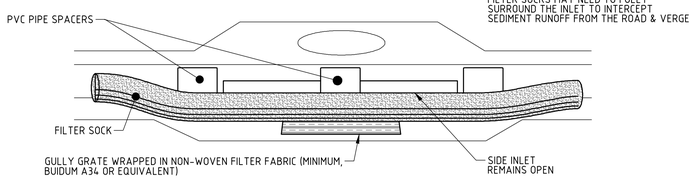


SAG KERB INLET SEDIMENT TRAP

KERB INLET PROTECTION DETAILS
NTS

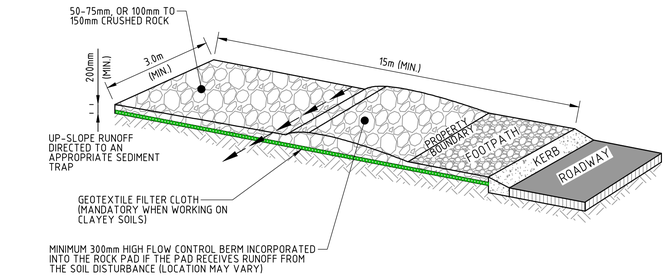


CONSTRUCTION ENTRY/EXIT - ROCK PAD PERSPECTIVE
NTS

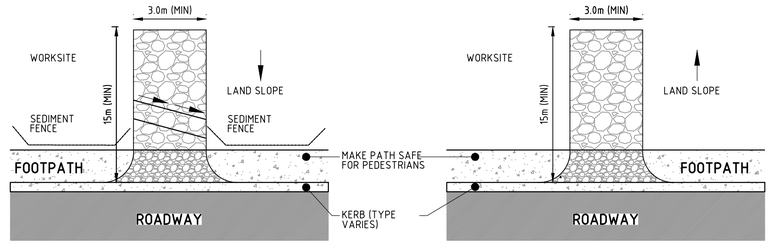

ROCK PAD SLOPING TOWARDS THE ROAD

ROCK PAD SLOPING AWAY FROM ROAD

CONSTRUCTION ENTRY/EXIT - ROCK PAD LAYOUT
NTS

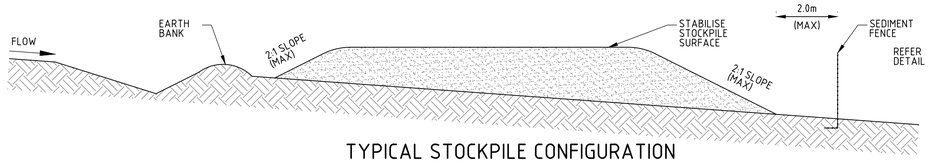

TYPICAL STOCKPILE CONFIGURATION
NTS

NOT FOR CONSTRUCTION

COPYRIGHT :
REPRODUCTION OF WHOLE OR PART OF THIS DOCUMENT CONSTITUTES AN INFRINGEMENT OF COPYRIGHT. THE INFORMATION, IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS PROHIBITED FROM DISCLOSING SUCH INFORMATION IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF THE BRISBANE AIRPORT CORPORATION PTY. LTD.

DRN	AMENDMENTS	DATE	REV
JD	ISSUED FOR TENDER	23.12.25	A
JD	ISSUED FOR TENDER	28.01.26	B
LQ	ISSUED FOR TENDER	30.01.26	C

NORTHROP
Brisbane
Level 25, 12 Creek Street, Brisbane QLD 4000
GPO BOX 423 Brisbane QLD 4001
(07) 3365 0400 brisbane@northrop.com.au
ABN 81 094 433 100

Drawn J. DENG	Checked A. DE ANDRADE
Design Coordinated R. MITCHELL	Compliance Checked S.KILLORAN
Authorised For Issue S.KILLORAN	Construction Checked N/A

SKYGATE PLAY
BRISBANE AIRPORT

EROSION AND SEDIMENT CONTROL
NOTES AND DETAILS
SHEET 1 OF 3

BRISBANE AIRPORT CORPORATION PTY LTD
11 THE CIRCUIT, BRISBANE AIRPORT QLD 4008
PO BOX 61, HAMILTON CENTRAL QLD 4007
+61 7 3406 3000
WWW.BNE.COM.AU

Scale: AS ABOVE
Size: A1
Revision: C

Drawing Number	Project No.	Originator	Volume	Level	Type	Discipline	Number
	25021 -	NRP -	XX -	XX -	DR -	CI	-000131

File: 250946-C-000131-ESCnotes.dwg
C:\12dS\data\NorthropSYN\250946 - BAC SKYGATE_572\CAD\3-DD
Pentable: ----
Printer: AUTOCAD PDF (GENERAL DOCUMENTATION)
User: Lionel Quijano
Plot Date & Time: 9/02/2026 2:16:38 PM