
LEGEND

SYMBOL	DESCRIPTION
AC	AIR CONDITIONING CONTROL PANEL (WALL MOUNTED AT 900-1100mm)
EF	EXHAUST FAN CONTROL PANEL (WALL MOUNTED AT 900-1100mm)
T	TEMPERATURE SENSOR MOUNTED AT 1500 AFL
CO2	CARBON DIOXIDE SENSOR MOUNTED AT 1500 AFL
	SHEET METAL DUCT: EXHAUST UNINSULATED, INSULATION R1.2 WITHIN A CONDITIONED SPACE, R3.0 WHERE EXPOSED TO DIRECT SUNLIGHT, R2.0 ALL OTHER LOCATIONS
	FLEXIBLE CONNECTION
SU/SD	DUCT SET UP OR SET DOWN AS NOTED IN DIRECTION OF ARROW
	FLEXIBLE DUCT WITH SPIGOTS
	DAMPER
AC-1	AIR CONDITIONER NUMBER
OAP-1	OUTSIDE AIR PACKAGED UNIT NUMBER
EF-1	EXHAUST AIR FAN NUMBER
SAF-1	SUPPLY AIR FAN NUMBER
A/P	ACCESS PANEL
DG-1	DOOR GRILLE 600x200
	REFRIGERANT PIPEWORK
	CONDENSATE PIPEWORK
	PIPE DROPPER OR RISER
td	TUNDISH - 30 DIA CONDENSATE DRAIN
	EGG CRATE EXHAUST GRILLE
	600x600 CEILING SWIRL SUPPLY AIR REGISTER T-THERMAFUSER
	600x600 EGG CRATE RETURN AIR/AIR RELIEF GRILLE
	1200x600 EGG CRATE RETURN AIR/AIR RELIEF GRILLE
	EXHAUST DISCHARGE LOUVRE
S 500	GRILLE TYPE: S - SUPPLY, R - RETURN, T - TRANSFER, E - EXHAUST l/s - AIR FLOW
S/A	SUPPLY AIR
R/A	RETURN AIR
O/A	OUTDOOR AIR
E/A	EXHAUST AIR
U/C	DOOR UNDERCUT BY 25mm
	SINGLE PHASE ELECTRICAL SUPPLY
	THREE PHASE ELECTRICAL SUPPLY
MSSB	MECHANICAL SERVICES SWITCHBOARD

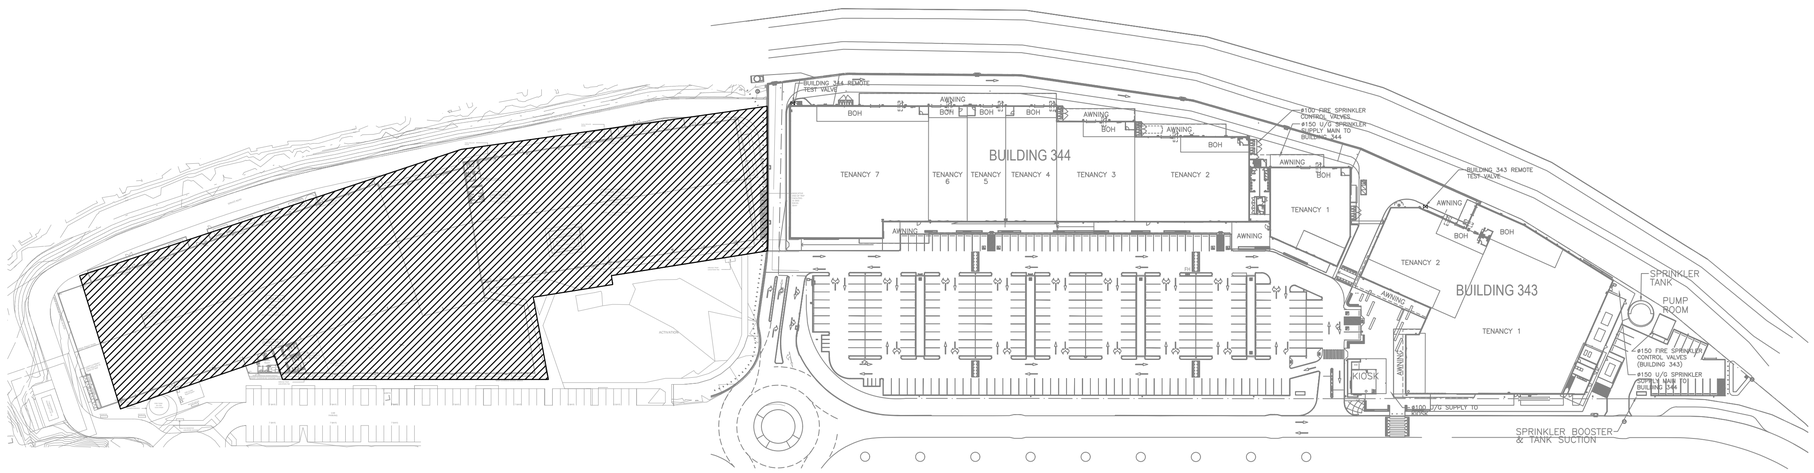

LOCALITY PLAN
SCALE 1:1000

NOTES

1. DRAWINGS TO BE READ IN CONJUNCTION WITH THE MECHANICAL SERVICES PERFORMANCE BRIEF.
2. DO NOT SCALE DRAWINGS.
3. THE SUBCONTRACTOR SHALL CHECK ALL DIMENSIONS ON ARCHITECTURAL DRAWINGS BEFORE COMMENCING WORKS.
4. ALL EXTERNAL PIPEWORK, CONDENSATE DRAINS AND ELECTRICAL CABLING TO BE CONCEALED.
5. PAINT MATTE BLACK ALL INTERNAL SURFACES OF CUSHION HEAD BOXES AND RETURN AIR PLENUMS WHICH ARE VISIBLE.
6. THE MECHANICAL CONTRACTOR IS TO CONFIRM ALL ACCESS PANEL REQUIREMENTS TO SUIT THE INSTALLATION.
7. THE MECHANICAL CONTRACTOR IS TO COORDINATE WITH THE ARCHITECT, STRUCTURAL ENGINEER, HYDRAULIC CONTRACTOR, ELECTRICAL CONTRACTOR AND OTHER SERVICES.
8. THE MECHANICAL CONTRACTOR IS TO COMPLY WITH THE SPECIFICATION, ALL BAC DESIGN GUIDELINE AND TECHNICAL SPECIFICATIONS AND ALL APPLICABLE CODES AND STANDARDS.
9. INSTALL VERMIN MESH ON ALL EXTERNAL INTAKES AND EXHAUST.
10. AIR CONDITIONING CONTROL PANEL LOCATIONS ARE PROVISIONAL ONLY. FINAL LOCATIONS ARE TO BE COORDINATED WITH THE ARCHITECT.
11. FLEXIBLE DUCTS USED FOR OUTSIDE AIR AND AIR TRANSFER ARE TO BE INSULATED FOR ACOUSTICS.
12. ALL EQUIPMENT IS TO HAVE ITS OWN ELECTRICAL ISOLATOR SWITCH.
13. ALL EQUIPMENT INCLUDING CONTROL PANELS ARE TO BE APPROPRIATELY LABELLED.
14. SUPPORTS FOR FANS, AIR CONDITIONING PLANT AND DUCTS MUST COMPLY WITH THE REQUIREMENTS OF AS1170.4.

FLEXIBLE DUCT SCHEDULE

FLEX. DIAMETER	SUPPLY, RETURN AND EXHAUST (L/s)	AIR TRANSFER (L/s)
150	0-35	0-35
200	36-80	36-65
250	81-140	66-100
300	141-220	101-140
350	221-300	141-190
400	301-380	191-250
450	381-480	251-310
500	481-590	311-390

AIR CONDITIONING INDOOR UNIT SCHEDULE

DESIGNATION	AREA SERVED	TOTAL COOLING (kW)	TYPE	REFRIGERANT
AC-1.1	AREA 51	140.0	PACKAGED	R32
AC-1.2	AREA 51	140.0	PACKAGED	R32
AC-1.3	AREA 51	140.0	PACKAGED	R32
AC-1.4	AREA 51	140.0	PACKAGED	R32
AC-1.5	AREA 51	140.0	PACKAGED	R32
AC-2.1	GAME OVER	115.0	PACKAGED	R32
AC-2.2	GAME OVER	115.0	PACKAGED	R32
AC-2.3	GAME OVER	115.0	PACKAGED	R32
AC-2.4	GAME OVER	115.0	PACKAGED	R32

OUTSIDE AIR PACKAGED UNIT WITH ERV SCHEDULE

DESIGNATION	AREA SERVED	SUPPLY AIR (L/s)	TOTAL COOLING (kW)	SUPPLY TEMP. (°C)
OAP-1	SNOW WORLD	750	60	8

FAN SCHEDULE

DESIGNATION	AREA SERVED	AIR FLOW (L/s)	CONTROL
EF-1	AREA 51	TO AS1668.2	TIMECLOCK
KEF-1	AREA 51 KITCHEN	TO AS1668.2	LOCAL CONTROL/VSD
SAF-1	AREA 51 KITCHEN	TO AS1668.2	KEF-1/VSD
EF-2	GAME OVER KITCHEN	TO AS1668.2	TIMECLOCK
KEF-2	GAME OVER KITCHEN	TO AS1668.2	LOCAL CONTROL/VSD
KSF-2	GAME OVER KITCHEN	TO AS1668.2	KEF-2/VSD

Sheet List Table

Sheet Number	Sheet Title
ME-001001	LOCALITY PLAN, LEGEND & DRAWING LIST
ME-001100	GROUND FLOOR - AIR CONDITIONING AND VENTILATION LAYOUT 1
ME-001200	GROUND FLOOR - AIR CONDITIONING AND VENTILATION LAYOUT 2

D&C PRICING ISSUE

This drawing is diagrammatic & approximate only. The (sub-)contractor shall make all allowances necessary to price the project on a Design & Construct methodology. Where items are not specifically shown or included, but are required, the (sub-)contractor shall make all allowances for such items to ensure compliant system(s) are provided that satisfy the client's expectations & operational requirements.

revision notes

COPYRIGHT :
REPRODUCTION OF WHOLE OR PART OF THIS DOCUMENT CONSTITUTES AN INFRINGEMENT OF COPYRIGHT. THE INFORMATION, IDEAS AND CONCEPTS CONTAINED IN THIS DOCUMENT ARE CONFIDENTIAL. THE RECIPIENT(S) OF THIS DOCUMENT IS PROHIBITED FROM DISCLOSING SUCH INFORMATION IDEAS AND CONCEPTS TO ANY PERSON WITHOUT THE PRIOR WRITTEN CONSENT OF THE BRISBANE AIRPORT CORPORATION PTY. LTD.

NB	D&C PRICING ISSUE	04/02/26	B
DH	D&C PRICING ISSUE	17/12/25	A
DRN	AMENDMENTS	DATE	REV

Ashburner Francis
Ashburner Francis Pty Ltd ABN 46 009 975 197
T 07 3510 8888
E brisbane@ashburnerfrancis.com.au
977 Stanley Street East, East Brisbane QLD 4169
BRISBANE | TOOWOOMBA | TOWNSVILLE | DARWIN

Archipelago
Archipelago
Level 3, 166 George Street, Brisbane QLD 4000
T +61 7 3236 4666 www.archipelago.com.au

© ARCHIPELAGO ARCHITECTS PTY. LTD. All Rights Reserved
This work is copyright and cannot be reproduced or copied by any means without written permission of Archipelago Architects Pty Ltd. Any license, express or implied, to use this document for any purpose whatsoever is restricted to the terms of the agreement between Archipelago Architects Pty Ltd and the instructing party.

Drawn: DH	Checked: SS
Design Coordinated	Compliance Checked
Authorised For Issue	Construction Checked

SKYGATE PLAY
THE CIRCUIT, BRISBANE AIRPORT

MECHANICAL SERVICES
LOCALITY PLAN, LEGEND AND DRAWING LIST

Brisbane Airport Corporation Pty Ltd
11 The Circuit Brisbane Airport QLD 4008
PO Box 61 Hamilton QLD 4007 Australia
Telephone : 61 7 3406 3000
Fascimile : 61 7 3406 3111
Email : info@bne.com.au
www.brisbaneairport.com.au
ABN 54 076 870 650

Scale	Size	Revision
AS SHOWN	A1	B

Drawing Number	Project No.	Originator	Volume	Level	Type	Role	Number
	25021	ASH	XX	XX	DR	ME	001001

File: Pentable: Printer: User: Plot Date & Time: